

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# kHz RANGE CRYSTAL UNITS (CYLINDER TYPE)

# CITIZEN®

## CFV-308, CFV-206, CFV-145, CSE-145

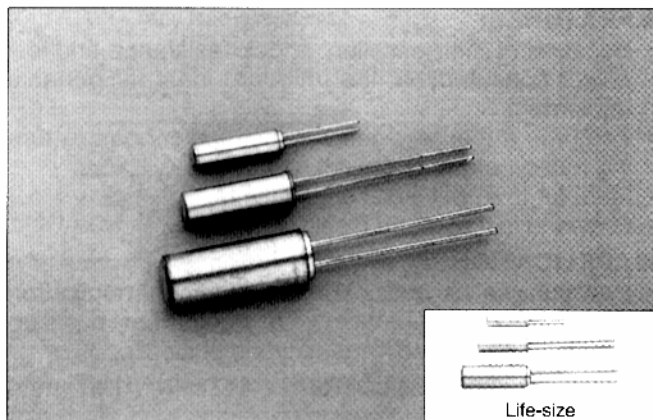




### ■ FEATURES:

- Similar to the CFS series, the CFV series features superior characteristics of a kind that only tuning fork-type crystal units can offer. Ideal for application to compact portable equipment.
- CSE-145, which adopts Citizen's unique E-shaped configuration for its crystal piece, not only boasts the world's smallest size among 1MHz-band crystals, but also features outstanding shock resistance.

### ■ APPLICATIONS:

- Because of their miniature size and excellent impact resistance, the units are ideal for such compact portable equipment as communication equipment, AV equipment and measuring instruments.

### ■ DIMENSIONS: (UNIT=mm)

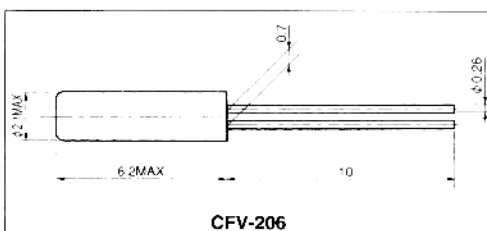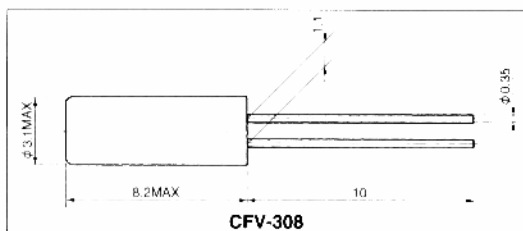

### ■ STANDARD SPECIFICATIONS

Item	Model	CFV-308	CFV-206	CFV-145	CSE-145	Conditions
Nominal frequency	$f_0$	30kHz~40kHz	30kHz~165kHz	200kHz	1MHz	Please contact us for changes in frequency.
Frequency tolerance	$\Delta f/f_0$	$\pm 30$ ppm	$\pm 30$ ppm	$\pm 10,000$ ppm	$\pm 3,000$	At 25°C
Frequency vs. Temperature characteristics	$\Delta f/f_0$	See drawing				-10°C ~ +60°C
Turnover temperature	$T_m$	25°C $\pm 5$ °C			35°C TYP.	
Temperature coefficient	$\beta$	-0.034 $\pm 0.006$ ppm/°C <sup>2</sup>				Varies depending on frequency.
Operating temperature range	$T_{OPR}$	-10°C~+60°C				
Storage temperature range	$T_{STG}$	-40°C~+85°C				
Equivalent series resistance	$R_1$	35k $\Omega$ ~50k $\Omega$		10k $\Omega$	3k $\Omega$	At 25°C
Load capacitance	$C_L$	12.5pF TYP.			8.0pF TYP.	Please specify
Motional capacitance	$C_1$	1~4fF TYP.			1fF TYP.	Varies depending on frequency.
Shunt capacitance	$C_0$	0.8~1.7pF TYP.			0.4pF TYP.	
Capacitance ratio	$\gamma$	425~800 TYP.			400 TYP.	
Drive level	DL	1 $\mu$ W MAX.				
Insulation resistance	IR	500M $\Omega$ MIN.				DC100V $\pm 15$ V
Aging (First year)	$\Delta f/f_0$	$\pm 5$ ppm MAX.				25°C $\pm 3$ °C
Sealing		1 x 10 <sup>-2</sup> $\mu$ Pa·m <sup>3</sup> /s MAX.				
Shock resistance		$\pm 5$ ppm MAX. Drop test of 3 times on a hard board from 75cm height or shock test of 3000G x 0.3ms x 1/2 sin wave x 3 directions				Conditions will vary depending on frequency.

FREQUENCY vs TEMPERATURE CURVE

