

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL



5.0 x 3.2 x 1.3mm

ABM3C

Pb in glass
(Exempt per RoHS 2002/95/EC Annex (5)) **RoHS Compliant**

Moisture Sensitivity Level – MSL – N/A (The ABM3C Series is a Hermetically Sealed device and not moisture sensitive)

FEATURES:

- Low in height; suitable for thin in equipment.
- Glass sealed package assures high reliability and high temperature operation
- Tight tolerance and stability available.
- Suitable for RoHS reflow profile

APPLICATIONS:

- Automotive applications
- High density applications.
- Modems, communication and test equipment.
- PCMCIA, Wireless applications

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10.000	-----	50.000	MHz	Fundamental
Operation Mode	Fundamental				
Operating Temperature	-10	-----	+70	°C	See options
Storage Temperature	-40	-----	+90	°C	
Frequency Tolerance @+25°C	-50	-----	+50	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-50	-----	+50	ppm	See options
Equivalent series resistance (R1)	-----	-----	60	Ω	10.000 – 15.999MHz
	-----	-----	50		16.000 – 50.000MHz
Shunt capacitance (C0)	-----	-----	7	pF	
Load capacitance (CL)	-----	18	-----	pF	Standard (See options if other than STD)
Drive Level	-----	10	100	μW	
Aging	-5	-----	+5	ppm	@25°C±3°C First year
Insulation Resistance	500	-----	-----	MΩ	@ 100Vdc ± 15V

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ABM3C - [] MHz - [] - [] - [] [] [] - []

Frequency in MHz
Please specify the frequency in MHz.
e.g. 14.31818MHz

Load Capacitance (pF)
Please specify CL in pF or S for series

Custom ESR if other than standard
R□
□: Specify a value in Ω (e.g.: R40)

Operating Temp.

E: 0°C ~ +70°C
B: -20°C ~ +70°C
C: -30°C ~ +70°C
N: -30°C ~ +85°C
D: -40°C ~ +85°C
J(***): -40°C ~ +105°C
K(***): -40°C ~ +125°C

Freq. Tolerance

2: ± 20 ppm
3: ± 25 ppm
4: ± 30 ppm


Packaging

Blank: Bulk
T: Tape & Reel

Freq. Stability

Y*: ± 30 ppm
H*: ± 35 ppm
A**: ± 80 ppm
Q**: ± 100 ppm
V: ± 120 ppm

* Standard temp. or option E, B, C, N, D only
** Stability option Q and V only
*** Stability option V only



CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL

ABM3C





5.0 x 3.2 x 1.3mm

ABM3C

Pb in glass
(Exempt per RoHS 2002/95/EC Annex (5))

RoHS
Compliant


OUTLINE DRAWING:

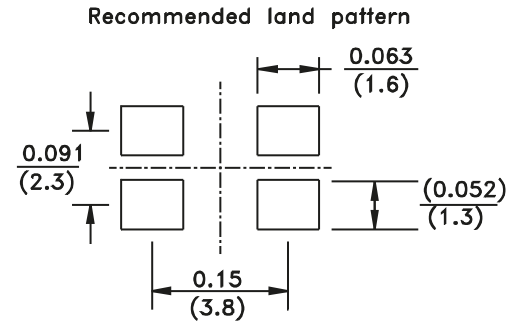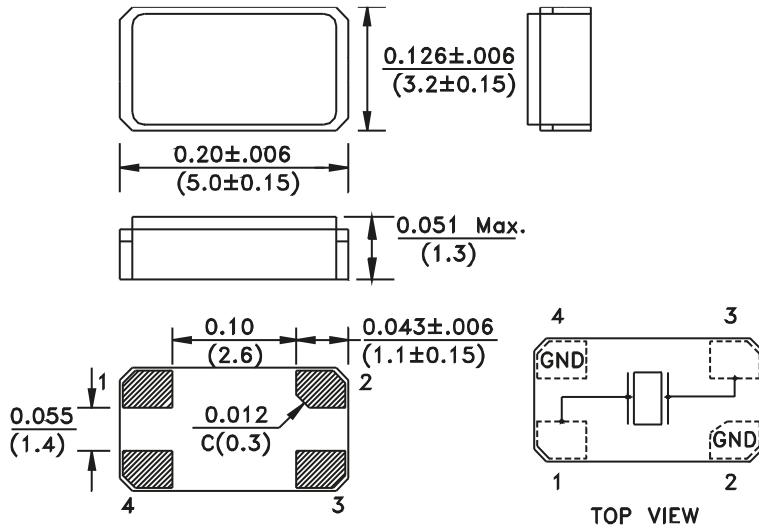

Dimensions: inches (mm)


TAPE & REEL:

1000pcs/reel

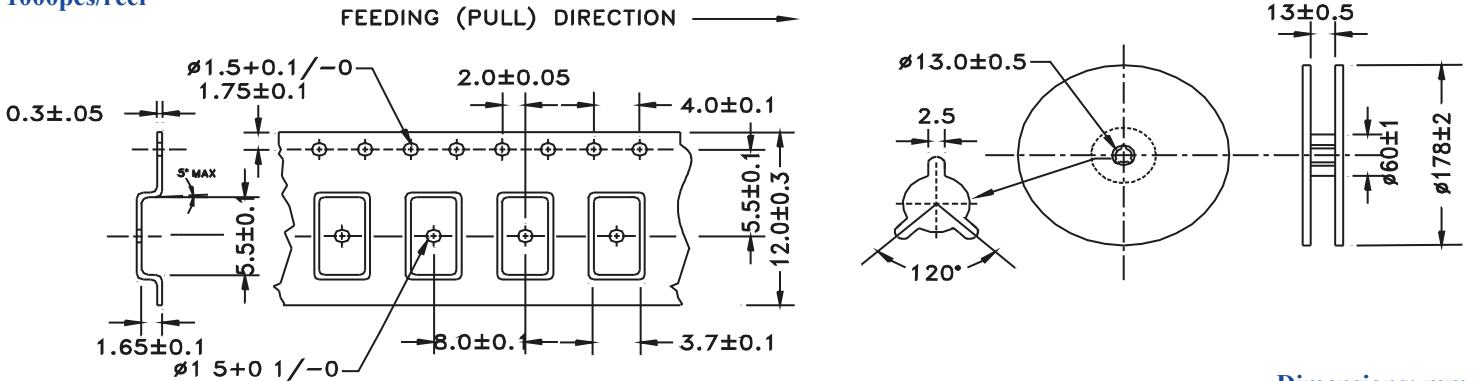

Dimensions: mm

REFLOW PROFILE:

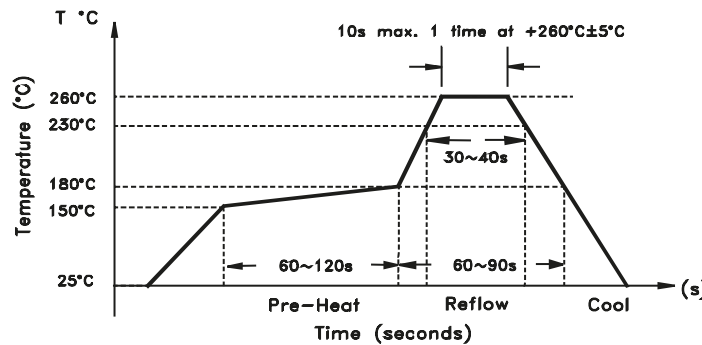

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale Revised: 12.29.11

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com