

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASHK SERIES



RoHS Compliant



4.0 x 2.5 x 0.9 mm

FEATURES:

- Ultra low uA current consumption with CMOS output
- Miniature ceramic package (4.0 x 2.5 x 0.9mm)
- Operating Temp -40°C to +85°C
- Start up time less than 1 sec with supply voltage 1.5 to 5.5V
- Tri-state function
- Pb-free reflow capable

APPLICATIONS:

- General purpose clock generator for digital systems
- Clock drivers for Real Time Clocks
- Timekeeping in network servers and computers
- Electricity, gas and water metering
- Portable field communication
- Mobile phone
- Clock & Data recovery
- CCD clock for VTR camera
- Computers and peripherals
- Portable MP3 players & games

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ASHK Series
Frequency range:	32.768kHz
Operating temperature:	-20° C to + 70° C (see options)
Storage temperature:	- 55° C to + 125° C
Frequency tolerance:	+5 ± 20ppm @ +25° C Vdd=3.3V; referenced to 32.768kHz
Overall frequency stability:	-120 to +10 ppm over -20 to +70° C; referenced to frequency measured @ 25 °C
Supply voltage (Vdd):	3.3 V ± 5% (see options. 1.5 to 5.5V)
Supply current:	Please see Table 1
Symmetry:	40/60 % @ 1/2Vdd
Rise and fall time (Tr/Tf):	200ns max. (10% to 90%Vdd, CL=15pF)
Startup time:	1 sec max. for Vdd=3.3V @ +25° C
Output load:	CMOS (15 pF max.)
Output voltage (CL=15pF @ +25 °C):	VOH = Vdd-0.4V min. VOL = 0.4V max.
Tri-state function:	"1" (VIH >= 0.9*Vdd) (Pin must be set "1" to oscillate) "0" (VIL < 0.1*Vdd) : Hi Z
Stand-by current:	250nA max. @ +25° C
Aging (first year) 25°C ± 3°C:	± 5ppm max.
Aging (10 years) 25°C ± 3°C:	± 10ppm max.

TABLE 1

Vdd (V)	Supply Current (µA typ.)	Supply Current (µA max.)
3.3 (STD)	1.4	1.5
5.5	2.2	2.4
2.8	1.2	1.4
1.8	1.0	1.2
1.5	0.8	1.0

OPTIONS & PART IDENTIFICATION:


(Left blank if standard)

ASHK□ - 32.768kHz - □ - □

Supply Voltage		Frequency Temp Characteristics		Packaging	
Blank	3.3V	Blank	-20°C to +70°C / -90 to +10 ppm	Blank	Bulk
2	5.5V	L	-40°C to +85°C / -140 to +10 ppm	T	Tape and Reel
3	2.8V				
4	1.8V				
5	1.5V				

Please contact ABRACON for more information.

TYPICAL TEMP CHARACTERISTICS

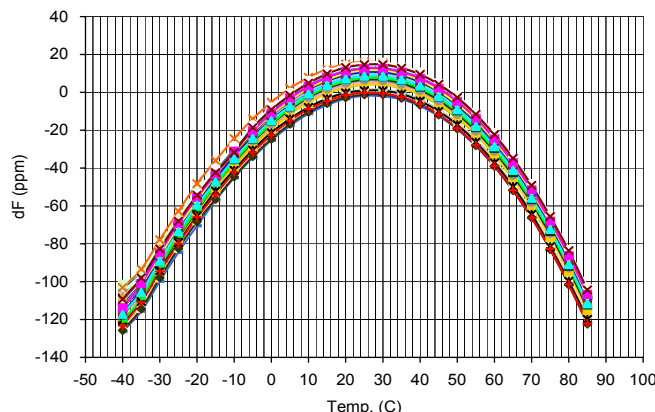

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 11.24.09**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR



ASHK



4.0 x 2.5 x 0.9 mm



RoHS
Compliant

ASHK SERIES

OUTLINE DRAWING:

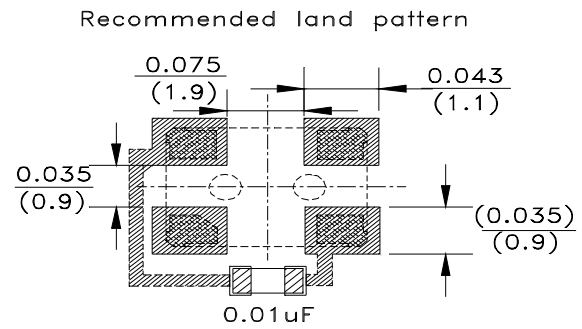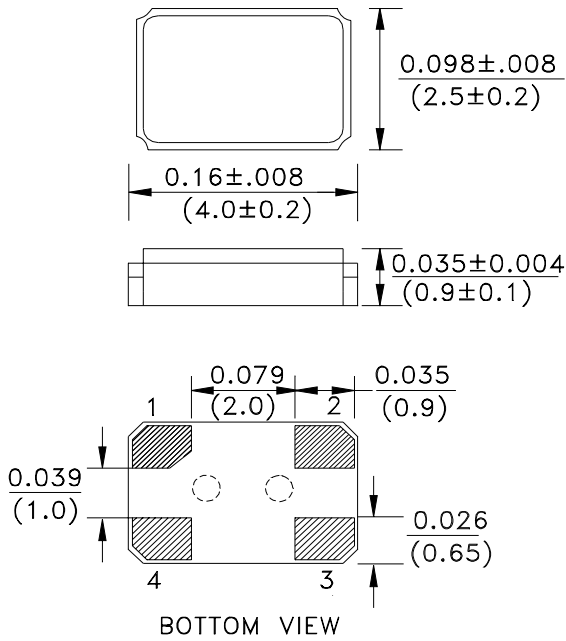

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.


PIN	FUNCTION
1	Tristate
2	GND/Case
3	Output
4	Vdd

Please remain pin 1 "High" if you do not use the Tri-state function.

Dimensions: Inches (mm)


Sealing Method: Seam Sealing

TAPE & REEL: Tape and reel 1,000pcs/reel

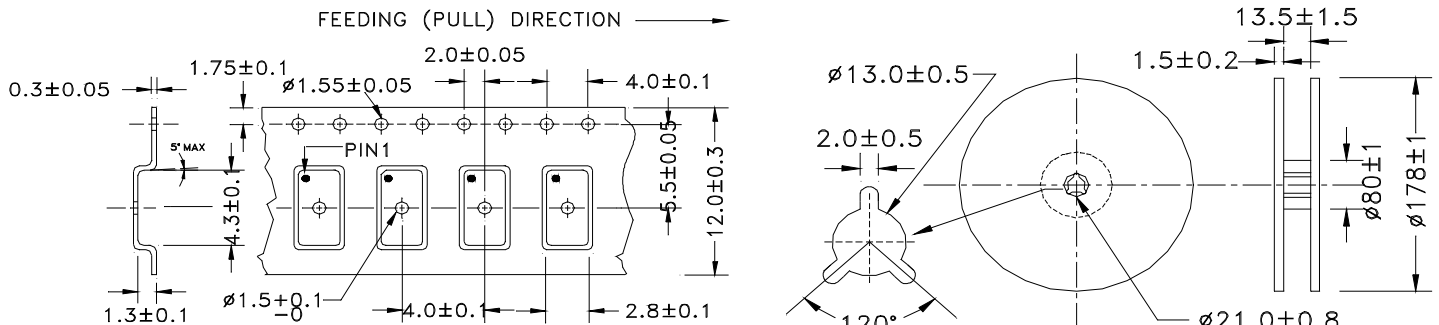

Dimensions: mm

REFLOW PROFILE

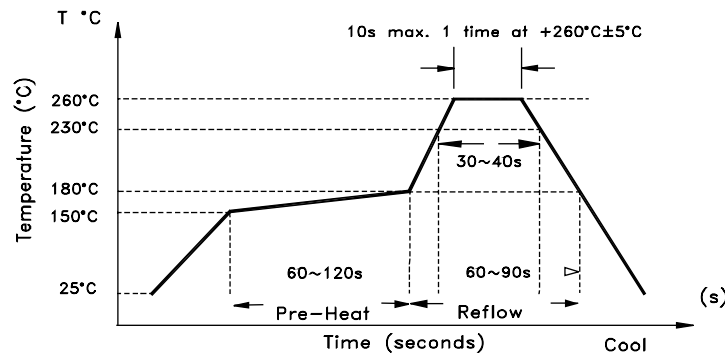

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 11.24.09**
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com