

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



N-Channel JFETs

PRODUCT SUMMARY				
Part Number	V _{GS(off)} (V)	V _{(BR)GSS} Min (V)	g _{fs} Min (mS)	I _{DSS} Min (mA)
2N4416	- ≤ 6	-30	4.5	5
2N4416A	-2.5 to -6	-35	4.5	5
SST4416	- ≤ 6	-30	4.5	5

FEATURES

- Excellent High-Frequency Gain: 2N4416/A, Gps 13 dB (typ) @ 400 MHz
- Very Low Noise: 3 dB (typ) @ 400 MHz
- Very Low Distortion
- High AC/DC Switch Off-Isolation

BENEFITS

- Wideband High Gain
- Very High System Sensitivity
- High Quality of Amplification
- High-Speed Switching Capability
- High Low-Level Signal Amplification


APPLICATIONS

- High-Frequency Amplifier/Mixer
- Oscillator
- Sample-and-Hold
- Very Low Capacitance Switches

DESCRIPTION


The 2N4416/2N4416A/SST4416 n-channel JFETs are designed to provide high-performance amplification at high frequencies.

The TO-206AF (TO-72) hermetically-sealed package is available with full military processing (see Military Information.) The TO-236 (SOT-23) package provides a low-cost option and is available with tape-and-reel options (see Packaging Information). For similar products in the TO-226AA (TO-92) package, see the J304/305 data sheet.



Top View

2N4416
2N4416A



Top View

SST4416 (H1)*

*Marking Code for TO-236

For applications information see AN104.



Vishay Siliconix

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage :	Operating Junction Temperature	-55 to 150 °C
(2N/SST4416)	Power Dissipation :	(2N Prefix) ^a 300 mW
(2N4416A)	(SST Prefix) ^b	350 mW
Gate Current	Notes	
.	a. Derate 2.4 mW/°C above 25°C	
Lead Temperature	b. Derate 2.8 mW/°C above 25°C	
Storage Temperature :		
(2N Prefix)		
(SST Prefix)		

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

SPECIFICATIONS (T _A = 25 °C UNLESS NOTED)										
Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit
				2N4416		2N4416A		SST4416		
				Min	Max	Min	Max	Min	Max	
Static										
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-36	-30		-35		-30		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 15 V, I _D = 1 nA	-3		-6	-2.5	-6		-6	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 15 V, V _{GS} = 0 V	10	5	15	5	15	5	15	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -20 V, V _{DS} = 0 V (2N)	-2		-100		-100			pA
		T _A = 150°C	-4		-100		-100			
		V _{GS} = -15 V, V _{DS} = 0 V (SST)	-0.002						-1	nA
T _A = 125°C	-0.6									
Gate Operating Current	I _G	V _{DG} = 10 V, I _D = 1 mA	-20							pA
Drain Cutoff Current ^c	I _{D(off)}	V _{DS} = 10 V, V _{GS} = -6 V	2							
Drain-Source On-Resistance ^c	r _{DS(on)}	V _{GS} = 0 V, I _D = 300 μA	150							Ω
Gate-Source Forward Voltage ^c	V _{GS(F)}	I _G = 1 mA, V _{DS} = 0 V	0.7							V
Dynamic										
Common-Source Forward Transconductance ^b	g _{fs}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 kHz	6	4.5	7.5	4.5	7.5	4.5	7.5	mS
Common-Source Output Conductance ^b	g _{os}		15		50		50		50	μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 MHz	2.2		4		4			pF
Common-Source Reverse Transfer Capacitance	C _{rss}		0.7		0.8		0.8			
Common-Source Output Capacitance	C _{oss}		1		2		2			
Equivalent Input Noise Voltage ^c	e _n	V _{DS} = 10 V, V _{GS} = 0 V f = 1 kHz	6							nV/ √Hz







HIGH-FREQUENCY SPECIFICATIONS FOR 2N4416/2N4416A (T _A = 25 °C UNLESS NOTED)							
Parameter	Symbol	Test Conditions	Limits				Unit
			100 MHz		400 MHz		
			Min	Max	Min	Max	
Common Source Input Conductance ^d	g_{iss}	$V_{DS} = 15\text{ V}, V_{GS} = 0\text{ V}$		100		1,000	μS
Common Source Input Susceptance ^d	b_{iss}			2,500		10,000	
Common Source Output Conductance ^d	g_{oss}			75		100	
Common Source Output Susceptance ^d	b_{oss}			1,000		4,000	
Common Source Forward Transconductance ^d	g_{fs}					4,000	
Common-Source Power Gain ^d	G_{ps}	$V_{DS} = 15\text{ V}, I_D = 5\text{ mA}$	18		10		dB
Noise Figure ^d	NF	$R_G = 1\text{ k}\Omega$		2		4	

Notes







- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.
- c. This parameter not registered with JEDEC.
- d. Not a production test.

NH

TYPICAL CHARACTERISTICS (T_A = 25 °C UNLESS OTHERWISE NOTED)



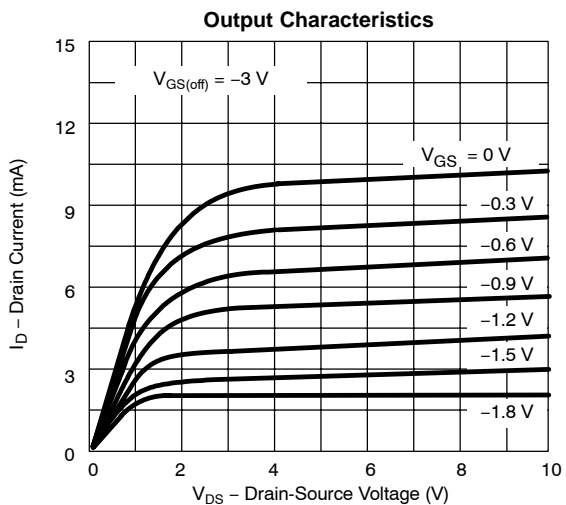
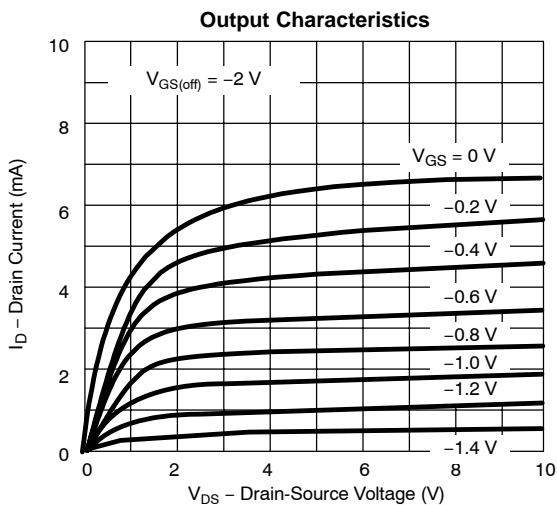
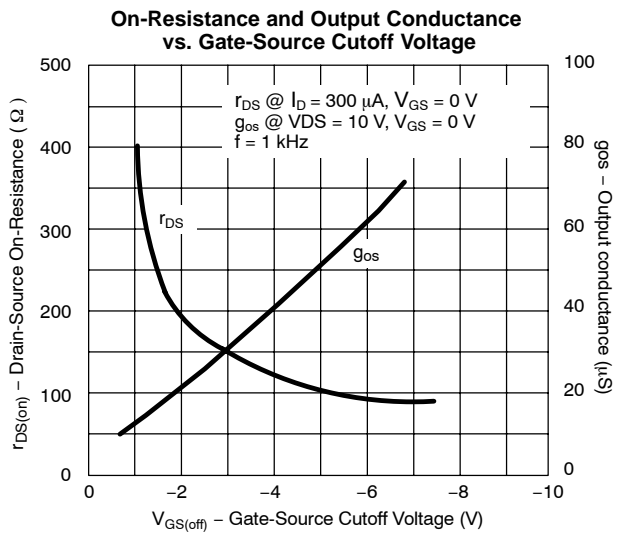
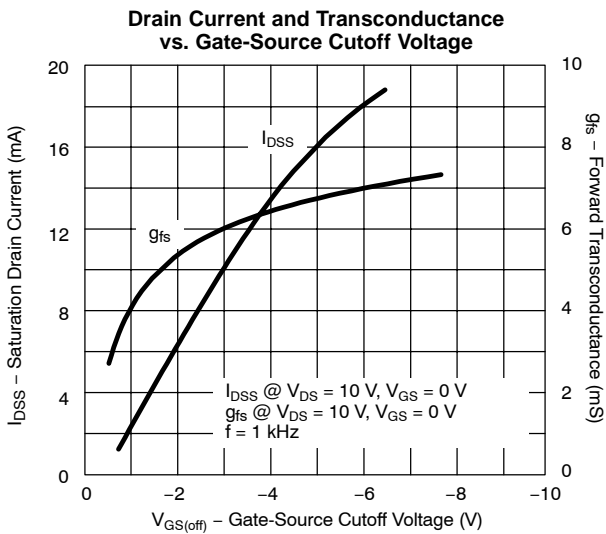


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

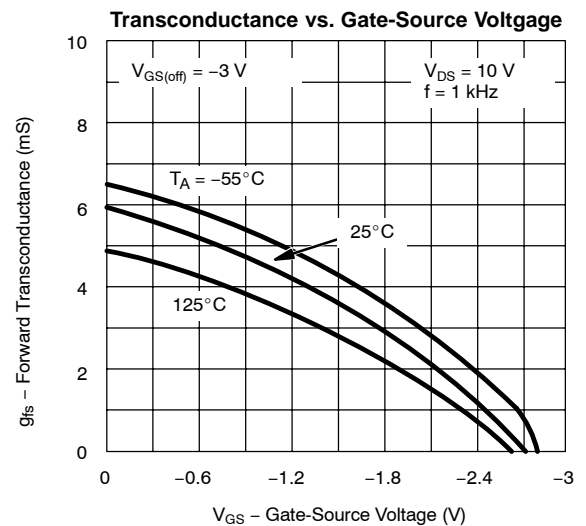
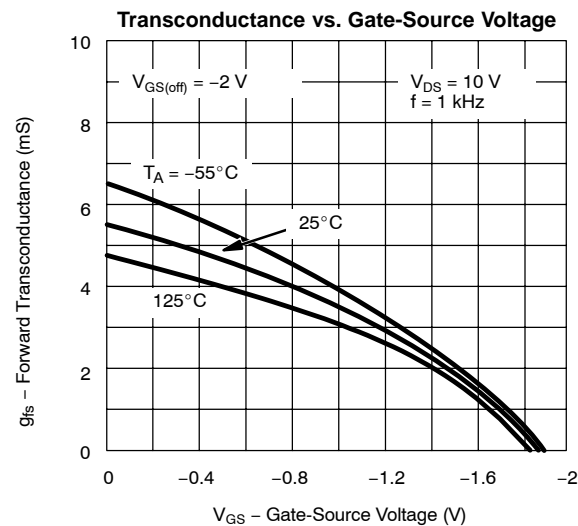
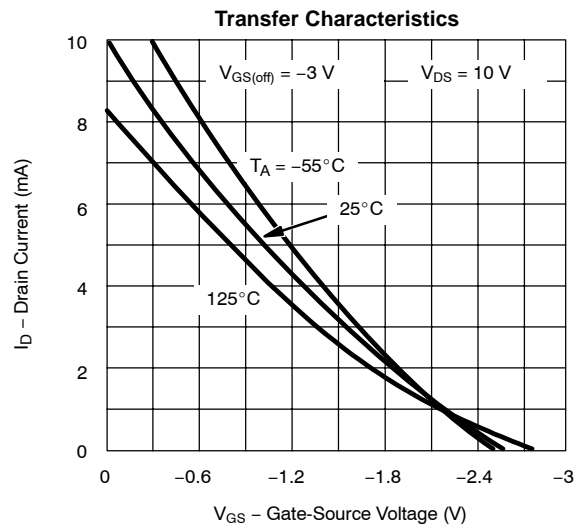
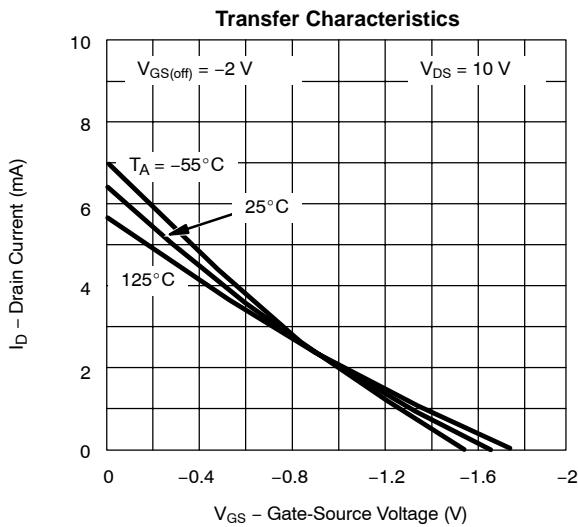
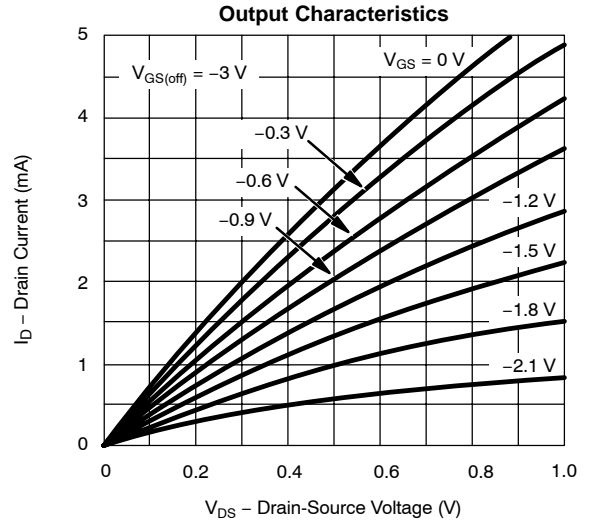
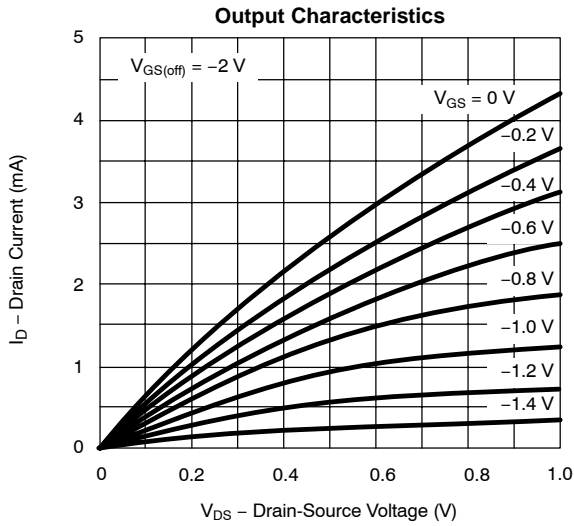




TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)

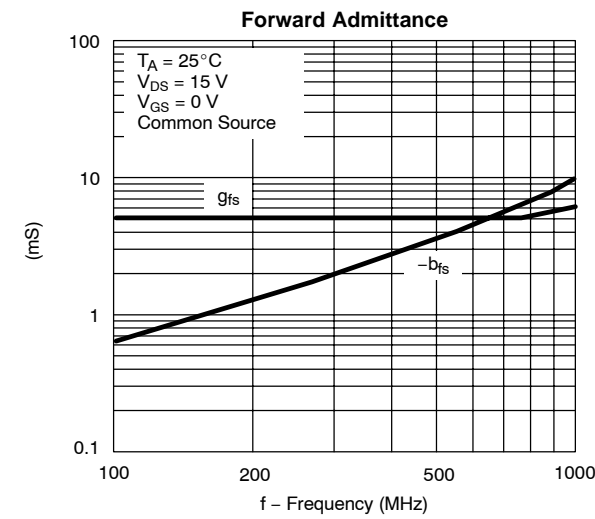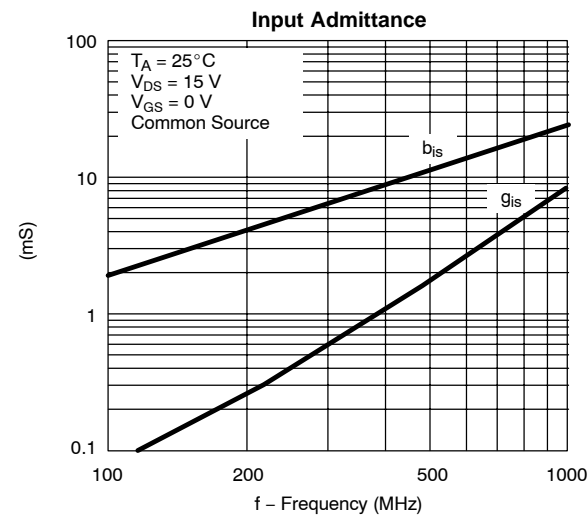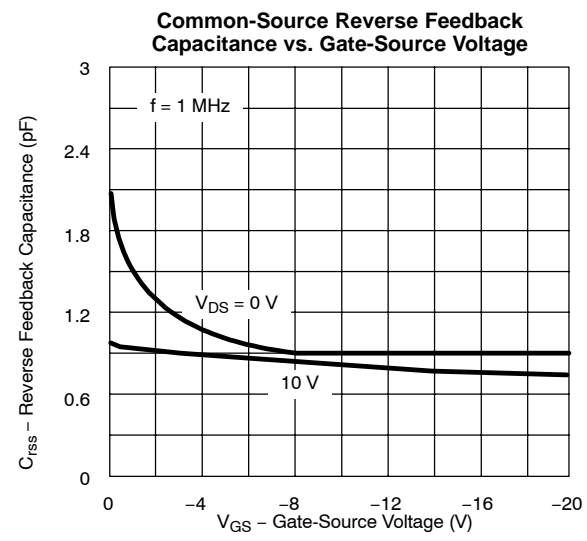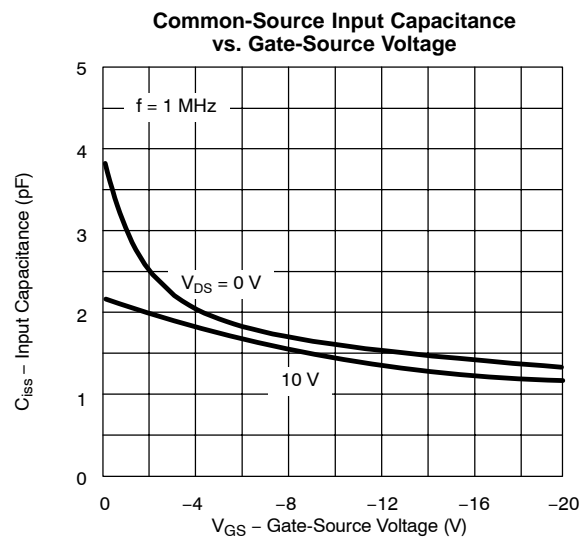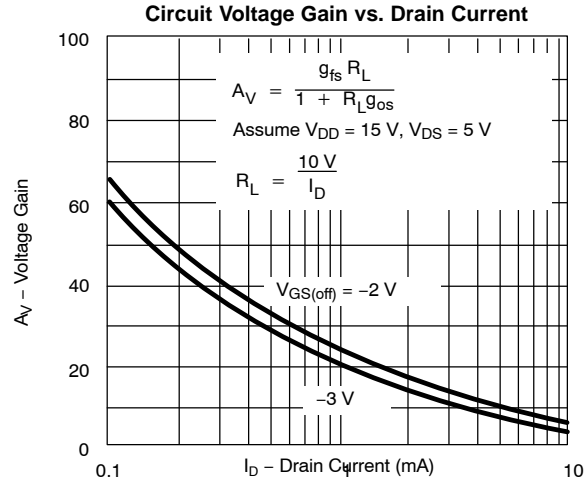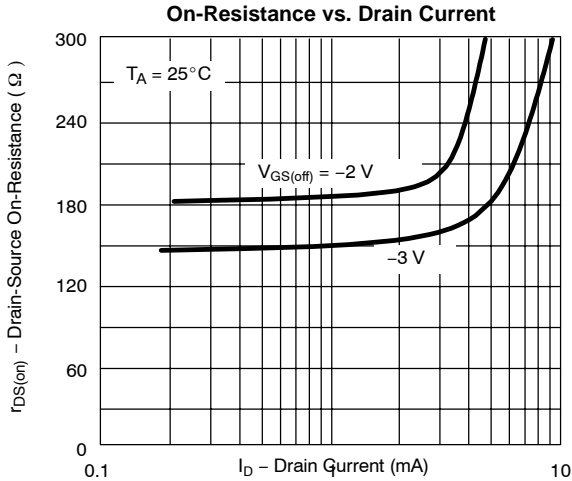

TYPICAL CHARACTERISTICS (T_A = 25 °C UNLESS OTHERWISE NOTED)

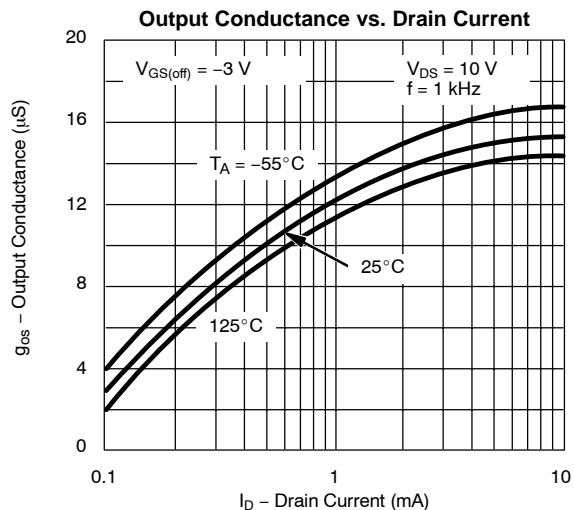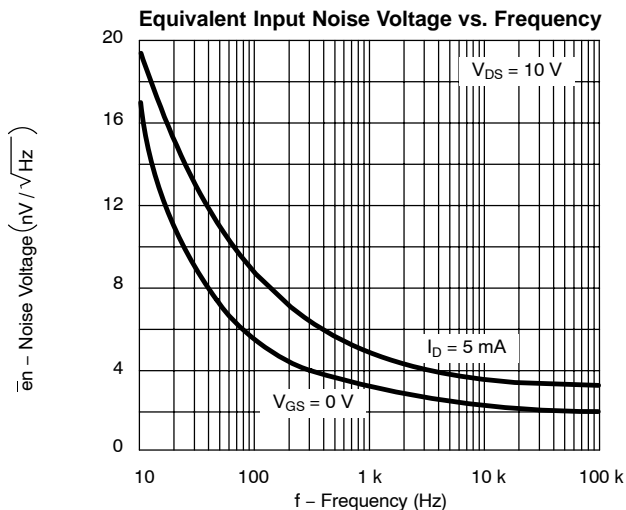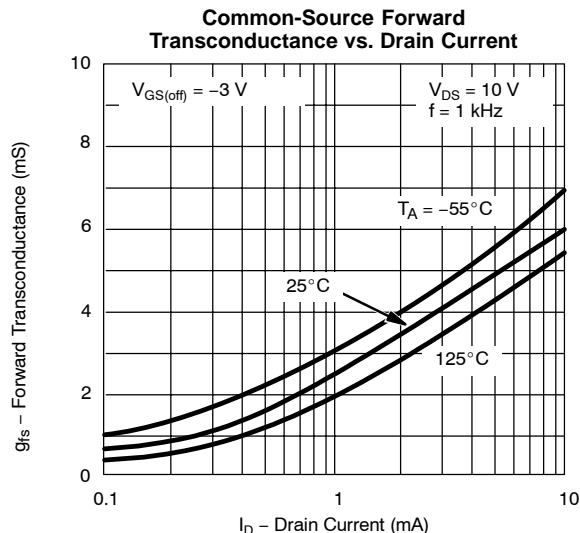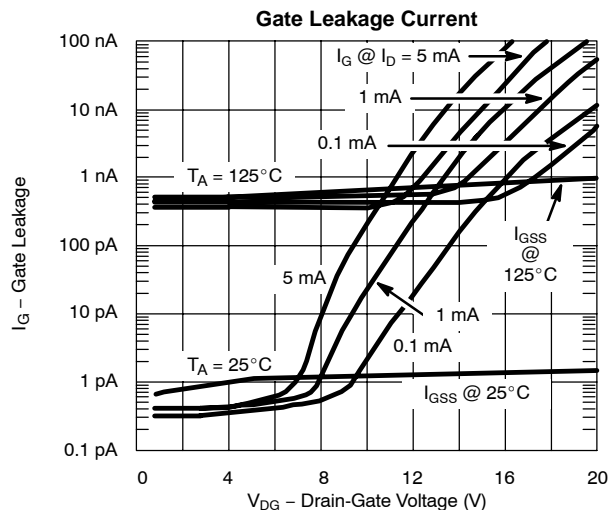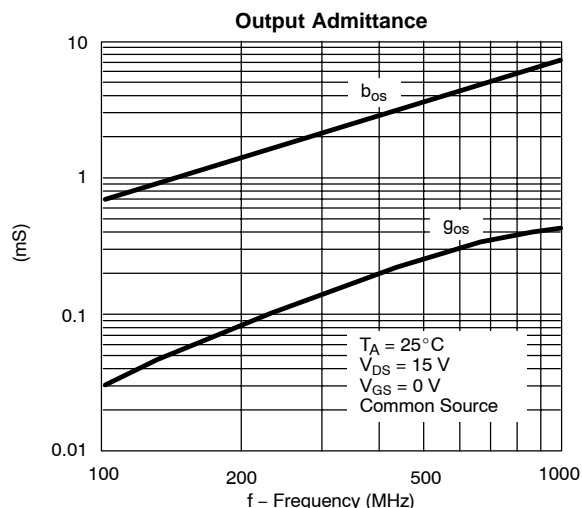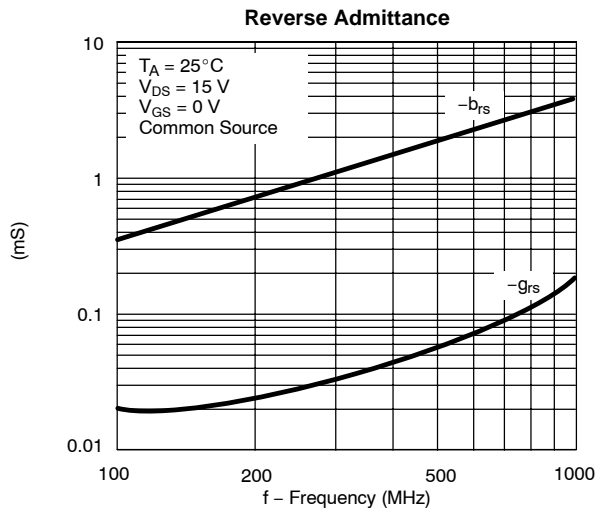

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?70242>.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.