

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Phase Control Thyristor

ISOPLUS220™


Electrically Isolated Back Surface

$$V_{RRM} = 800 - 1200 \text{ V}$$


$$I_{T(RMS)} = 35 \text{ A}$$

$$I_{T(AV)M} = 13 \text{ A}$$

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
800	800	CS 19-08ho1C
1200	1200	CS 19-12ho1C



ISOPLUS 220™

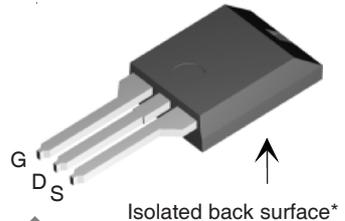

Symbol	Test Conditions	Maximum Ratings	
$I_{T(RMS)}$	$T_{VJ} = T_{VJM}$	35	A
$I_{T(AV)M}$	$T_C = 85^\circ\text{C}; 180^\circ \text{ sine}$	13	A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}; V_R = 0 \text{ V}$	$t = 10 \text{ ms (50 Hz), sine}$	100 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	105 A
I^2t	$T_{VJ} = T_{VJM}; V_R = 0 \text{ V}$	$t = 10 \text{ ms (50 Hz), sine}$	85 A ² s
		$t = 8.3 \text{ ms (60 Hz), sine}$	90 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ repetitive, $I_T = 20 \text{ A}$ $f = 50 \text{ Hz}, t_p = 200 \mu\text{s}$ $V_D = 2/3 V_{DRM}$		100 A/ μs
	$I_G = 0.08 \text{ A}$ non repetitive, $I_T = I_{T(AV)M}$ $di_G/dt = 0.08 \text{ A}/\mu\text{s}$		500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}; V_{DR} = 2/3 V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)		500 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$ $t_p = 30 \mu\text{s}$	5	W
P_{GAV}	$I_T = I_{T(AV)M}$ $t_p = 300 \mu\text{s}$	2.5	W
V_{RGM}		0.5	W
T_{VJ}		10	V
T_{VJM}		-40...+125	°C
T_{stg}		125	°C
V_{ISOL}	50/60 Hz RMS; $I_{ISOL} \leq 1 \text{ mA}$	-40...+125	°C
T_L	1.6mm from case; 10s	2500	V~
F_C	Mounting force	260	°C
Weight		11...65 / 2.4...11	N / lb
		2	g

Features

Features

- Silicon chip on Direct-Copper-Bond substrate
- High power dissipation
- Isolated mounting surface
- 2500V electrical isolation
- Low cathode-to-tab capacitance (15pF typical)
- Planar passivated chips
- Epoxy meets UL 94V-0
- High performance glass passivated chip
- Long-term stability of leakage current and blocking voltage

Applications


- Motor control
- Power converter
- AC power controller
- Light and temperature control
- SCR for inrush current limiting in power supplies or AC drive

Advantages

- Space and weight savings
- Simple mounting

Symbol	Test Conditions	Characteristic Values
I_{R^1}, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	≤ 1 mA
V_T	$I_T = 30$ A; $T_{VJ} = 25^\circ\text{C}$	≤ 1.65 V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)	0.87 V
r_T		29 m Ω
V_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 1.5 V ≤ 2.5 V
I_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤ 25 mA ≤ 50 mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}		≤ 3 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10$ μs $I_G = 0.08$ A; $di_G/dt = 0.08$ A/ μs	≤ 75 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6$ V; $R_{GK} = \infty$	≤ 50 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.08$ A; $di_G/dt = 0.08$ A/ μs	≤ 2 μs
R_{thJC}	DC current	1.7 K/W
R_{thCK}	DC current	typical 0.6 K/W
a	Max. acceleration, 50 Hz	50 m/s ²

ISOPLUS220 OUTLINE

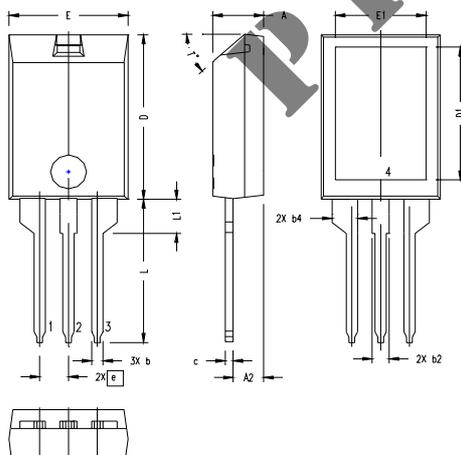

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.157	.197	4.00	5.00
A2	.098	.118	2.50	3.00
b	.035	.051	0.90	1.30
b2	.049	.065	1.25	1.65
b4	.093	.100	2.35	2.55
c	.028	.039	0.70	1.00
D	.591	.630	15.00	16.00
D1	.472	.512	12.00	13.00
E	.394	.433	10.00	11.00
E1	.295	.335	7.50	8.50
e	.100 BASIC		2.55 BASIC	
L	.512	.571	13.00	14.50
L1	.118	.138	3.00	3.50
T*			42.5°	47.5°

NOTE:

- Bottom heatsink (Pin 4) is electrically isolated from Pin 1, 2, or 3.
- This drawing will meet dimensional requirement of JEDEC SS Product Outline TO-273 except D and D1 dimension.