


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

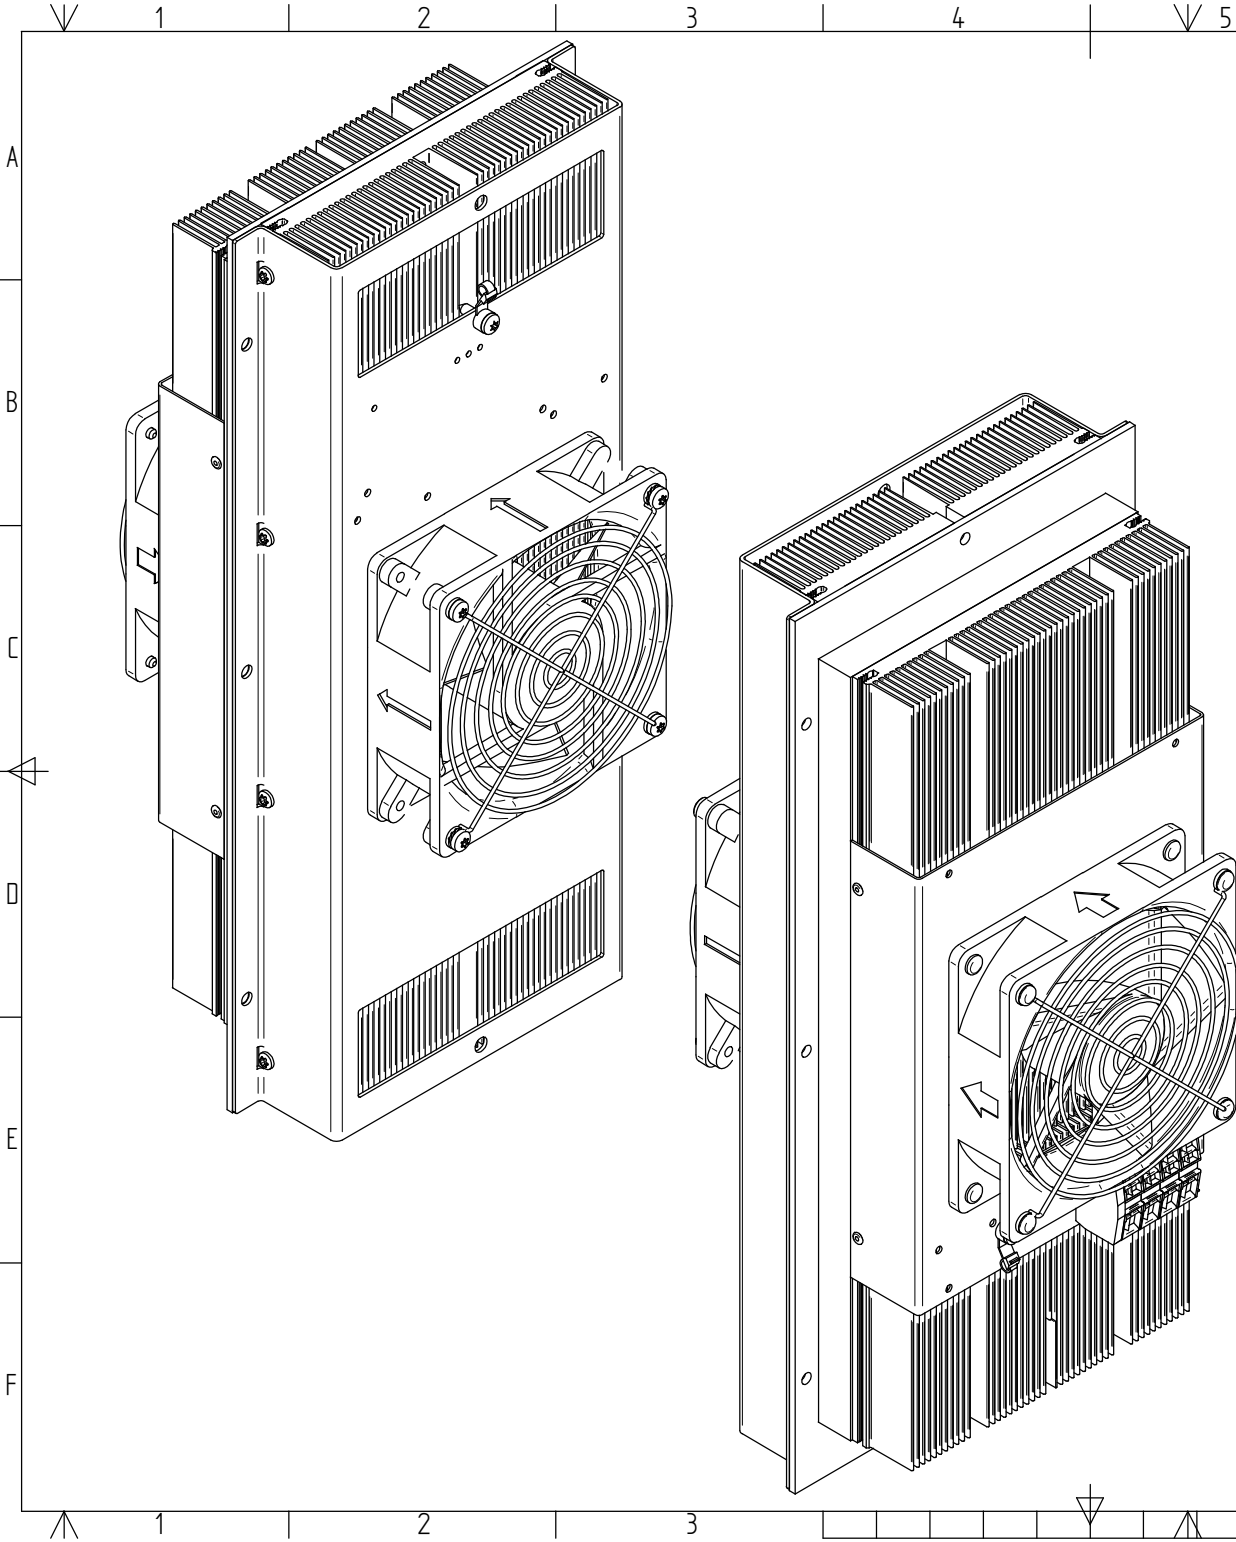


Specification: (Ta=35°C)	Code:	Description:
Heat transfer, cold side:	A	Air
Heat transfer, warm side:	A	Air
Cascade:	-	
Cooling power: [W]	180	Calculated 180 W at dT=0°C. Tolerance: ±10%.
Voltage, nominal: [VDC]	24	24 VDC
TEM Voltage: [VDC]		Nominal: 24 VDC, Max: 30 VDC
TEM Current: [A]		Nominal: 9.9 A, Initial: 13.1 A, All at dT=0°C. Tolerance: ±10%.
Fans, cold side:	2	L10: 50,000 hrs. at 25°C. Nominal current: 0.25 A. Voltage: 24 VDC ±10%. Max ripple = 3 %
Fans, warm side:	4	L10: 70,000 hrs. at 40°C. Nominal current: 0.48 A. Voltage range: 16-30 VDC IP54. Max ripple = 3 %
Temperature controller, sensor:	0	None.
Temperature control settings, trim options:	0	-
Additional controller information:		-
Temperature control position:	1	Power input connector on cold side fan bracket.
Options:	0	-
Overheating thermostat:		75°C ±5°C. Internally on hot side heat sink surface.
Operating temperature:		-10°C to +56°C
TE-Module temperature specification:		Max. surface temperature: 80°C.
Enclosed:		-
Packing:		Individual cardboard box.

General tolerances: SS-ISO 2768-1 v	First angle projection:	Dimension units: Metric: [mm]
--	-------------------------	----------------------------------

Comment / Deviations:
Warm side of unit designed to comply with IP54. Hi-Pot tested 750VDC.

Designed by: A. Kim	Checked by: S. Winberg	Approved by: C. Johansson	Release date: 2011-10-18	Project: Standard	Customer:
			Title: TE ASSEMBLY AIR-AIR200, 24VDC		
Laird Technologies S-43153 Molndal, Sweden tfn: +46 31 420530, fax: +46 31 247909 e-mail: info@lairdtech.com Web: www.lairdtech.com			Part nr: AA-200-24-24-00-10	Rev: 06	Version: 1:2
			Scale: A3, 1/4)	Size, sheet	

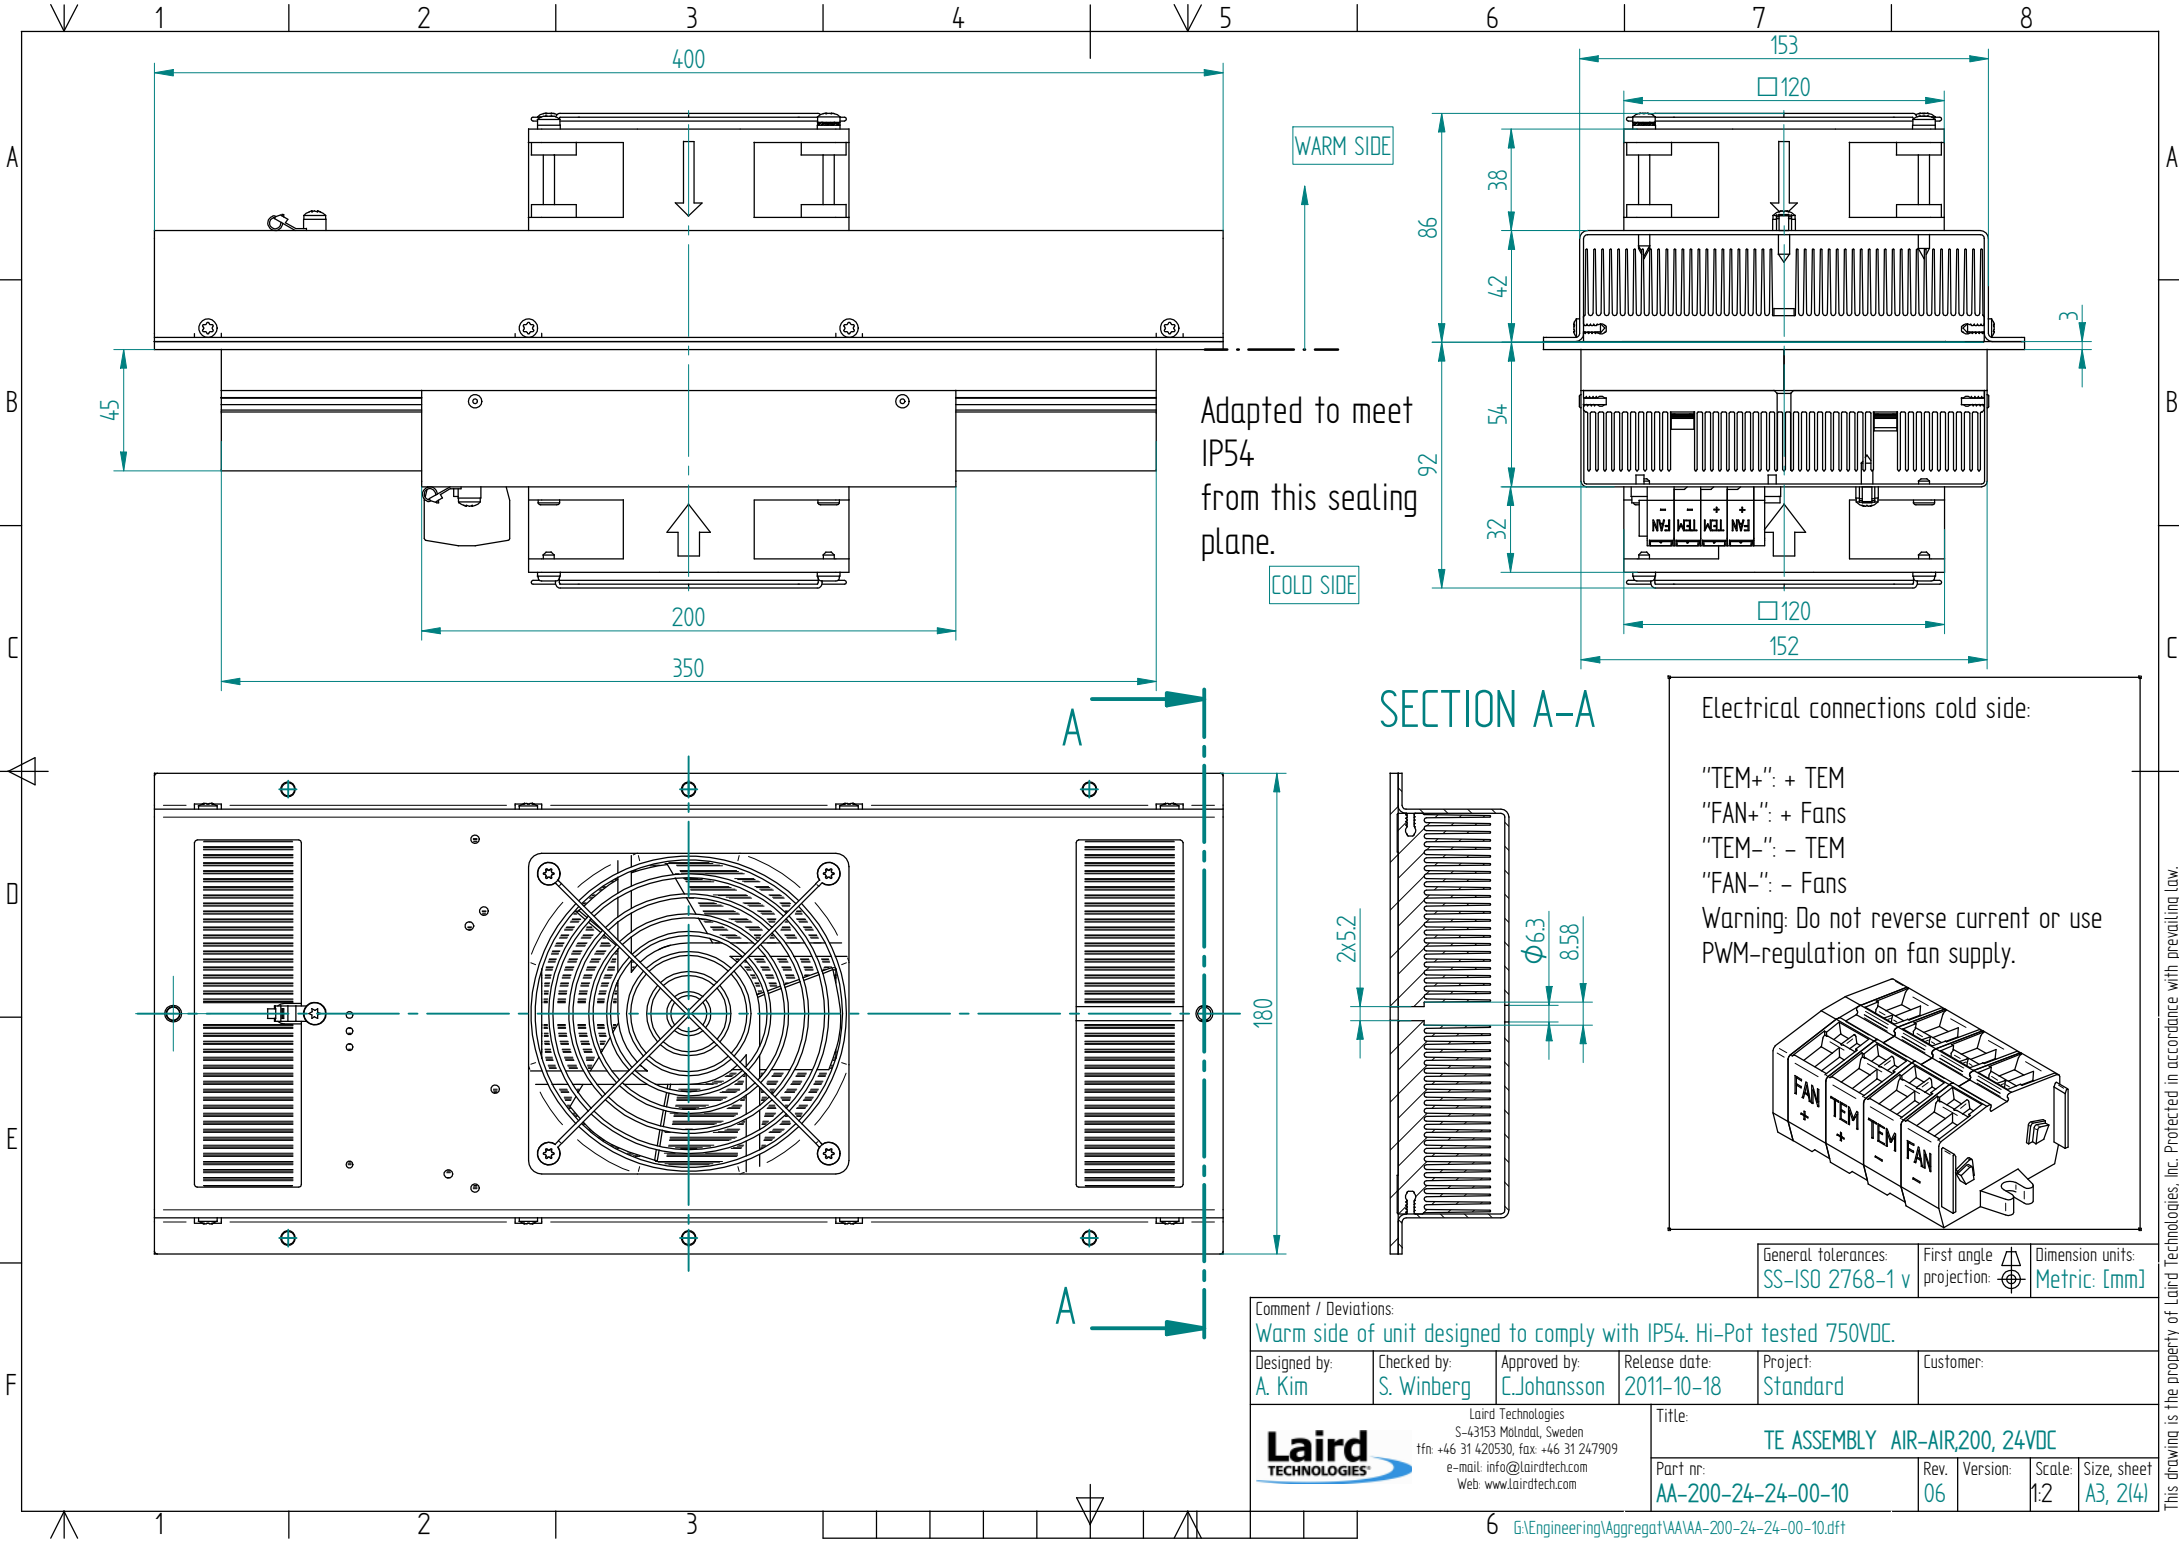

Adapted to meet IP54 from this sealing plane.

SECTION A-A

Electrical connections cold side:

- "TEM+": + TEM
- "FAN+": + Fans
- "TEM-": - TEM
- "FAN-": - Fans

Warning: Do not reverse current or use PWM-regulation on fan supply.

General tolerances: SS-ISO 2768-1 v	First angle projection:	Dimension units: Metric: [mm]
--	-------------------------	----------------------------------

Comment / Deviations: Warm side of unit designed to comply with IP54. Hi-Pot tested 750VDC.					
Designed by: A. Kim	Checked by: S. Winberg	Approved by: C. Johansson	Release date: 2011-10-18	Project: Standard	Customer:
			Title: TE ASSEMBLY AIR-AIR200, 24VDC		
Laird Technologies S-43153 Molndal, Sweden tfn +46 31 420530, fax: +46 31 247909 e-mail: info@lairdtech.com Web: www.lairdtech.com			Part nr: AA-200-24-24-00-10	Rev: 06	Version: 1:2
			Scale: A3, 2(4)	Size, sheet	

Thermoelectric AIR conditioner - AA-200-24-24-00-10

2x ϕ 5.2
(2 holes to mount the unit (optional).)

6x ϕ 5.5
(6 holes used to mount the unit.)



Installation and Service manual

Installation:

1. The TE assembly is mounted in a cabinet with "Warm sidemounted externally."
2. Suitable cabinet cutout is 155x352 mm.
3. Recommended for general purposes: the TE assembly is fastened with 8xM5 machine screws, 8x M5 flat washers, 8x M5 tooth washers and 8x M5 nuts so that the gasket material will seal off around the flange of the assembly.
4. **The TE assembly must be positioned in vertical direction (heat sink fins in vertical direction).**
5. The TE assembly must be protected from external force or violence.
6. Fuse should be placed on the incoming wires by the customer. 20 A, Fast acting or Very Fast Acting, enhanced breaking capacity. The fuse should withstand 1.3xIn for a minimum of 60 seconds. External fuse must protect the input power lines.

Service:

Fan impellers and heat sinks must be cleaned on regular intervals to reduce risk for overheating and reduction of cooling function. The interval may vary depending on environment.

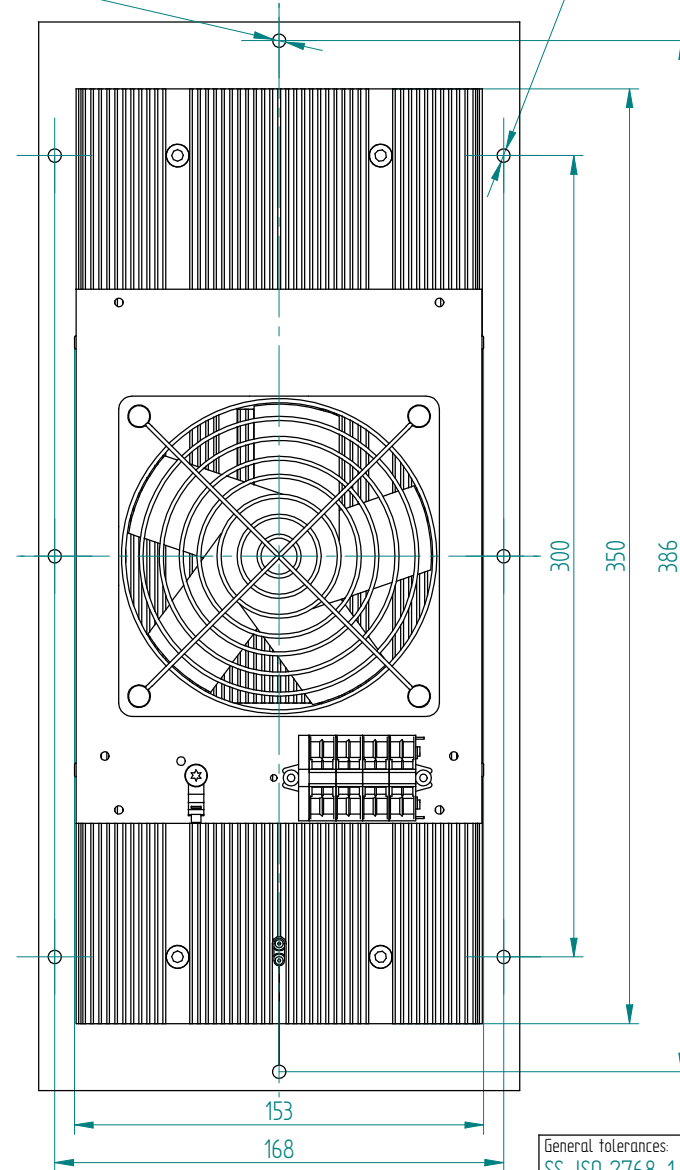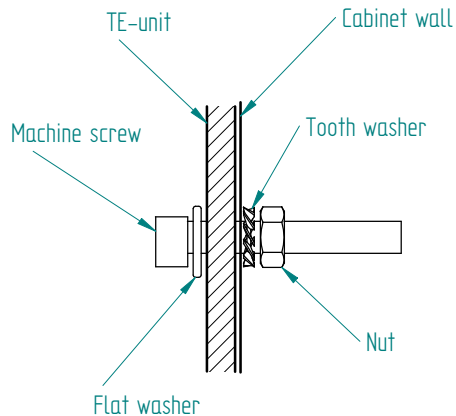

General tolerances: SS-ISO 2768-1 v	First angle projection: 	Dimension units: Metric: [mm]
--	-----------------------------	----------------------------------

Comment / Deviations: Warm side of unit designed to comply with IP54. Hi-Pot tested 750VDC.					
Designed by: A. Kim	Checked by: S. Winberg	Approved by: C. Johansson	Release date: 2011-10-18	Project: Standard	Customer:
Laird Technologies S-43153 Molndal, Sweden tfn +46 31 420530, fax +46 31 247909 e-mail: info@lairdtech.com Web: www.lairdtech.com			Title: TE ASSEMBLY AIR-AIR200, 24VDC		
Part nr: AA-200-24-24-00-10			Rev: 06	Version:	Scale: Size, sheet 1:2 A3, 3(4)