

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Preliminary Product Information

LTCC Multi Layer Ceramic Band Pass Filter- 1608 (0603) size

- RFBPF1608060K98Q1C Low Profile Design
- For 5 GHz ISM Band Application

FEATURES

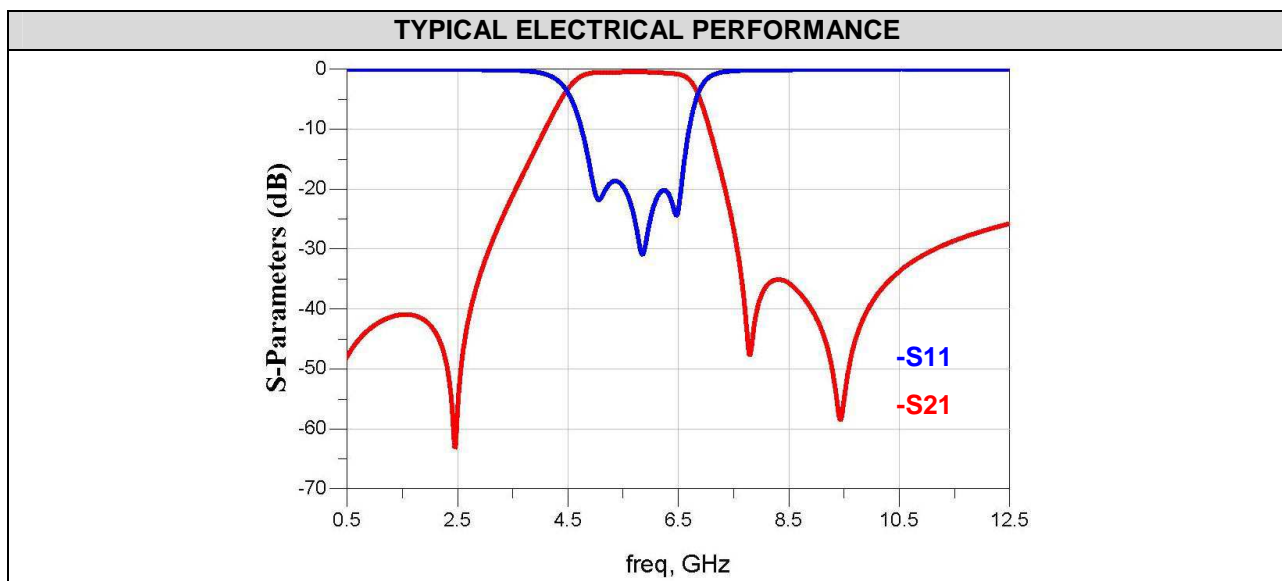
- Miniature footprint: 1.6X 0.8 X 0.6 mm³
- Low Insertion loss
- High attenuation on harmonic suppressed
- LTCC process

APPLICATIONS

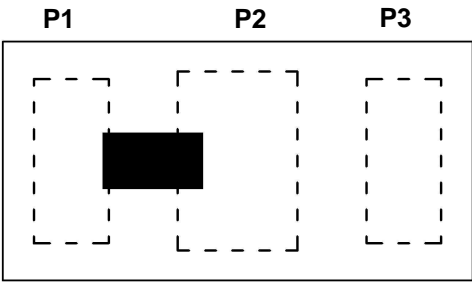
- 5150 - 5950 MHz band RF applications.

ELECTRICAL CHARACTERISTICS

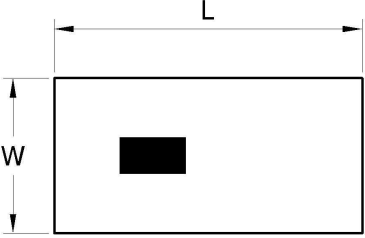

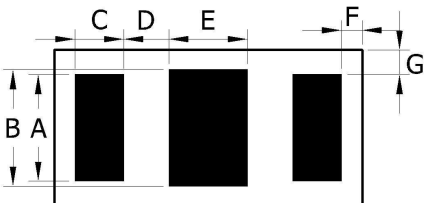
Item	Specification
Frequency range	5150 - 5950 MHz
Insertion Loss	0.6 dB Max.
Attenuation	40.0 dB min. @ 30 - 2700 MHz 12.0 dB min. @ 7250 - 7800 MHz 20.0 dB min. @ 10300 - 11700 MHz
VSWR	2.0 max.
Impedance	50 Ω
Operation Temperature Range	-40°C - +85°C
Taping Quantity : 4000pcs per 7" reel Operating Temperature Range : -40 - +85°C Storage Temperature Range : -10 - +40°C Humidity : 30 to 70% relative humidity Moisture sensitivity levels : MSL is LEVEL 1 (Refer to : IPC/JEDEC J-STD-020)	



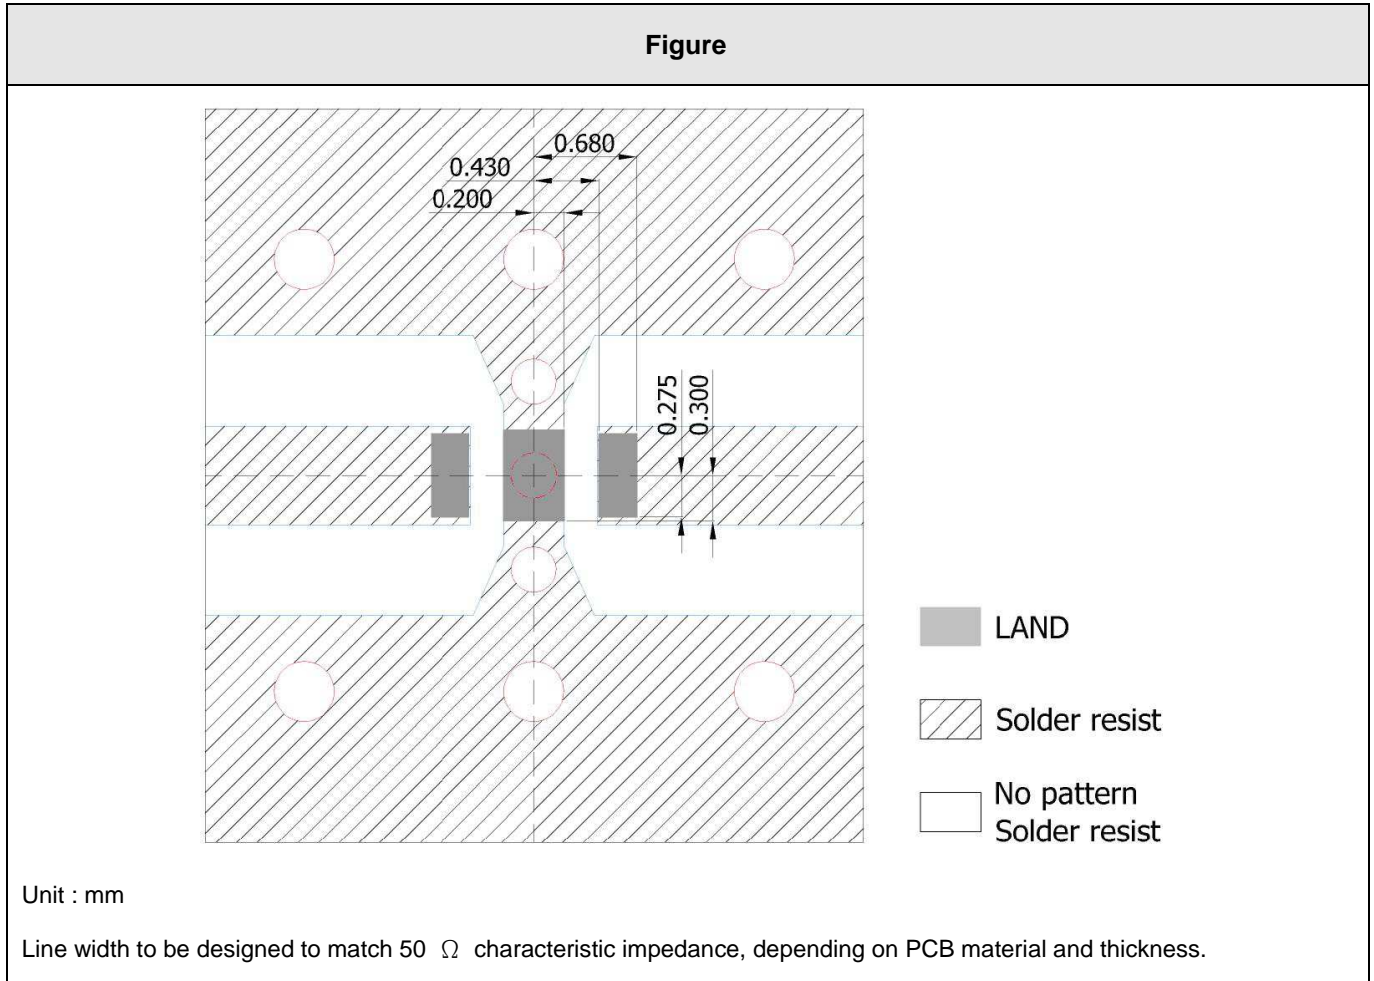
CONSTRUCTION

Figure	PIN	Connection
Top view 	1	Input Port
	2	GND
	3	output Port

DIMENSIONS

Figure	Symbol	Dimension (mm)
Top view  Side view  Bottom view 	L	1.60 ± 0.10
	W	0.80 ± 0.10
	T	0.60 max.
	A	0.55 ± 0.10
	B	0.60 ± 0.10
	C	0.25 ± 0.10
	D	0.23 ± 0.10
	E	0.40 ± 0.10
	F	0.12 ± 0.10
G	0.125 ± 0.10	

SOLDER LAND PATTERN



CONTACT INFORMATION

For more information, please contact with
[Walsin Technology Corporation](http://www.walsin.com).

Tel : 886-3-475-8711

Fax : 886-3-475-5197

E mail : info@passivecomponent.com

Web Site : <http://www.passivecomponent.com>

Specification subject to change without prior notice.