

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

TYPE 5CCD (5CCL)

For Reflow Soldering

Frequency Range: 0.1-2MHz

0.1-15MHz (High Frequency)

Inductance Range: 1-1400μH (1-700μH)


1-330μH (1-150μH) (High Frequency)

Temperature Coefficient: TC (L) 80±120ppm/°C (70±120ppm/°C)

140±120ppm/°C (120±120ppm/°C) (High Frequency)

TC (F) -40±120ppm/°C (-30±120ppm/°C)

-80±120ppm/°C (-60±120ppm/°C) (High Frequency)

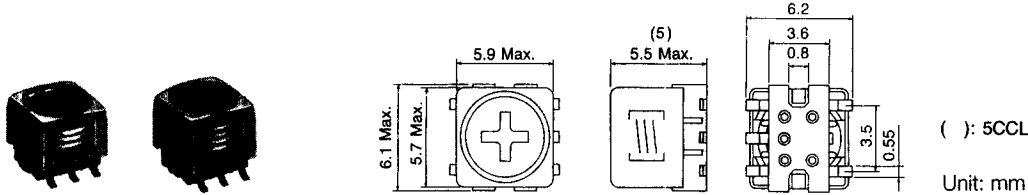

Features

- Low profile SMD for tight-spaced design.
- The 5CC series is intended for high stability applications.

STANDARD COILS SELECTION GUIDE

TYPE 5CCD	Inductance (μH)	Q (min)	Self Frequency (MHz)	Inductance Adjustable Range (μH)	Notes
01/BN-90680	1.8	40	7.96	1.8-3.6	High Frequency
02/BN-90681	2.0	45	7.96	2.0-4.0	High Frequency
03/BN-90682	2.2	45	7.96	2.2-4.4	High Frequency
04/BN-90683	2.4	50	7.96	2.4-4.8	High Frequency
05/BN-90684	2.7	50	7.96	2.7-5.4	High Frequency
06/BN-90685	3.0	50	7.96	3.0-6.0	High Frequency
07/BN-90686	3.3	55	7.96	3.3-6.6	High Frequency
08/BN-90687	3.6	55	7.96	3.6-7.2	High Frequency
09/BN-90688	3.9	55	7.96	3.9-7.8	High Frequency
10/BN-90689	4.2	55	7.96	4.2-8.4	High Frequency
11/BN-90690	4.5	55	7.96	4.5-9.0	High Frequency
12/BN-90691	4.8	55	7.96	4.8-9.6	High Frequency
13/BN-90692	5.1	55	7.96	5.1-10.2	High Frequency
14/BN-90693	5.4	55	7.96	5.4-10.8	High Frequency
15/BN-90694	5.7	55	7.96	5.7-11.4	High Frequency
16/BN-90695	6.0	55	7.96	6.0-12.0	High Frequency
17/BN-90696	6.2	55	7.96	6.2-12.4	High Frequency
18/BN-90697	6.4	55	7.96	6.4-12.8	High Frequency
19/BN-90698	6.6	55	7.96	6.6-13.2	High Frequency
20/BN-90699	6.8	55	7.96	6.8-13.6	High Frequency

continued on next page

continued from previous page

TYPE 5CCD (cont'd)

TOKO Part Number	Inductance (μH)	Q (min.)	Test Frequency (MHz)	Inductance Adjustable Range (%)	Notes
614BN-9075Z	7.5	65	7.96	±4	High Frequency
614BN-9082Z	8.2	65	7.96	±4	High Frequency
614BN-9091Z	9.1	65	7.96	±4	High Frequency
614BN-9100Z	10	45	2.52	±5	High Frequency
614BN-9110Z	11	45	2.52	±5	High Frequency
614BN-9120Z	12	45	2.52	±5	High Frequency
614BN-9130Z	13	45	2.52	±5	High Frequency
614BN-9150Z	15	45	2.52	±5	High Frequency
614BN-9160Z	16	45	2.52	±5	High Frequency
614BN-9180Z	18	45	2.52	±5	High Frequency
614BN-9200Z	20	45	2.52	±5	High Frequency
614BN-9220Z	22	45	2.52	±5	High Frequency
614BN-9240Z	24	45	2.52	±5	High Frequency
614BN-9270Z	27	45	2.52	±5	High Frequency
614BN-9300Z	30	45	2.52	±5	High Frequency
614BN-9330Z	33	45	2.52	±5	High Frequency
614BN-9360Z	36	45	2.52	±5	High Frequency
614BN-9390Z	39	45	2.52	±5	High Frequency
614BN-9430Z	43	45	2.52	±5	High Frequency
614BN-9470Z	47	45	2.52	±5	High Frequency
614BN-9510Z	51	45	2.52	±5	High Frequency
614BN-9560Z	56	45	2.52	±5	High Frequency
614BN-9620Z	62	45	2.52	±5	High Frequency
614AN-9680Z	*68	*30	2.52	±5	
614AN-9750Z	*75	*30	2.52	±5	
614AN-9820Z	*82	*30	2.52	±5	
614AN-9910Z	*91	*30	2.52	±5	
614AN-9101Z	100	45	0.796	±5	
614AN-9111Z	110	45	0.796	±5	
614AN-9121Z	120	45	0.796	±5	
614AN-9131Z	130	45	0.796	±5	
614AN-9151Z	150	45	0.796	±5	
614AN-9161Z	160	45	0.796	±5	
614AN-9181Z	180	45	0.796	±5	
614AN-9201Z	200	45	0.796	±5	
614AN-9221Z	220	45	0.796	±5	
614AN-9241Z	240	45	0.796	±5	
614AN-9271Z	270	45	0.796	±5	
614AN-9301Z	300	45	0.796	±5	
614AN-9331Z	330	45	0.796	±5	
614AN-9361Z	360	45	0.796	±5	
614AN-9391Z	390	45	0.796	±5	
614AN-9431Z	430	45	0.796	±5	
614AN-9471Z	470	45	0.796	±5	
614AN-9511Z	510	45	0.796	±5	
614AN-9561Z	560	45	0.796	±5	
614AN-9621Z	620	45	0.796	±5	
614AN-9681Z	680	45	0.796	±5	
614AN-9751Z	750	45	0.796	±5	
614AN-9821Z	820	45	0.796	±5	
614AN-9911Z	910	45	0.796	±5	
614AN-9102Z	1000	30	0.252	±5	
614AN-9112Z	1100	30	0.252	±5	
614AN-9122Z	1200	30	0.252	±5	
614AN-9132Z	1300	30	0.252	±5	

*Q measured at 450kHz.