

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .


Adjustable RF Inductors

Special Features

- High inductance
- Wide tuning range
- Cup core construction for low radiation
- Static shielding can with grounding taps
- Min. SRF measured at max. inductance
- Operating temperature -55 to +105°C

9050 Series								
Part Number	L (uH)		Q		Test Freq. (MHz)	SRF (MHz)	DCR (Ω)	I (mA)
	Min.	Max.	Min.	Max.				
9050	1.5	3	40	41	7.9	39	0.66	80
9051	3	7	46	45	7.9	23	0.85	125
9052	7	14	40	62	2.5	12	1.38	80
9053	14	28	48	66	2.5	7.2	2.1	80
9054	28	60	48	45	2.5	4.9	3	100
9055	60	120	40	69	0.79	3.6	4	100
9056	120	280	52	68	0.79	2.5	5.75	80
9057	280	650	52	62	0.79	1.7	12	80
9058	650	1300	36	68	0.25	1.2	15	100
9059	1300	3000	43	53	0.25	0.57	23	100
9059-1	1800	2200	116	129	0.25	1.04	10	141
9060	3000	10,000	32	32	0.079	0.48	76	30
9061	8000	20,000	35	38	0.079	0.33	110	30
9062	15,000	40,000	25	40	0.079	0.24	150	30
9063	20,000	60,000	36	60	0.079	0.09	175	25

Also available as RoHS compliant.

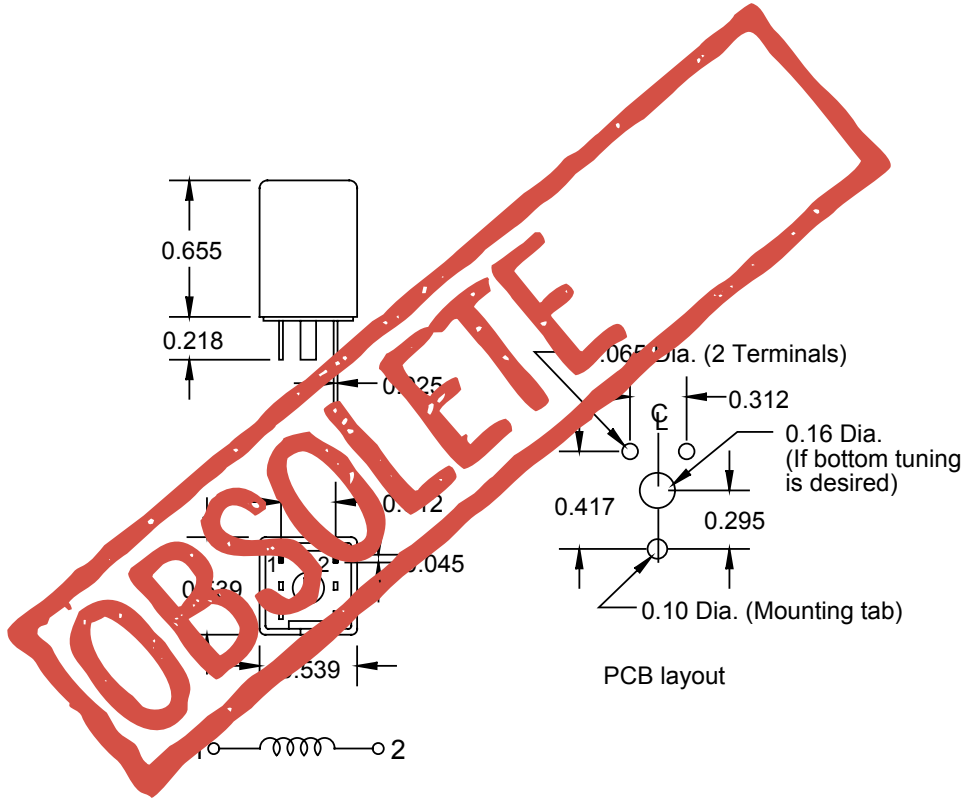

Dimensions: Inches

J.W. Miller
MAGNETICS

306 E. Alondra Blvd. Gardena, CA 90247-1059 • Phone (310) 515-1720 • FAX (310) 515-1962

www.jwmiller.com