

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

CP1W-ETN01-US

# CP1 Ethernet Adapter

## Low Cost Ethernet Adapter for CP1 Series Micro PLCs


The CP1W-ETN01-US is a low cost adapter that allows Ethernet communications to the CP1H and CP1L PLCs with an available option board slot. Easily connect the PLC to a NS HMI, Data Acquisition Software or CX-Programmer via Ethernet communications.

### Key Features and Benefits

- **Easy Mounting** – The adapter mounts in an unused Option Board Slot of the CP1 PLC
  - **Supports 2 connections** – The CP1W-ETN01-US has been designed to allow 2 simultaneous Ethernet connections. An HMI (NS, NSJ, Indusoft) as well as a CX Programmer can communicate to a CP1H or CP1L with the adapter.
  - **Remote Maintenance** – Perform remote maintenance via an Intranet or the Internet for remote diagnostics to maximize production up-time and reduce operating and maintenance costs.
  - **Data Acquisition** – Use Indusoft or CX-Supervisor to easily monitor, control & store production data, alarms, recipes, messages from the PLC for improving product quality.
  - **Intelligent Slave** – Each PLC is a powerful motion controller\* (CP1H - 4 Axis, CP1L – 2 Axis) with high speed interrupts, Real Time Clock, IEC61131-3 Programming, PID, Floating Point Math and is expandable with analog or digital I/O. The addition of an Ethernet option board turns the PLC into an Intelligent Slave.
- \*Transistor models




### Typical System Configuration

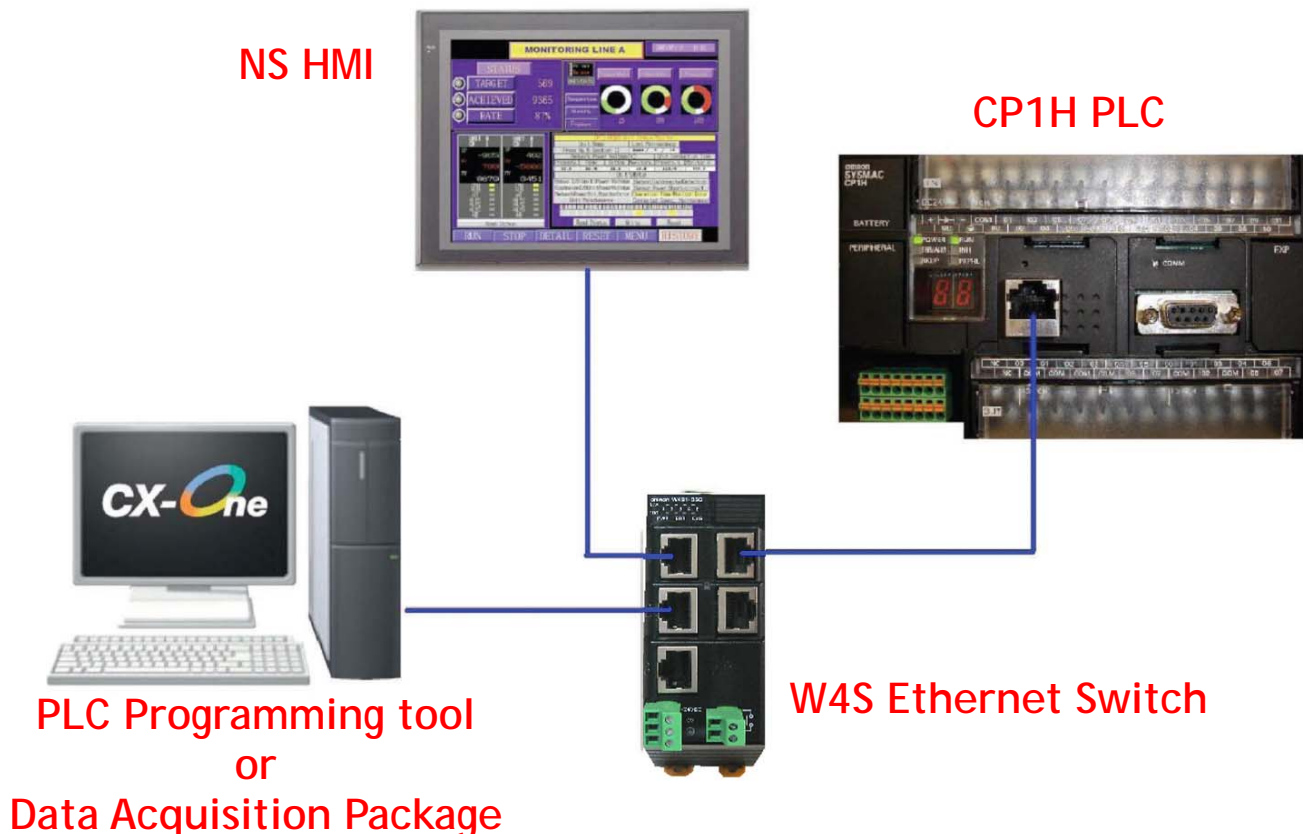

# Intelligent Ethernet Slave

Complete Pulse and Serial Functions for Servo and Inverter Applications and Applications Using HMI with Ethernet

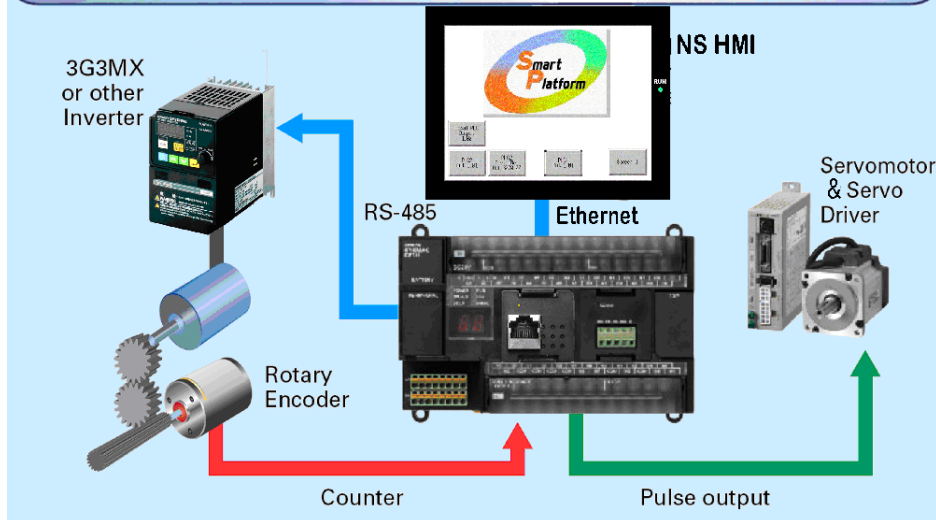

In the above example the CP1H PLC communicates to the NS HMI via Ethernet. The PLC can control 4 axis of servo motors while also reading 4 high speed encoder inputs. An additional option port can be added for communications to AC Drives, Temperature Controllers, or other devices. Built into the CPU are 24 Digital In, 16 Digital Out and 6 Analog I/O (4 configurable analog inputs & 2 configurable analog outputs). The PLC is expandable up to 320 digital I/O along with 2 CJ Special I/O modules (Analog, Motion, RFID, Network or Communication cards).

## Specification

Part Number	Description
CP1W-ETN01-US	CP1 Ethernet Adapter
Type	100Base-TX (Can be used as 10Base-T)
Applicable PLCs	CP1L-L14, CP1L-L20, CP1L-M30, CP1L-M40, CP1L-M60, CP1H
Transmission Distance	100 m (distance between hub and node)
Number of units mounted	Two (both option ports can be used) (One for CP1L-L14,CP1L-L20)
Communication Method	Omron FINS
Maximum connections per device	Two connections (ie: CX-Programmer and NS HMI)
Number of nodes on FINS network	Up to 252 nodes possible
FINS Frame Length	500 bytes max
Default IP Address	192.168.250.11
Web Page IP Address Set-up	<a href="http://192.168.250.11">http://192.168.250.11</a> (Default)

**Additional literature** can be obtained from [www.omron247.com](http://www.omron247.com).

- W450 - CP1H Operation Manual
- W451 - CP1L / CP1H Programming Manual
- W462 - CP1L Operation Manual
- W452 - NSJ Operation Manual
- W227 - W4S Ethernet Switch

# OMRON

OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS

Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON CANADA, INC. • HEAD OFFICE**

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE**

São Paulo, SP, Brasil • 55.11.2101.6300 • [www.omron.com.br](http://www.omron.com.br)

**OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE**

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ARGENTINA • SALES OFFICE**

Cono Sur • 54.11.4783.5300

**OMRON CHILE • SALES OFFICE**

Santiago • 56.9.9917.3920

**OTHER OMRON LATIN AMERICA SALES**

54.11.4783.5300