

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Uninterruptible power supply with IQ technology 1AC/1AC/500 VA. For 120 V AC/230 V AC applications. Provides information regarding the charging state, remaining runtime, and service life of your rechargeable battery module at all times and thereby increases system availability.

Why buy this product

- ✔ Easy handling thanks to automatic battery detection, tool-free battery replacement during operation, and communication via the IFS interface
- ✔ Reliable starting of difficult loads with the static POWER BOOST power reserve with up to 1.5 times the nominal current permanently
- ✔ Device suitable for universal use thanks to comprehensive license package and extensive parameterization and diagnostics options

Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 616 (IF-2011)
GTIN	 4 046356 560078
Custom tariff number	85044082
Country of origin	GERMANY

Technical data

Input data

Nominal input voltage	230 V AC
Nominal input voltage	120 V AC
AC input voltage range	180 V AC ... 264 V AC
AC input voltage range	80 V AC ... 150 V AC
AC input voltage range	80 V AC ... 264 V AC
AC frequency range	45 Hz ... 65 Hz
Buffer period	1 h (38 AH)
Permissible backup fuse	B16
Additional text	230 V AC
Power factor (cos phi)	0.8

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Technical data

Output data

Nominal output voltage	120 V AC
Nominal output voltage	230 V AC
Output voltage range	96 V AC ... 144 V AC
Output current	5.2 A (120 V AC, -25°C ... +40°C)
Output current	4.3 A (120 V AC, -25°C ... +50°C)
Output current	2.7 A (230 V AC, -25°C ... +40°C)
Output current	2.2 A (230 V AC, -25°C ... +40°C)
Derating	50 °C ... 70 °C (2.5%/K)
Connection in parallel	No
Connection in series	No

General data

Width	125 mm
Height	130 mm
Depth	125 mm
Net weight	2.2 kg
Efficiency	> 98 %
Efficiency	> 98 %
Efficiency	> 86 %
Degree of protection	IP20
Protection class	I
Ambient temperature (operation)	-40 °C ... 70 °C (> 50°C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (25°C, no condensation)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: 5 mm horizontally, 15 mm next to active components, 5 cm vertically
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Standard – Limitation of mains harmonic currents	EN 61000-3-2 (Klasse A)
UL approvals	UL/C-UL Recognized UL 1778

Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	10
Stripping length	7 mm
Screw thread	M4

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Technical data

Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	10
Stripping length	7 mm

Signaling

Signalization designation	AC mode of operation
Output name	Statusanzeige 120 V AC
Status display	LED
Note on status display	Static to
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M4
Signalization designation	AC mode of operation
Output name	Statusanzeige 230 V AC
Status display	LED
Note on status display	Static to
Signalization designation	Alarm
Output name	Transistor output, active
Maximum switching voltage	≤ 30 V DC
Output voltage	24 V (SELV)
Continuous load current	≤ 30 mA
Status display	LED
Note on status display	Static to
Signalization designation	Battery mode
Output name	Transistor output, active
Type of signaling	Yellow LED
Maximum switching voltage	≤ 30 V DC
Output voltage	24 V (SELV)
Continuous load current	≤ 30 mA
Status display	LED

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Technical data

Signaling

Note on status display	Static to
------------------------	-----------

Classifications

eclass

eCl@ss 4.1	27040603
eCl@ss 5.0	27040603
eCl@ss 5.1	27040603
eCl@ss 6.0	27040603

etim

ETIM 4.0	EC000382
----------	----------

unspsc

UNSPSC 6.01	30211510
UNSPSC 7.0901	39121011
UNSPSC 11	39121011
UNSPSC 12.01	39121011
UNSPSC 13.2	39121011

Approvals

Certificates

Certification

UL Recognized

Certification EX

Certification submitted

Approval details

UL Recognized

Accessories

Accessories

Software

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Accessories

Configuration software - UPS-CONF - 2320403



Configuration software for QUINT UPS can be downloaded free of charge.

Battery module - UPS-BAT/VRLA/24DC/ 3.4AH - 2320306



Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 3.4 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ

Battery module - UPS-BAT/VRLA/24DC/ 7.2AH - 2320319



Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 7.2 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ

Battery module - UPS-BAT/VRLA/24DC/12AH - 2320322



Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 12 Ah, tool-free battery replacement, automatic detection and communication with QUINT UPS-IQ

Battery module - UPS-BAT/VRLA/24DC/38AH - 2320335



Rechargeable battery module, lead AGM, VRLA technology, 24 V DC, 38 Ah, automatic detection and communication with the QUINT UPS-IQ

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Accessories

Battery module - UPS-BAT/LI-ION/24DC/120WH - 2320351



Rechargeable battery module, LI-ION technology, 24 V DC, 120 Wh, for ambient temperatures of -20°C ... +60°C, automatic detection and communication with QUINT UPS-IQ

USB cable - CABLE-USB/MINI-USB-3,0M - 2986135



USB connecting cable: USB plug type A to USB plug type Mini-B; length: 3 m

Data cable - IFS-MINI-DIN-DATACABLE - 2320487



Data cable for communication between higher level controllers and QUINT UPS-IQ uninterruptible power supply units.

Data cable - IFS-RS232-DATACABLE - 2320490



Data cable for communication between higher level controllers and QUINT UPS-IQ uninterruptible power supply units.

Data cable - IFS-USB-DATACABLE - 2320500



Used for communication between the UPS CONF configuration software and the QUINT UPS IQ and TRIO UPS uninterruptible power supply units.

Uninterruptible power supply - QUINT-UPS/1AC/1AC/500VA - 2320270

Accessories

Memory block - IFS-CONFSTICK - 2986122



Multi-functional memory block for the INTERFACE system for easy storage and backup of the configuration.


Assembly adapters - UWA 182/52 - 2938235



Universal wall adapter

Drawings

Block diagram

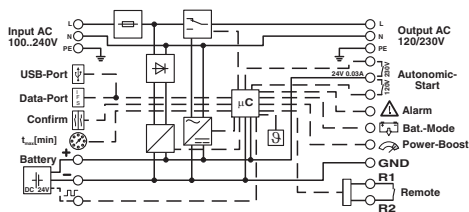

© Phoenix Contact 2012 - all rights reserved
<http://www.phoenixcontact.com>