

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Industrial Grade Secure Digital Cards

W7SDxxxx1XA-H60Px Series

**INFORMATION IN THIS DOCUMENT IS PROVIDED IN RELATION TO
WINTEC INDUSTRIES PRODUCTS, AND IS SUBJECT TO CHANGE
WITHOUT NOTICE.**

**NOTHING IN THIS DOCUMENT SHALL BE CONTRUED AS GRANTING
ANY LICENSE, EXPRESS OR IMPLIED.**

**ALL INFORMATION IN THIS DOCUMENT IS PROVIDED ON AN “AS-IS”
BASIS WITHOUT GUARANTEE OR WARRANTY OF ANY KIND.**

- Please contact your nearest Wintec representative for the latest updates or additional product information.

Revision History

Revision	Month	Year	History
1.0	January	2009	-Preliminary Release
1.1	February	2010	-Updated Ordering Guide

Secure Digital Card

W7SDxxxx1XA-H60Px ROHS Compliant

Features

GENERAL

- Density up to 8GB
- 32-bit RISC/DSP Controller
- Solid State Data Storage
- Dual 3.3V / 1.8V Interface
- Industry Standard Compatibility
- ROHS Compliant

PERFORMANCE

- High Performance 24 MB/s (Sustained Read)
- High Performance 23 MB/s (Sustained Write)
- Dual Channel operation
- Low Power Consumption

RELIABILITY

- > 2,000,000 Program/Erase Cycles
- Industrial Wear Leveling
 - Includes Static Block Management
- Spares & Bad Block Management
- On-chip ECC and CRC16 unit for flash data protection
- Hardware support for CPRM

COMPATIBILITY

- SD standard, rev. 1.01 / 1.10 / 2.0

Description

The Wintec Industries W7SDxxxx1XA-H60Px series of ROHS Compliant Secure Digital Cards are constructed with Samsung NAND-type single-level-cell (SLC) flash memory devices paired to a powerful 32-bit RISC/DSP-based system controller for virtual-to-physical address mapping and other flash management functions.

Wintec Secure Digital Cards employ a variety of sophisticated error checking and flash management utilities allowing for maximum levels of data reliability and card endurance. Patented wear-leveling methods ensure even wear of flash blocks across the entire card capacity. Background operations track erase counts, prioritize new writes to blocks with lower wear, and relocate static data to blocks with higher wear. Bad-block Management routines replace worn



Wintec Secure Digital Card

blocks with spare blocks reserved by the controller on card initialization. Reed-Solomon based ECC algorithms capable of correcting 4 bytes in a 512 byte sector are implemented on the fly without performance degradation to ensure data reliability through user data transfers and background wear-leveling operations. Additional information regarding the specifics of wear leveling, ECC methods, and application-specific card life calculations are available upon request and under NDA.

1.0 General Product Specification

For all the following specifications, values are defined at ambient temperature and nominal supply voltage unless otherwise stated.

Table 1: Performance Specifications

Parameter		Spec
Burst Transfer Rate To/From Host: Read		24 MB/s
Write		23 MB/s
Burst Transfer Rate To/From Flash		40.0 MB/s per channel
Active-to-Sleep Delay after processing the last command		0 s
Startup Times	Sleep-to-Write (Max.)	No Delay
	Sleep-to-Read (Max.)	No Delay
	Reset-to-Ready (Typical)	100.0 ms
	Reset-to-Ready (Max.)	500.0 ms

Table 2: Card Endurance

Parameter	Spec
Program/Erase Cycles	> 2,000,000 Cycles
Read Cycles	Unlimited
Data Retention	10 Years (Min.)

Table 3: Card Data Reliability

Parameter	Spec
Non-Recoverable Errors	< 1 in 10 ²⁰ Bytes Read
Erroneous Correction	< 1 in 10 ²⁰ Bytes Read
ECC Correctability	4 Random Bytes/Sector

Table 4: Environmental Specifications

Parameters	Operating	Non-Operating
Temperature (Commercial Temp)	0°C to 70°C	-40°C to 125°C
Temperature (Extended Temp)	-25°C to 85°C	-40°C to 125°C
Relative Humidity	25% to 95% (Non-Condensing)	40% to 93% (Non-Condensing)
Vibration	15 G rms	15 G rms
Altitude	80,000 ft. (Max.)	N/A
Shock	1,000 G (Max.)	1,000 G (Max.)
Acoustic	0 db	N/A

NOTE:

1. Input voltage 3.3V (±5%) or 1.8V (±10%) with a maximum ripple of 100mV peak-to-peak.
2. All values listed are at 25°C and nominal supply voltage.
3. Stated figures are based on primary configurations and may vary as larger density component NAND flashes are released.

2.0 Architecture

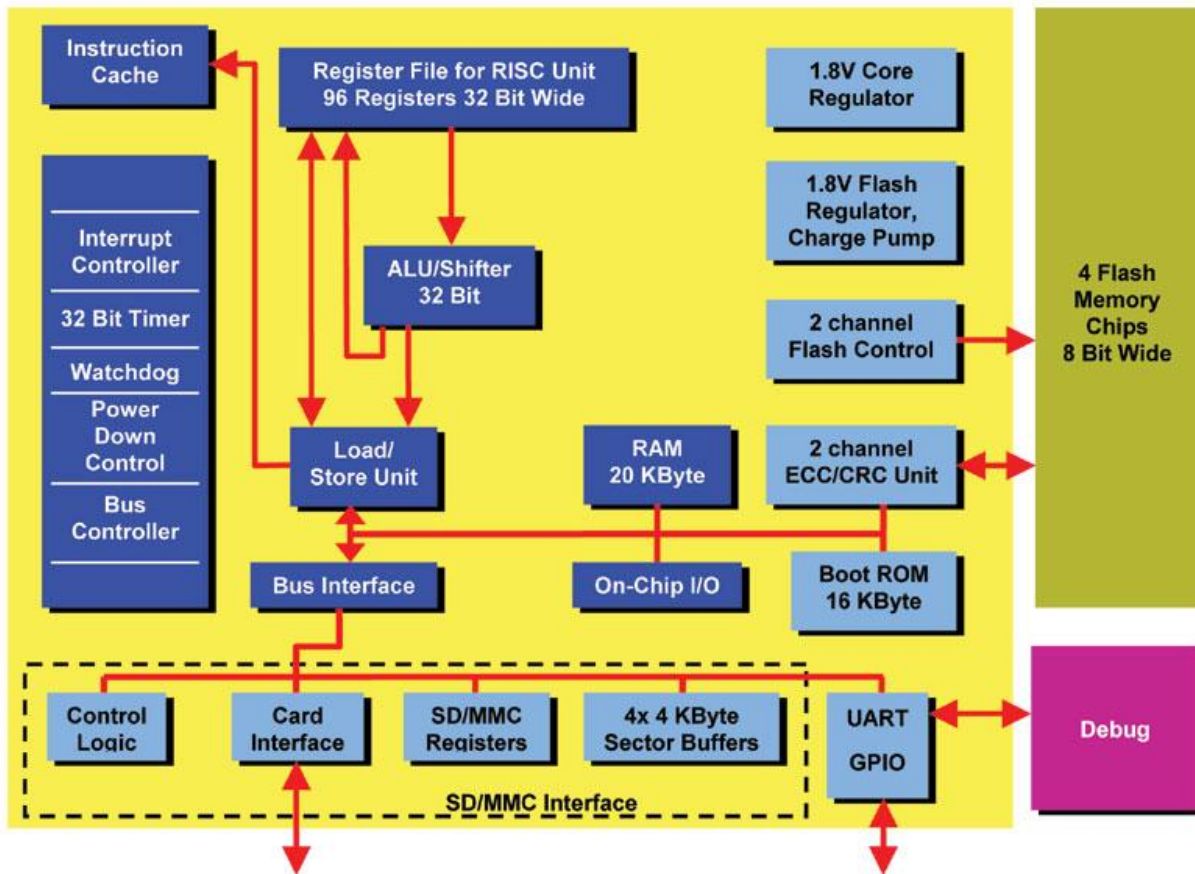


Figure 1: Card Block Diagram

Table 5: Card Pin Assignment

PIN NO	NAME	TYPE	DESCRIPTION
1	CD/DAT	I/O/PP3	Card Detect/Data Line [Bit3]
2	CMD	PP	Command / Response
3	VSS1	S	Supply voltage ground
4	VDD	S	Supply voltage
5	CLK	I	Clock
6	VSS2	S	Supply voltage ground
7	DAT0	I/O/PP	Data Line [Bit0]
8	DAT1	I/O/PP	Data Line [Bit1]
9	DAT2	I/O/PP	Data Line [Bit2]

- 1) S : power supply ; I : input ; O : output ; PP : push-pull ; OD : open-drain NC : Not connected (or logical high)
2) The DAT line for read - when card is in output mode only

3.0 Ordering Information

Table 6: Product Availability List & Naming

Card Capacity	Part Number
128 MB	W7SD128M1XA(I)-H60PC-002.01
256 MB	W7SD256M1XA(I)-H60PB-002.01
512 MB	W7SD512M1XA(I)-H60PB-002.01
1 GB	W7SD001G1XA(I)-H60PB-002.01
2 GB	W7SD002G1XA(I)-H60PB-02D.01
4 GB	W7SD004GHXA(I)-H60PB-2Q2.01
8 GB	W7SD008GHXA(I)-H60PB-2Q2.01

Contact Us (US & Int'l)

Wintec Industries OEM Sales
675 Sycamore Drive,
Milpitas, CA 95035
Ph: 408-856-0500
Fx: 408-856-0518

oemsales@wintecind.com
<http://www.wintecind.com/oem>

About Wintec Industries, Inc.

Wintec, founded in 1988, is headquartered in Milpitas, California. Wintec, a leading third party memory module manufacturer, specializes in a variety of module design and manufacturing, such as memory module, flash module, Handspring module, modem module, game module, etc. Besides a complete line of DDR, SDR, and EDO/FPM legacy memory modules, Wintec also distribute CPU, motherboard, peripherals, PC software, and consumer Flash products (such as MMC, SD, SMC, CompactFlash, PC Card, etc.). With excellent design engineering and manufacturing capability, Wintec provides a wide range of design and manufacturing services for our valuable customers from concept design to final product delivery. Wintec is ISO9001-2000 certified.

Important Notice

Wintec Industries, Inc. makes no representations or warranties with respect to the contents of this User Guide and specifically disclaims any implied warranties of any product design for any particular purpose. Wintec Industries, Inc. reserves the rights to revise this publication and to make changes from time to time in the content hereof without obligation of Wintec Industries, Inc. to notify any person or organization of such revisions or changes.