

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



# ATP Embedded Modules M.2

Targeted Product Portfolio, Engineered Specifically for Enterprise & Telecom Applications

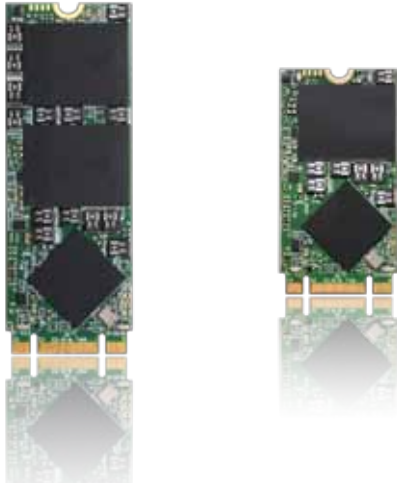

The ATP M.2 2242/2260 Embedded SSD is the Next Generation Form Factor (NGFF) storage solution. It provides outstanding performance and proven reliability for product operation, which is perfect for networking and thin clients, also suit for enterprise storage systems with high data security, and consistent data integrity requirement such as POS, industrial computers, data center applications.

## Key Features

- Enhanced endurance with Advanced Wear Leveling algorithm
- Built-in hardware-based data protection technology during power failure - PowerProtector
- Supports S.M.A.R.T. ATA feature set
- RoHS compliant and CE/FCC certification
- AES encryption(optional)

## Applications

- Networking
- Thin clients
- Enterprise storage systems



## Specifications

Product Name	M.2			
	2260 D2-B-M		2242 D2-B-M	
Flash Type	SLC	MLC	SLC	MLC
Density	32GB to 128GB	64GB to 256GB	8GB to 64GB	8GB to 128GB
Performance	Sequential Read up to 530 MB/s	Sequential Read up to 530 MB/s	Sequential Read up to 530 MB/s	Sequential Read up to 530 MB/s
	Sequential Write up to 390 MB/s	Sequential Write up to 300 MB/s	Sequential Write up to 400 MB/s	Sequential Write up to 155 MB/s
	Random Read IOPS up to 9,000	Random Read IOPS up to 7,000	Random Read IOPS up to 9,000	Random Read IOPS up to 7,000
Interface	SATA III 6 Gb/s			
Operating Temperature	-40°C to +85°C	0°C to 70°C	-40°C to +85°C	0°C to 70°C
Reliability	Advanced Wear Leveling , AutoRefresh			
	TBW** (max.) : 2,560 TB	TBW** (max.) : 153.6 TB	TBW** (max.) : 1,280 TB	TBW** (max.) : 76.8 TB
	MTBF @ 25°C: >2,000,000 hours			
Dimensions: LxWxH (mm)	60.0 X 22.0 X 3.5		42.0 X 22.0 X 3.5	

\*\* All TBW data listed are under highest random write value in each product line. The TBW data are subject to change by density, configuration and customers' applications.

## Ordering Information

Density	2260 D2-B-M		2242 D2-B-M	
	SLC	MLC	SLC	MLC
8GB	-	-	AF8GSSIA-VAAXP	AF8GSMIA-VAAXP
16GB	-	-	AF16GSSIA-VAAXP	AF16GSMIA-VAAXP
32GB	AF32GSSIB-VAAXP	-	AF32GSSIA-VAAXP	AF32GSMIA-VAAXP
64GB	AF64GSSIB-VAAXP	AF64GSMIB-VAAXP	AF64GSSIA-VAAXP	AF64GSMIA-VAAXP
128GB	AF128GSSIB-VAAXP	AF128GSMIB-VAAXP	-	AF128GSMIA-VAAXP
256GB	-	AF256GSMIB-VAAXP	-	-

### ATP TAIWAN(HQ)

TEL: +886-2-2659-6368  
FAX: +886-2-2659-4982  
sales-apac@atpinc.com

### ATP USA

TEL: +1-408-732-5000  
FAX: +1-408-732-5055  
sales@atpinc.com

### ATP EUROPE

TEL: +49-89-374-9999-0  
FAX: +49-89-374-9999-29  
sales-europe@atpinc.com

### ATP JAPAN

TEL: +81-3-6206-8097  
FAX: +81-3-6206-8098  
sales-japan@atpinc.com

### ATP CHINA

TEL: +86-21-5080-2220  
FAX: +86-21-5080-2219  
sales@cn.atpinc.com

