


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



LITEON

0.56" Seven-Segment Numeric LED Display

LTS-5x01A/5x03A

LTD-5x21A/5x23A Series

LTC-5653x-01/5753x-01

Features

- 0.56 inch (14.22mm) digit height
- Continuous uniform segments.
- Low power requirement.
- Excellent characters appearance.
- High brightness & high contrast.
- Wide viewing angle.
- Solid state reliability.
- Categorized for luminous intensity.
- I.C. compatible.
- Easy mounting on P.C. board or socket.

Description


The LTS-5000A/LTD-5000A/LTC-5x53x-01 is a 0.56 inch (14.22mm) height 7-Segment single, dual and quadruple displays. AlGaAs red displays have gray face and white segments. The LTS-5000A/LTD-5000A bright red, yellow and red orange displays have gray face and white segments, and green displays have gray face and green segments. The LTC-5x53x-01 displays have gray face and white segments.

The AlGaAs red 7-segment displays are designed for applications requiring low power consumption. They are tested and selected for the excellent low current characteristics to ensure that the segments are matched at low current. Drive current as low as 1 mA per segment is available.


The AlGaAs red series devices utilize LED chips which are made from AlGaAs on a non-transparent GaAs substrate. The bright red and green series devices utilize LED chips which are made from GaP on a transparent GaP substrate. The yellow and red orange series devices utilize LED chips which are made from GaAsP on a transparent GaP substrate.


Package Dimensions

A. LTS-5X01A/5X03A

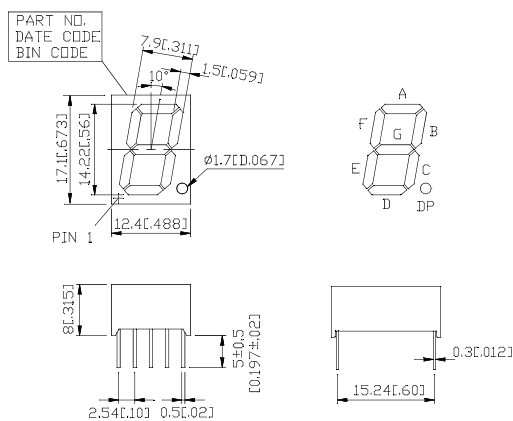


B. LTD-5X21A/5X23A

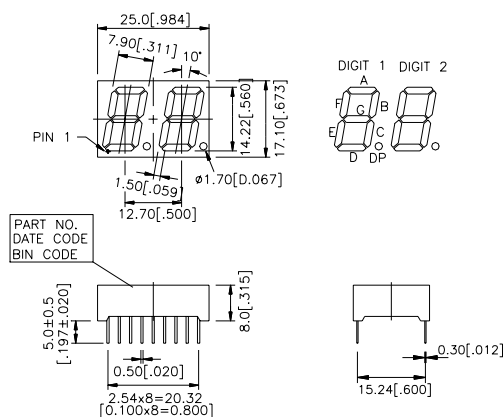



C.LTC-5653/5753

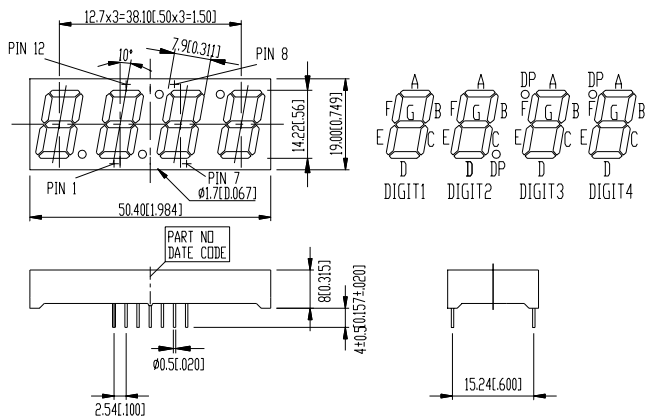

Notes: All dimensions are in millimeters (inches).

Tolerance: ± 0.25mm (0.01") unless otherwise noted.

DISPLAYS

Devices

| Part No. | | | | | Description | Package Dimension | Internal Circuit Diagram |
|-------------|------------|--------|--------|------------|----------------------------------|-------------------|--------------------------|
| AlGaAs Red | Bright Red | Green | Yellow | Red Orange | | | |
| LTS-5001AWC | 5301AP | 5601AG | 5701AY | 5501AE | Common Anode, Rt. Hand Decimal | A | A |
| LTS-5003AWC | 5303AP | 5603AG | 5703AY | 5503AE | Common Cathode, Rt. Hand Decimal | A | B |
| LTD-5021AWC | 5321AP | 5621AG | 5721AY | 5521AE | Common Anode, Rt. Hand Decimal | B | C |
| LTD-5023AWC | 5323AP | 5623AG | 5723AY | 5523AE | Common Cathode, Rt. Hand Decimal | B | D |

| Part No. LTC- | | | | | Description | Package Dimension | Internal Circuit Diagram |
|---------------|------------|----------|----------|------------|--------------------------|-------------------|--------------------------|
| AlGaAs Red | Bright Red | Green | Yellow | Red Orange | | | |
| LTC-5653WC-01 | 5653P-01 | 5653G-01 | 5653Y-01 | 5653E-01 | Common Anode Multiplex | C | E |
| LTC-5753WC-01 | 5753P-01 | 5753G-01 | 5753Y-01 | 5753E-01 | Common Cathode Multiplex | C | F |

Pin Connection


| Pin No. | Connection | | | |
|---------|-----------------|-------------------|-------------------------|--------------------------|
| | A.LTS-5X01A | B.LTS-5X03A | C.LTD-5X21A | D.LTD-5X23A |
| 1. | Cathode E | Anode E | Cathode E (Digit 1) | Anode E (Digit 1) |
| 2. | Cathode D | Anode D | Cathode D (Digit 1) | Anode D (Digit 1) |
| 3. | Common Anode *1 | Common Cathode *1 | Cathode C (Digit 1) | Anode C (Digit 1) |
| 4. | Cathode C | Anode C | Cathode D.P. (Digit 1) | Anode D.P. (Digit 1) |
| 5. | Cathode D.P. | Anode D.P. | Cathode E (Digit 2) | Anode E (Digit 2) |
| 6. | Cathode B | Anode B | Cathode D (Digit 2) | Anode D (Digit 2) |
| 7. | Cathode A | Anode A | Cathode G (Digit 2) | Anode G (Digit 2) |
| 8. | Common Anode *1 | Common Cathode *1 | Cathode C (Digit 2) | Anode C (Digit 2) |
| 9. | Cathode F | Anode F | Cathode D.P. (Digit 2) | Anode D.P. (Digit 2) |
| 10. | Cathode G | Anode G | Cathode B (Digit 2) | Anode B (Digit 2) |
| 11. | - | - | Cathode A (Digit 2) | Anode A (Digit 2) |
| 12. | - | - | Cathode F (Digit 2) | Anode F (Digit 2) |
| 13. | - | - | Cathode Anode (Digit 2) | Common Cathode (Digit 2) |
| 14. | - | - | Cathode Anode (Digit 1) | Common Cathode (Digit 1) |
| 15. | - | - | Cathode B (Digit 1) | Anode B (Digit 1) |
| 16. | - | - | Cathode A (Digit 1) | Anode A (Digit 1) |
| 17. | - | - | Cathode G (Digit 1) | Anode G (Digit 1) |
| 18. | - | - | Cathode F (Digit 1) | Anode F (Digit 1) |

9-153


| Pin No. | Connection | |
|---------|------------------------|--------------------------|
| | E.LTC-5653X-01 | F.LTC-5753X-01 |
| 1. | Cathode E | Anode E |
| 2. | Cathode D | Anode D |
| 3. | Cathode D.P. | Anode D.P. |
| 4. | Cathode C | Anode C |
| 5. | Cathode G | Anode G |
| 6. | Common Anode (Digit 4) | Common Cathode (Digit 4) |
| 7. | Cathode B | Anode B |
| 8. | Common Anode (Digit 3) | Common Cathode (Digit 3) |
| 9. | Common Anode (Digit 2) | Common Cathode (Digit 2) |
| 10. | Cathode F | Anode F |
| 11. | Cathode A | Anode A |
| 12. | Common Anode (Digit 1) | Common Cathode (Digit 1) |

Internal Circuit Diagrams


A.LTS-5X01A

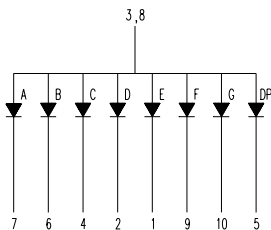


B.LTS-5X03A

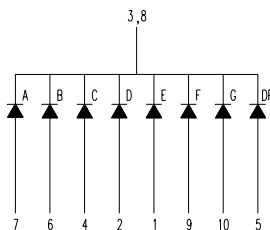


C.LTD-5X21A

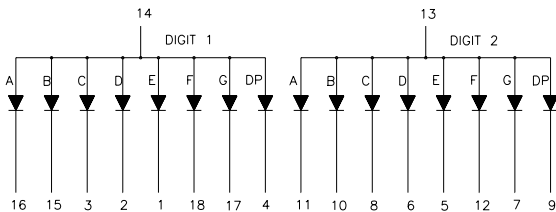


D.LTD-5X23A

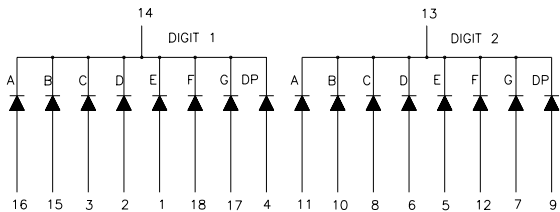

E.LTC-5653X-01

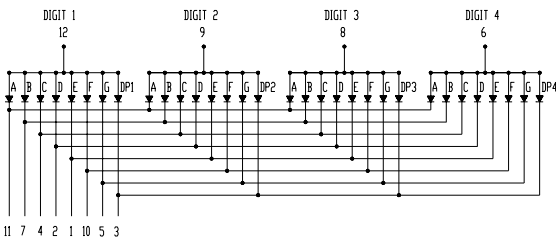


F.LTC-5753X-01

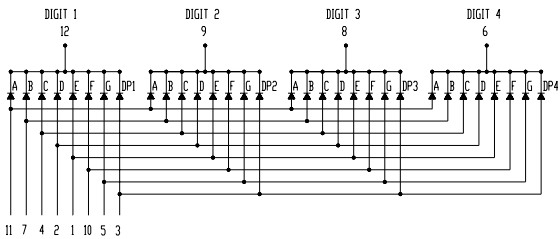

Absolute Maximum Rating at Ta=25°C

| Parameter | AlGaAs Red | Bright Red | Green | Yellow | Red Orange | Unit |
|--|----------------|------------|-------|--------|------------|-------|
| Power Dissipation Per Segment | 75 | 40 | 75 | 60 | 75 | mW |
| Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width) | 125 | 60 | 100 | 80 | 100 | mA |
| Continuous Forward Current Per Segment | 30 | 15 | 25 | 20 | 25 | mA |
| Derating Linear from 25°C Per Segment | 0.4 | 0.2 | 0.33 | 0.27 | 0.33 | mA/°C |
| Reverse Voltage Per Segment | 5 | 5 | 5 | 5 | 5 | V |
| Operating Temperature Range | -35°C to +85°C | | | | | |
| Storage Temperature Range | -35°C to +85°C | | | | | |
| Solder Temperature 1/16 Inch Below Seating Plane for 3 Seconds at 260°C | | | | | | |

**Electrical/Optical Characteristics at Ta=25°C**

LTS-5001AWC/5003AWC/LTD-5021AWC/5023AWC/LTC-5653AWC/5753AWC

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Tset Condition |
|-----------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity | I _v | 320 | 700 | | μ cd | I _F =1mA |
| | | | 3750 | | | I _F =5mA |
| Peak Emission Wavelength | λ _P | | 660 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 35 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 638 | | nm | I _F =20mA |
| Forward Voltage, Per Segment | V _F | | 1.6 | 2.4 | V | I _F =1mA |
| | | | 1.7 | | | I _F =5mA |
| | | | 1.8 | | | I _F =20mA |
| Reverse Current, Per Segment | I _R | | | 100 | μ A | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _F =1mA |

LTS-5301AP/5303AP/LTD-5321AP/5323AP/LTC-5653P-01/5753P-01


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Tset Condition |
|--------------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity | I _v | 320 | 950 | | μ cd | I _F =10mA |
| Peak Emission Wavelength | λ _P | | 697 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 90 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 657 | | nm | I _F =20mA |
| Forward Voltage, Per Segment or D.P. | V _F | | 2.1 | 2.6 | V | I _F =20mA |
| Reverse Current, Per Segment or D.P. | I _R | | | 100 | μ A | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _F =10mA |

LTS-5601AG/5603AG/LTD-5621AG/5623AG/LTC-5653G-01/5753G-01

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Tset Condition |
|--------------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity | I _v | 800 | 2400 | | μ cd | I _F =10mA |
| Peak Emission Wavelength | λ _P | | 565 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 30 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 569 | | nm | I _F =20mA |
| Forward Voltage, Per Segment or D.P. | V _F | | 2.1 | 2.6 | V | I _F =20mA |
| Reverse Current, Per Segment or D.P. | I _R | | | 100 | μ A | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _F =10mA |

LTS-5501AE/5503AE/LTD-5521AE/5523AE/LTC-5653E-01/5753E-01

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Tset Condition |
|--------------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity | I _v | 800 | 2400 | | μ cd | I _F =10mA |
| Peak Emission Wavelength | λ _P | | 630 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 40 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 621 | | nm | I _F =20mA |
| Forward Voltage, Per Segment or D.P. | V _F | | 2.0 | 2.6 | V | I _F =20mA |
| Reverse Current, Per Segment or D.P. | I _R | | | 100 | μ A | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _F =10mA |



LTS-5701AY/5703AY/LTD-5721AY/5723AY/LTC-5653Y-01/5753Y-01

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Tset Condition |
|--------------------------------------|-----------------|------|------|------|----------|-------------------|
| Average Luminous Intensity | I_v | 800 | 2400 | | μ cd | $I_F=10\text{mA}$ |
| Peak Emission Wavelength | λ_P | | 585 | | nm | $I_F=20\text{mA}$ |
| Spectral Line Half-Width | $\Delta\lambda$ | | 35 | | nm | $I_F=20\text{mA}$ |
| Dominant Wavelength | λ_d | | 588 | | nm | $I_F=20\text{mA}$ |
| Forward Voltage, Per Segment or D.P. | V_F | | 2.1 | 2.6 | V | $I_F=20\text{mA}$ |
| Reverse Current, Per Segment or D.P. | I_R | | | 100 | μ A | $V_R=5\text{V}$ |
| Luminous Intensity Matching Ratio | $I_v\text{-m}$ | | | 2:1 | | $I_F=10\text{mA}$ |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

Typical Electrical/Optical Characteristic Curves (25°C Ambient Temperature Unless Otherwise Noted)

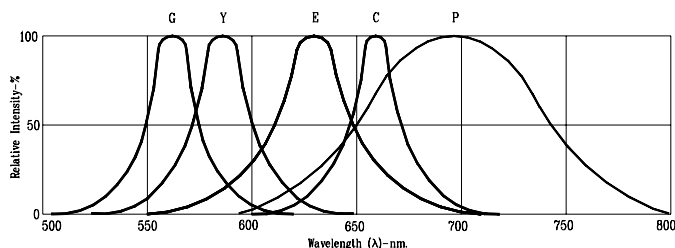


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig3. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig4. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT




Fig5. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig6. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig7. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT




Fig8. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.




Fig9. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)




Fig10. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)