

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Item No. **AH1018BB**

DS26431

Rev.	Spec. No.	Date(M-D-Y)
0	P-R	Dec-03-08
1	T-R	Sep-21-11

1. Ratings

Parameter	Symbol	MIN	TYP	MAX	Unit
Operating Temperature	To	-40	—	+85	°C
Storage Temperature	Ts	-50	—	+85	°C
Filament Voltage	Ef #1	4.2	4.7	5.2	Vac
Grid Voltage	ec #2	—	26.0	31.0	Vp-p
Anode Voltage	eb #2	—	26.0	31.0	Vp-p
Color of illumination	Green (G)				

2. Electrical Characteristics


Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Filament Current	If	Ef= 4.7 Vac #1 ec=eb= 0 V	33.0	37.0	41.0	mAac
Grid Current	ic #3	Ef= 4.7 Vac #1 ec= 26.0 Vp-p #2 eb= 26.0 Vp-p #2	—	2.5	5.0	mA <sub>p-p</sub>
Anode Current	ib #3	Ef= 4.7 Vac #1 ec= 26.0 Vp-p #2 eb= 26.0 Vp-p #2	—	2.5	5.0	mA <sub>p-p</sub>
Luminance	L	Ef= 4.7 Vac #1 ec= 26.0 Vp-p #2 eb= 26.0 Vp-p #2	350 (100)	— —	—	cd/m <sup>2</sup> (fL)
Grid Cut-Off Voltage	Ecco #4	Ef= 4.7 Vac #1 Eb= 26.0 Vdc	-5.0	—	—	Vdc
Anode Cut-Off Voltage	Ebco #4	Ef= 4.7 Vac #1 ec= 26.0 Vp-p #2	-5.0	—	—	Vdc




#1 Effective value of AC 50Hz or 60Hz.

#2 Pulse condition Duty cycle ( Du ) = 1/12 (tp/T)  
Pulse width ( tp ) = 100 μ sec.

#3 Unless specified, ic and ib are measured per grid,  
when all anodes are turned on.

#4 Ecco and Ebco are applied to the center-tap  
of the filament transformer.

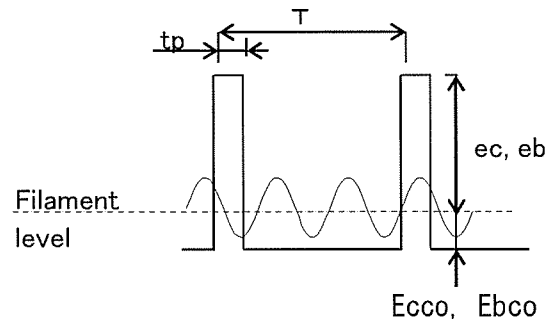


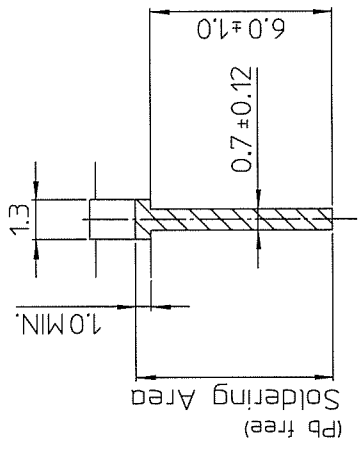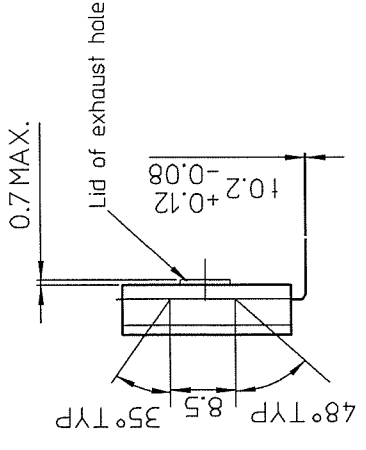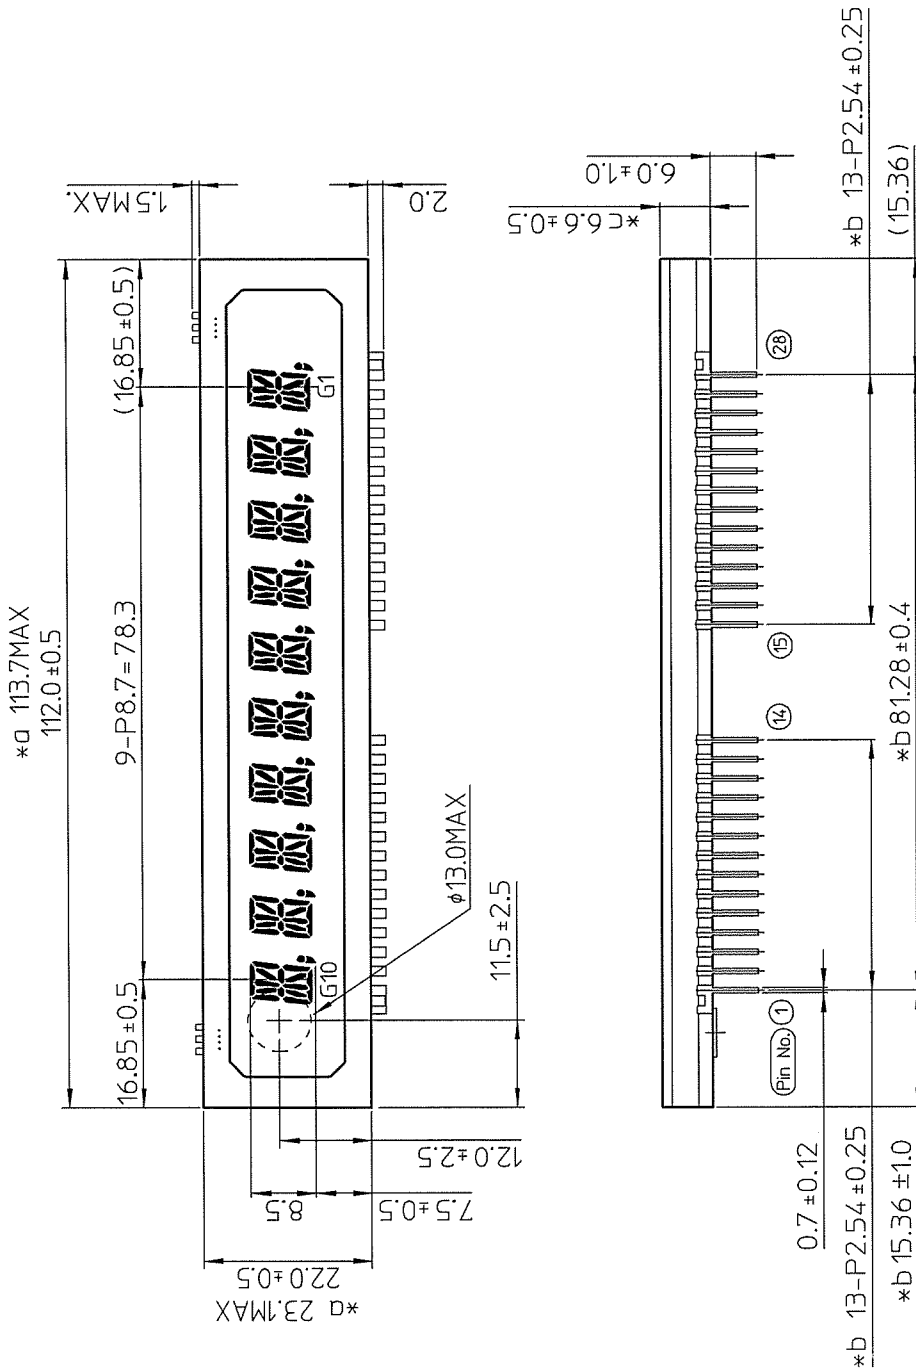

LEAD DETAIL

- \*a フリットのみ出しを含む寸法とする。  
Included extra frit glass.
- \*b 基板底面より3mmの位置の寸法とする。  
Within 3 mm from bottom of the glass substrate.
- \*c 排気孔栓の厚み含まない。  
This size does not include the thickness of a lid.

Scale 15:1  
Unit: mm

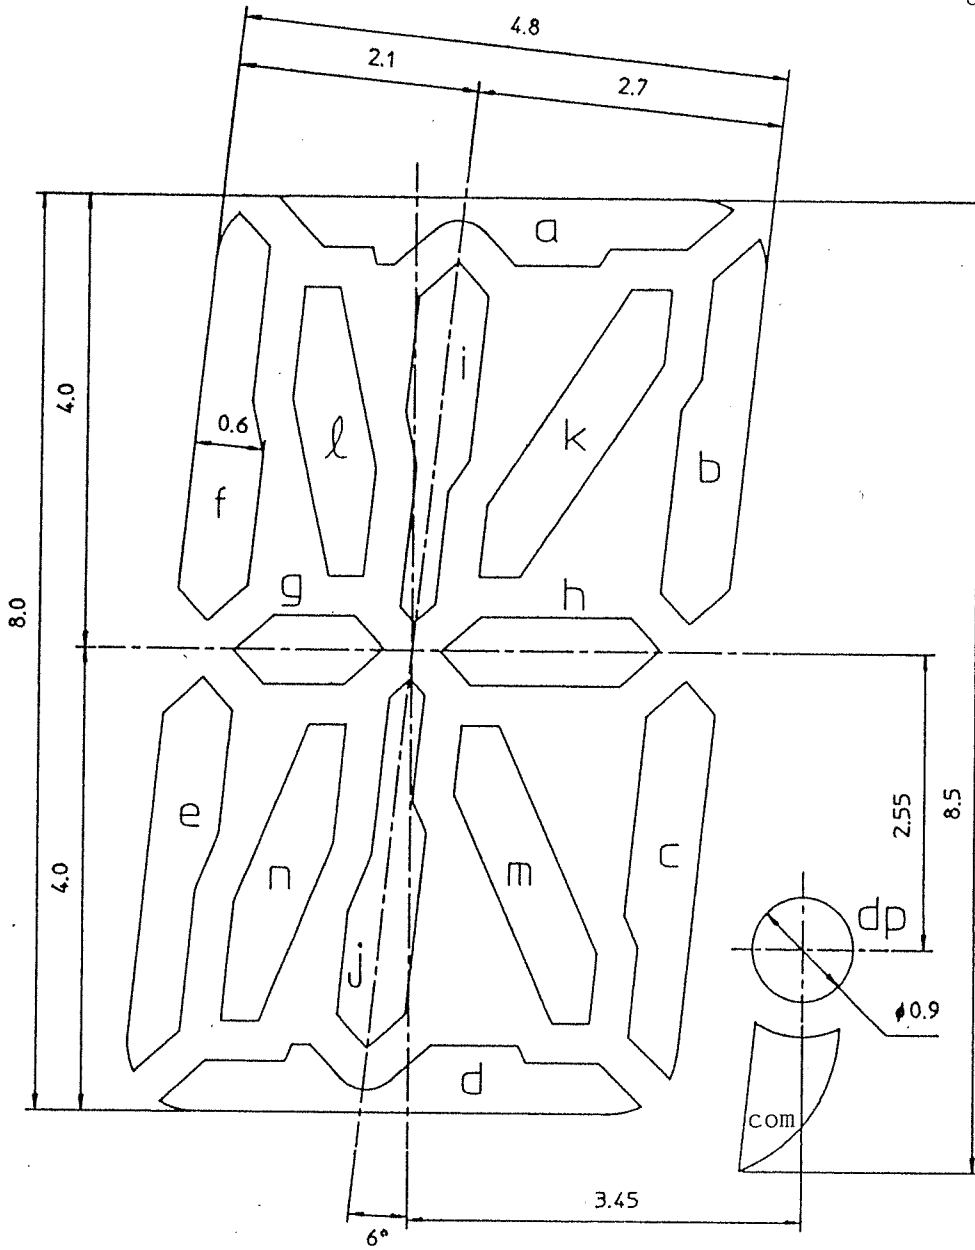

Pin Assignment

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Assignment	F	Pk	Pi	Pl	Pn	Pm	Pj	Pc	Pd	G10	G9	G8	G7	G6
Pin No.	15	16	17	18	19	20	21	22	23	24	25	26	27	28
Assignment	G5	G4	G3	G2	G1	Pcom	Pdp	Pe	Ph	Pg	Pf	Pb	Pa	F

Note F:Filament P:Anode G:Grid