

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# Quarton Laser Module

## Part #VLM-650001 (LPA/LPT)

### Mechanical Dimensions (UNITS: mm)

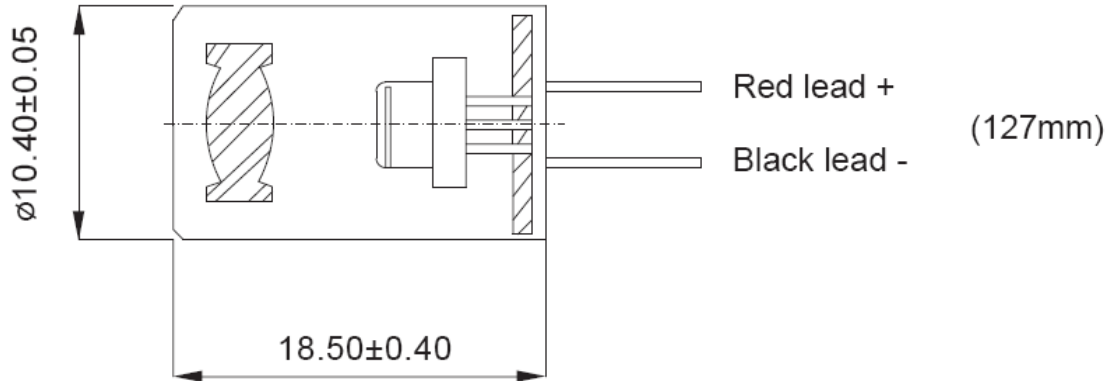

<b>SPECIFICATIONS:</b>	<b>VLM-650001 LPA</b>	<b>VLM-650001 LPT</b>
APC Driver Circuit	Yes	Yes
Collimating Lens	Aspherical Plastic	Aspherical Plastic
Cw Output Power (Po)	<b>≤3 mW</b>	<b>Less than 1.0 mW</b>
Divergence	1.6 mrad	1.6 mrad
ESD Protection	15 KV	15 KV
Housing	Brass	Brass
Laser Class / Applicable Countries	<b>Class 3a / USA</b>	<b>Class 2 / Europe, Japan, USA</b>
Mean time to failure (MTTF) 3mW 25°	10,000 Hours	10,000 Hours
Operating Current (Iop)	40 ± 15 mA	40 ± 15 mA
Operating Voltage (Vop)	3 ~ 5V	3 ~ 5V
Power Connection	Wire leads (2)	Wire leads (2)
Spot size at 5m.	6mm (± 2mm)	6mm (± 2mm)
Temperature Range - Operating	+10°C thru +40°C	+10°C thru +40°C
Temperature Range - Storage	-20°C thru +65°C	-20°C thru +65°C
Wavelength at peak emission (λp)	645 ~ 665nm	645 ~ 665nm
RoHS Compliant	Yes	Yes

#### Application Notes:

- For general laser sighting applications.
- Spring Leads use part #VLM-650001 SPA for Class 3a. **(USA)**
- Spring Leads use part #VLM-650001 SPT for Class 2. **(USA, Europe, Japan)**