

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



ENFIS QUATTRO Mini Air Cooled Light Engine

Rich mono spot source and colour/CCT changing with 144 high-power LEDs

Features & Benefits

Two Formats

• Plug & Play

- Just plug in and go straight from the box!

• Luminaire integration kit

- Array on connectorized PCB with mounting holes.
- Separately housed driver module

Superior colour mixing with dense packaging and interleaving of colours

4.3 Billion colours

- Rich colours and wide dynamic range
- 4 x 256 step dimming

Full colour/colour temperature control and monitoring


140W: High Power intense light from a 4cm² array

DMX512 compatible

Smart thermal protection system

Life-long 100% Lumen maintenance

System 3-year warranty

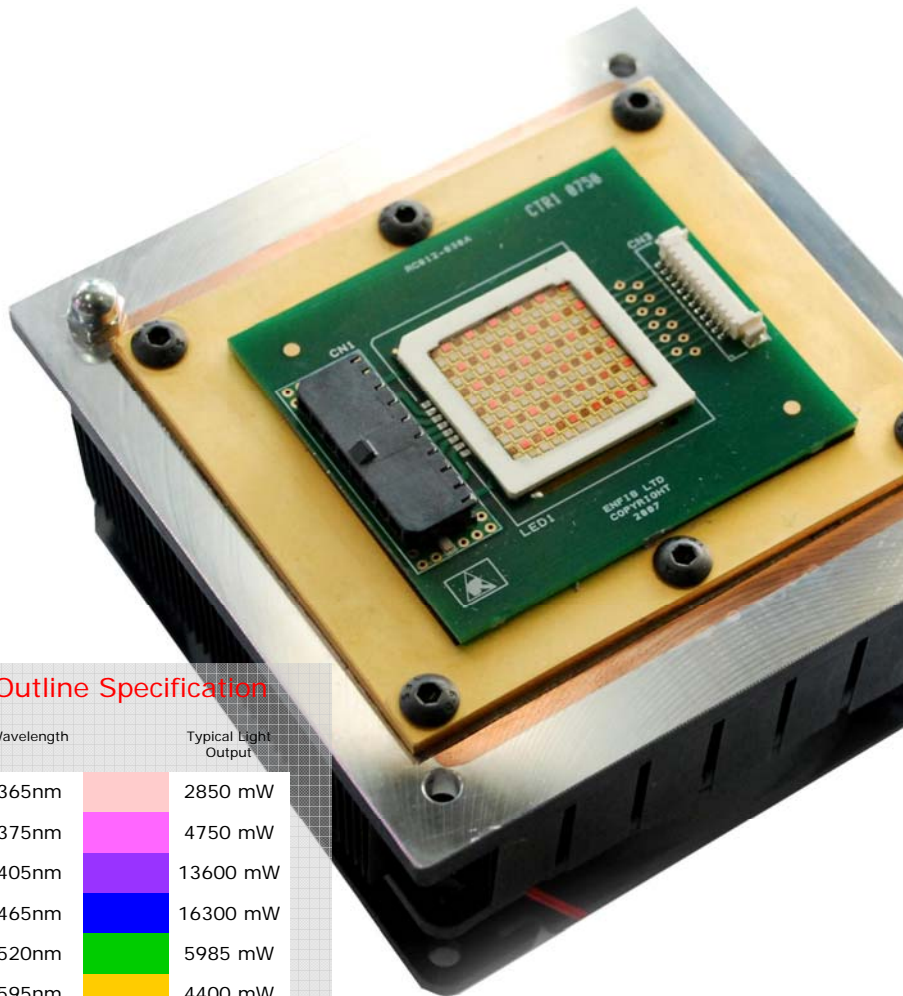

Applications & Markets

- ◆ Architectural lighting
 - Exterior buried spotlights
 - Exterior floodlights
 - Exterior/interior wall-washing
 - Interior colour/CCT-variable lighting
- ◆ Entertainment lighting
 - Club/bar lighting
 - Theatre spot gel replacement
 - Moving spots
- ◆ Fibre optic lighting
 - Colour/CCT-changing illuminator light sources
- ◆ Retail lighting
 - Colour/CCT-variable spotlights
 - Display lighting

Outline Specification

Wavelength	Typical Light Output
365nm	2850 mW
375nm	4750 mW
405nm	13600 mW
465nm	16300 mW
520nm	5985 mW
595nm	4400 mW
630nm	13170 mW
870nm	11200 mW
4250°K	3465 lm
RGBA	2385 lm
RGBW	2575 lm
Hi-Cri	2675 lm

ENFIS LIMITED
 Technium 2, Kings Road,
 Swansea Waterfront,
 Swansea, SA18PJ, UK
 Tel +44 (0)1792 485660
 Fax +44 (0)1792 485537
 www.enfis.com
 info@enfis.com








ENFIS QUATTRO Mini Air Cooled Light Engine

Technical Specification

Electro-Optical Characteristics

Colour	Peak Wavelength (nm)	Typ. Light Output (mW)	Typ. Light Output (lm)	Total Electrical Power (W)
SUVA	365	2850	-	100
UVA	375	4750	-	100
Violet	405	13600	-	140
Blue	465	16630	1005	140
Green	520	5985	2660	140
Amber	595	4400	2085	140
Red	630	13170	2080	140
NIR	870	11200	-	140
Neutral White	3900-4600K	-	3465	140
RGBA	-	-	2385	140
RGBW	-	-	2575	140
Hi Cri	-	-	2675	140
Please contact Enfis Ltd for further information				

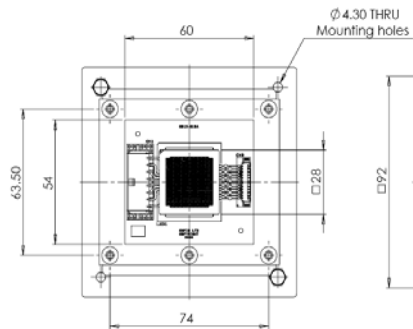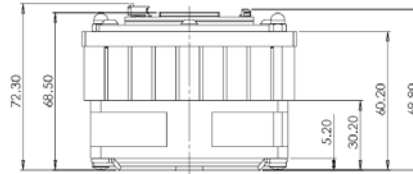

Electronics:

Technical Specification

Operating temperature -10°C to +45°C
Storage temperature -20°C to +85°C

Input To Driver

Input voltage 48V DC <5A

Ambient temperature = 25°C

LED Driver PCB

Efficient LED driver based on switch mode technology
Temperature monitoring and control
USB/Serial PC interface

Connectivity

TTL interface with USB convertor (USB connector head provided)

Thermal Management

Composite metal heatsink with integrated low noise DC fan - Low thermal resistance System

Handling LED Array

Contact with the encapsulation on the surface of the LED array must be avoided to prevent damage. Do not apply pressure to the encapsulation or allow it to come into contact with sharp objects. During operation the encapsulation will be hot and contact should be avoided.

Static Electricity

Care must be taken when handling, these products are sensitive to static electricity .
Observe static handling precautions.



Cleaning

Avoid touching the LED array surface.
To clean—BLOW surface with either dry air or nitrogen gas

Eye Safety Precautions

The light output of the products may cause injuries to human eyes in circumstances where the products are viewed directly with unshielded eyes for more than a few seconds.

Please refer to IEC 60825-1:2001 for further information



ENFIS LIMITED
Technium 2, Kings Road,
Swansea Waterfront,
Swansea, SA18PJ, UK
Tel +44 (0)1792 485660
Fax +44 (0)1792 485537

