

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



## SG901-1066 Integrated Wi-Fi Antenna


### Overview

The SG901-1066 is a small highly integrated high efficiency, low gain, embedded antenna solution for WLAN products. The focus of this antenna is for next generation wireless product design. It provides the flexibility of an embedded antenna with top performance. The Embedded Antenna was designed to accommodate most WLAN applications, such as routers and gateways. The product can be easily integrated onto a board or into an ID package design.

### Features

The SG901-1066 Embedded Antenna is defined by the following features:

- IEEE 802.11 b/g/n standards
- Case mount with 10 cm cable
- 3.8 dBi peak gain, 1 db cable loss excluded
- High efficiency
- Quick integration
- RoHS compliant

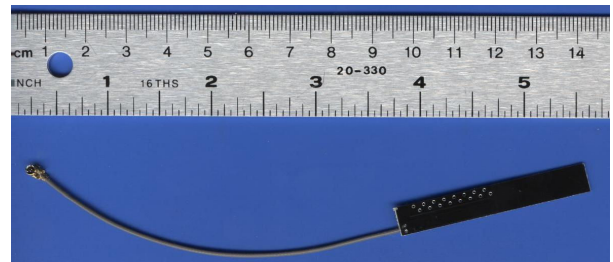

### Ordering Information

SG901066-C: Bulk only


**Note:** Cable length is available in different lengths, please call Sagrad Sales for details.




## Radiation Patterns

Patterns for Free Standing Antenna

Patterns taken on 90mm x 90mm x 2.2mm thick, ABS Plastic sheet using 1.6mm double sided tape.

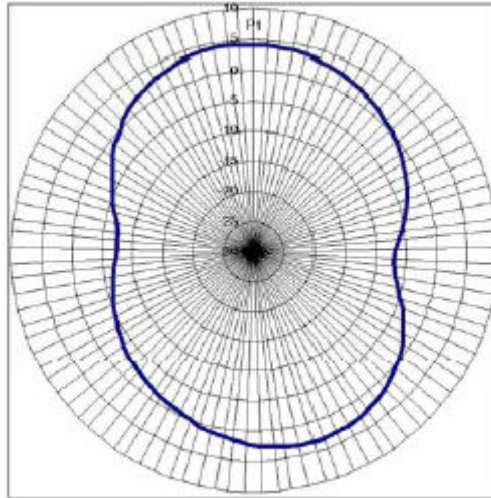

Measured Azimuth Radiation Pattern

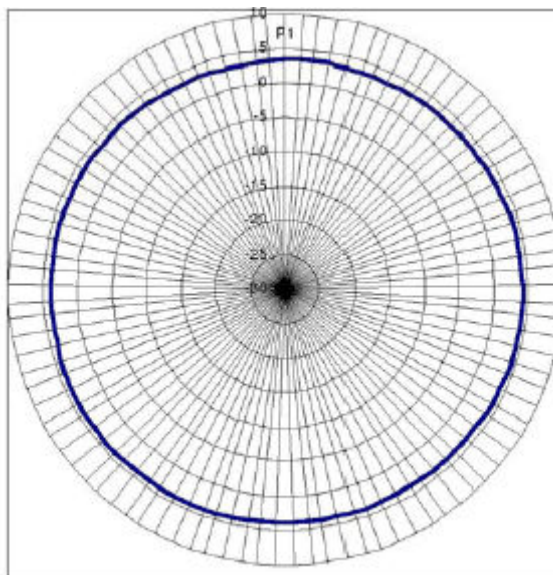


Measured Elevation Radiation Pattern



## General Specifications and Interface

Standard	IEEE 802.11n and 802.11 b/g
Frequency Range	2.4 to 2.49 GHz
Peak Gain	3.8 dBi, 1 db cable loss excluded
VSWR	2:1
Feed Impedance	50 Ohms
Power Handling	30 dBm
Interface	One set of soldering pads for 50 ohm, 1.13mm diameter, Micro coax cable
Antenna Dimensions	48.3 x 7.3 (mm)
Weight	0.4 g (0.014 oz)

## Dimensions

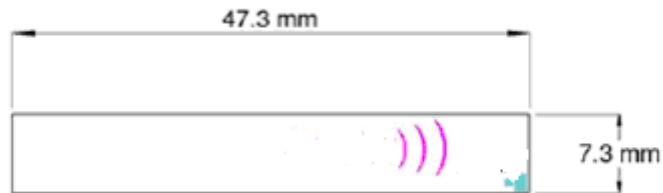

SG901-1066 Embedded Antenna Dimensions