

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



### QUAD-BAND ANTENNA IS IDEAL FOR STEALTH APPLICATIONS

The Blade antenna provides versatile options for stealth applications and includes AMPS, GSM, DCS, and PCS cellular radio frequencies. The antenna provides multiple application options with high gain performance and measures only 125.5 x 34 x 5.1mm, allowing covert installation into vehicle interiors. The antenna can be paired with the Internal GPS antenna, part #637108, to support combined cellular plus GPS function.

Laird Technologies is a leading supplier of mobile antenna solutions for automotive, asset tracking and consumer electronics industries. Products include cellular antennas (AMPS, GSM/DCS/PCS, UMTS), GPS antennas, entertainment antennas (AM/FM, DAB, DVB-T, Satellite radio, TV), mobile communication antennas (Bluetooth, DSRC, RKE, TPMS, WiFi), satellite communication antennas and battery packs.

Leveraging our experience in M2M wireless modules, Laird Technologies also designs smart antennas integrating functionalities such as cellular, WiFi and Bluetooth® modems, GPS receivers and vehicle networking. All of these capabilities can be further integrated into M2M Devices, that add control electronics and firmware to provide the latest evolution in telematics systems.

### FEATURES

- Slim, flexible design for easy integration into vehicles
- Compact, ideally suited for stealth applications
- Maximum passive gain within form factor

### BENEFITS

- Low total-cost implementation
- Easy installation
- Easy concealment
- Small package size
- Meets enhanced environmental specifications

### APPLICATIONS

- General automotive aftermarket
- Fleet logistics, tracking, and diagnostics
- Theft protection
- Vehicle and asset recovery
- Navigation systems
- Infotainment systems
- On-board computing

global solutions: local support.™

Americas: +810.695.9810  
Europe: +44.1628.858.940  
Asia: +852.2268.6567



Innovative **Technology**  
for a **Connected** World

# Asset Tracking Internal Antenna Cellular|Blade

## Blade

AMPS      GSM      DCS      PCS

### ANTENNA SPECIFICATION

	824-894 MHz	880-960 MHz	1710-1880 MHz	1850-1990 MHz
Frequency Range	824-894 MHz	880-960 MHz	1710-1880 MHz	1850-1990 MHz
Peak Gain	2.3 dBi	2.3 dBi	2.1 dBi	3.1 dBi
Polarization	Linear	Linear	Linear	Linear
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Output VSWR (Min. Performance)	≤ 2:1	≤ 2:1	≤ 2:1	≤ 2:1

### MECHANICAL SPECIFICATION


Dimension	125.5 x 34 x 5.1mm
Radome Material	Cycoloy
Connector	SMC
Cable Length	4000 mm
Cable Type	RG-174 Coaxial
Mounting Method	Velcro, Adhesive

### ENVIRONMENTAL SPECIFICATION

Operating Temperature	-40° to +85°C
Humidity	Operation 95% RH at 65°C
Ingress Protection	IP-50
Drop Test / Shock	50 g shocks 10x3 axis / 1 meter drop 6 axis
Vibration	10-1000 Hz vibration 1 hour 3 axis

### ORDERING INFORMATION

Part Number	637109
Customization available w/MOQ	Cable type, length, connector type, mounting style

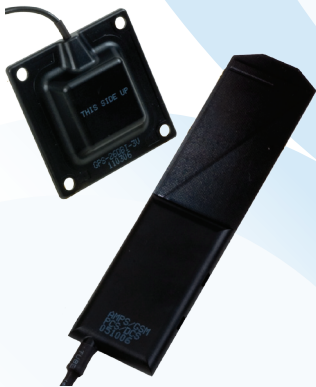

#### TEL-DS-Internal-Blade 1210

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

Order with **637108** for a combination  
GPS/Cellular solution. Part #637110.