

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

SPECIFICATION

- Part No. : **PC24.07.0100A**
- Product Name : **TheStripe™** 850/900/1800/1900MHz GSM PCB Antenna
100mm Ø1.13mm IPEX MHF connector (U.FL)
- Features : 42mm*42mm*1.6mm
Compatible with Hirose U.FL
RoHS Compliant

Photo:

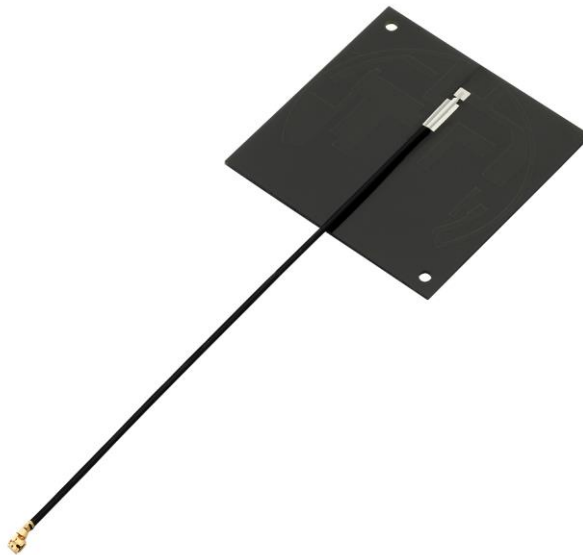

1. Introduction

The PC24 Internal PCB Antenna is a compact square Quad-band GSM antenna for incorporation in antennas and transceiver modules to be used worldwide. Omni-directional gain across all bands ensures constant reception and transmission. Cables and connectors are fully customizable. Antennas can be tuned to customer housing on request.


2. Typical Antenna Performance in free space

Specifications				
ELECTRICAL				
	AMPS	GSM	PCS	DCS
Band	824-896	880-960	1850-1990	1710-1880
Return Loss	-12 dB	-25 dB	-12 dB	-10 dB
Gain	Average 0 dBi			
Polarization	Linear			
Impedance	50 ohms			
Input Power	10 watts			
Input Connection	Coaxial Cable – IpeX 1.13 100mm MHF Standard, Fully customizable			
VSWR (Min performance)	<2.0:1			
MECHANICAL				
Dimensions (L x W)	42 mm x 42mm			

***note: specifications may be subject to change**




3.Drawing

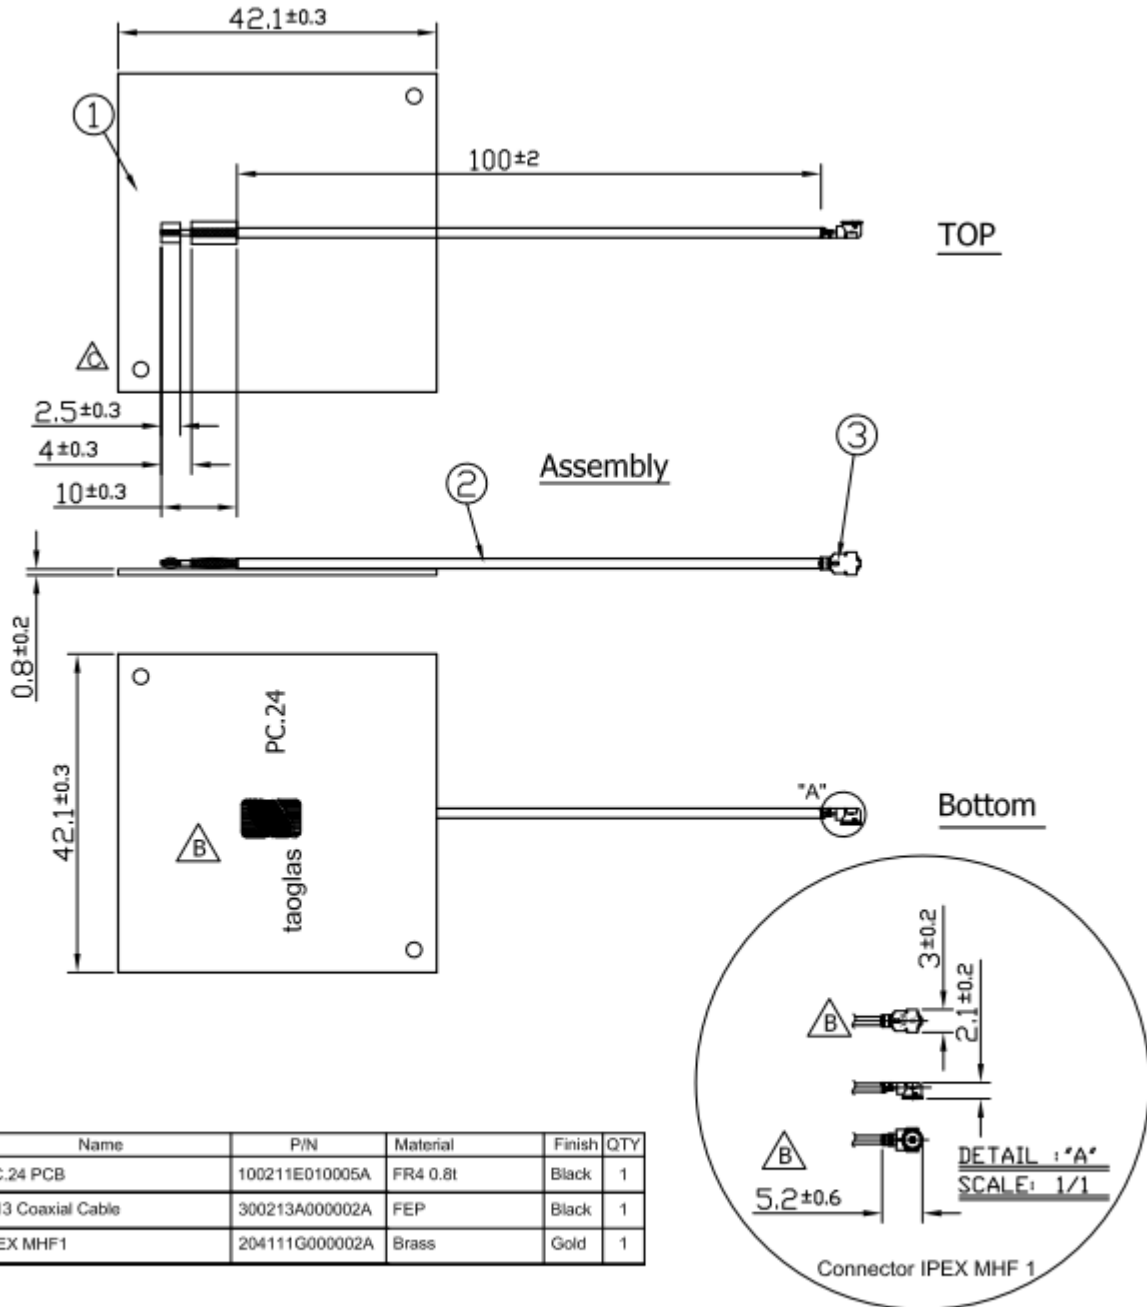


	Name	P/N	Material	Finish	QTY
1	PC.24 PCB	100211E010005A	FR4 0.8t	Black	1
2	1.13 Coaxial Cable	300213A000002A	FEP	Black	1
3	IPEX MHF1	204111G000002A	Brass	Gold	1

4. S11 Magnitude

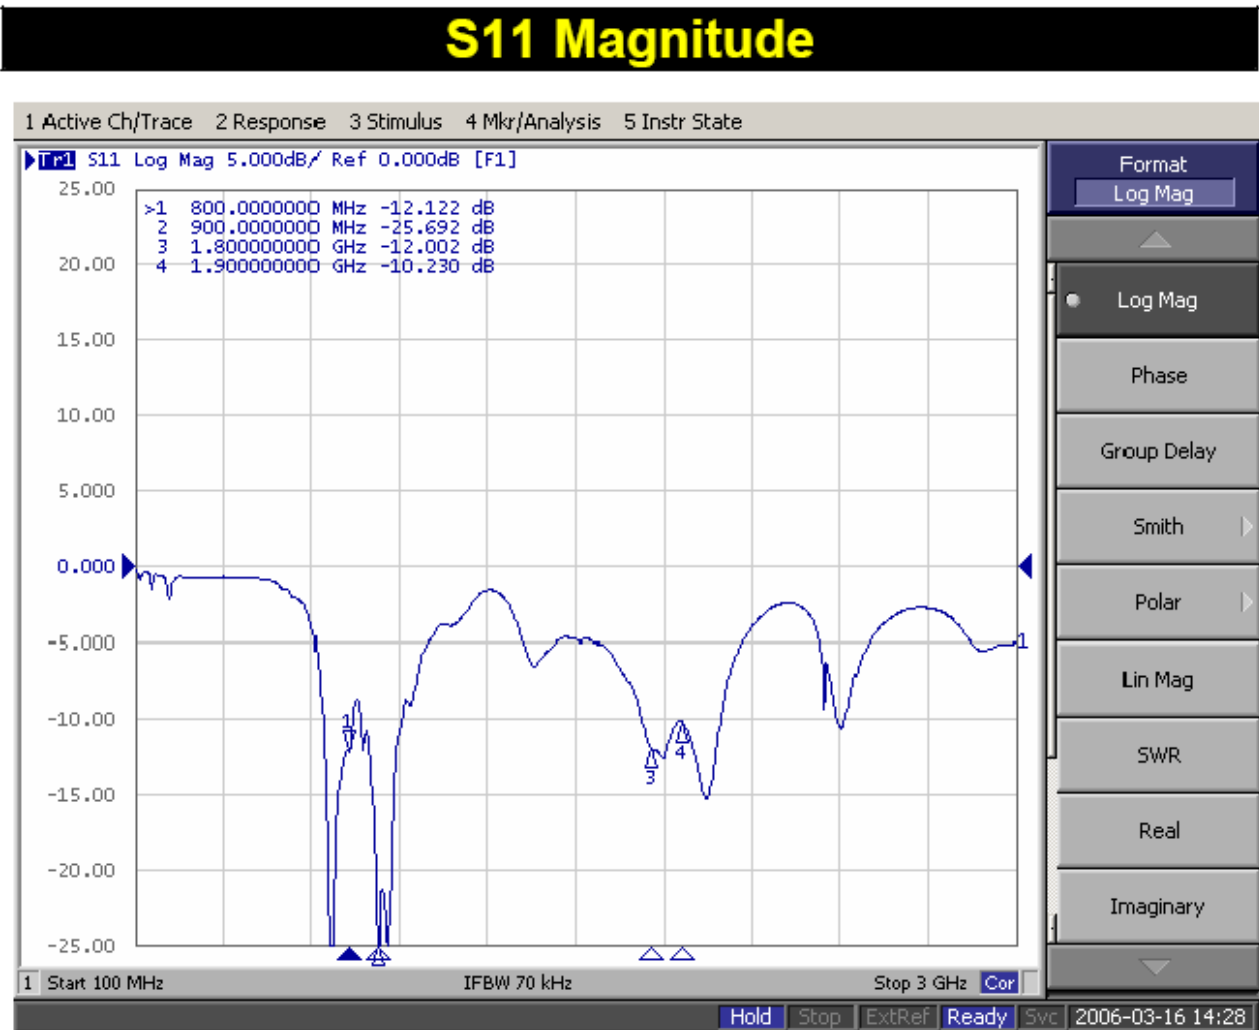


5. Radiation Patterns


800 MHz – 3D Radiation Pattern

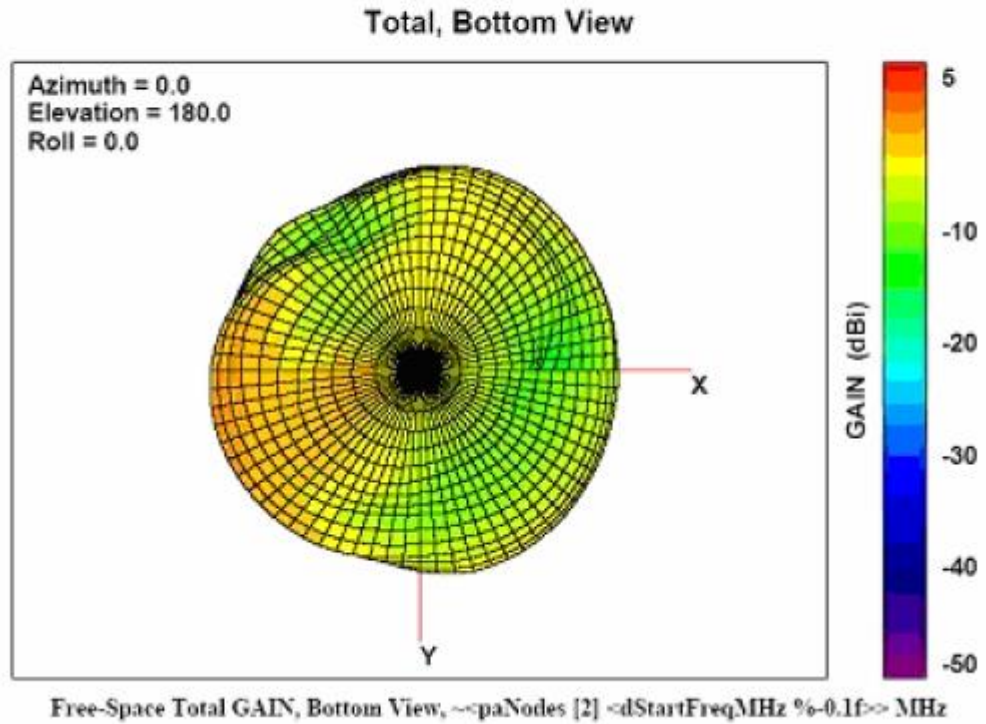

900 MHz – 3D Radiation Pattern

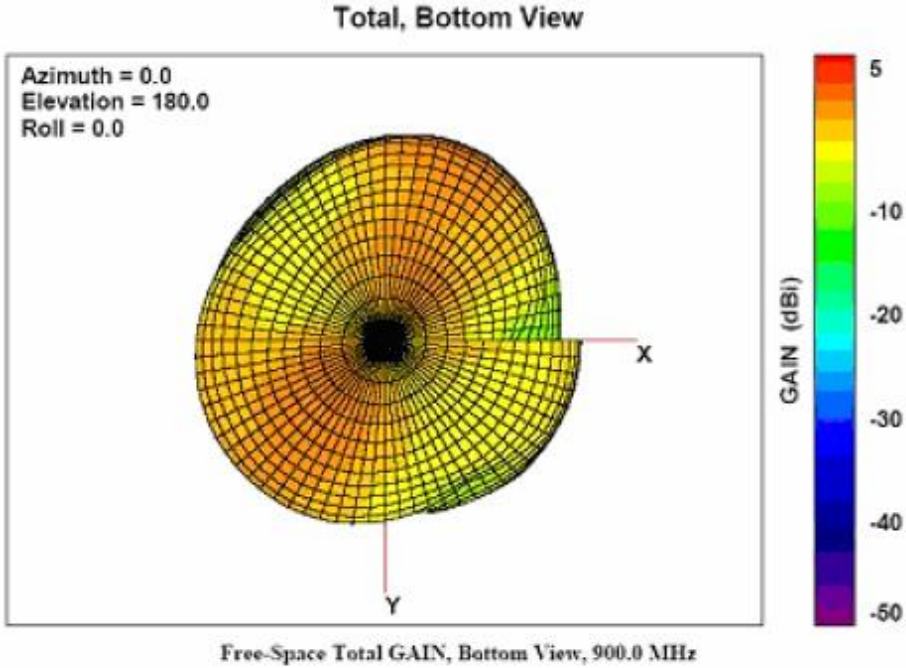

1800 MHz – 3D Radiation Pattern

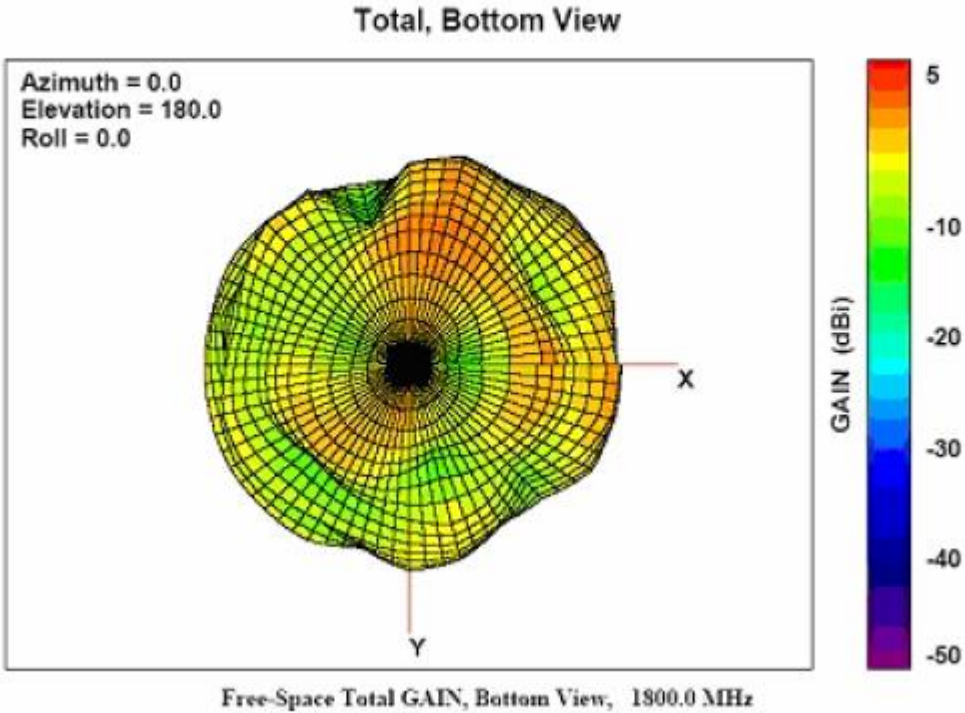

1900 MHz – 3D Radiation Pattern

