

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Synapse Wireless Lighting Control Products

Deploy and remotely manage
LED lighting locally or over the Internet.

SNAP Intelligent Lighting Products can be easily integrated into new or existing lighting systems using standard interfaces like 0-10V, DMX, RDM and TCP/IP. No predetermined routing or complex network programming is needed. It simply works.

SNAP Intelligent Lighting products are reliably networked using the SNAP network operating system. In addition to providing off-the-shelf wireless control and monitoring functionality, Synapse can also provide customized services when special engineering requirements or regulations call for unique features.

SNAP Intelligent Lighting Products

- Based on the Synapse SNAP Network OS
- Internet-enabled for mobile or desktop access
- Easy to integrate into new or existing designs
- Remotely control individual or groups of lights
- Color tuning and brightness control – On/Off
- Measure and monitor heat, current, voltage
- Automated adjustment to ambient light
- Motion controlled or timed dimming
- Zone control and failure detection

For more information call or visit:


(877) 982-7888 // synapse-wireless.com

Proven Solutions for the
Internet of Everything

 **synapse**[®]

SNAP Intelligent Lighting Products

Part #	Description
LP400-001	SNAP Cloud Appliance to create a transparent gateway between any SNAP network and Internet (includes 1st year of SNAP Lighting Cloud Service LP480-001)
LP485-XXX	SNAP Lighting Cloud Service to remotely control or monitor luminaries via the Internet (2nd year and onward for annual service license – updates included)
LPSET-001	Setup Service for customer's web site required for initial setup of SNAP Lighting Cloud Service
LP001-001 LP002-001	SNAP DIM-10 for dimming and full on/off for 1–10 fixtures – 240V SNAP DIM-10 for dimming and full on/off for 1–10 fixtures – 277V
LP301-001	SNAP Switch for wireless lighting control via wall mounted switch
LP201-002	SNAP LightSense for wireless occupancy sensor supports daylight harvesting using digital ambient light monitoring
LPEK1000	Intelligent Lighting Kit for test sites and demos to dim and control lights using PWM or 0-10V dimmable LED drivers

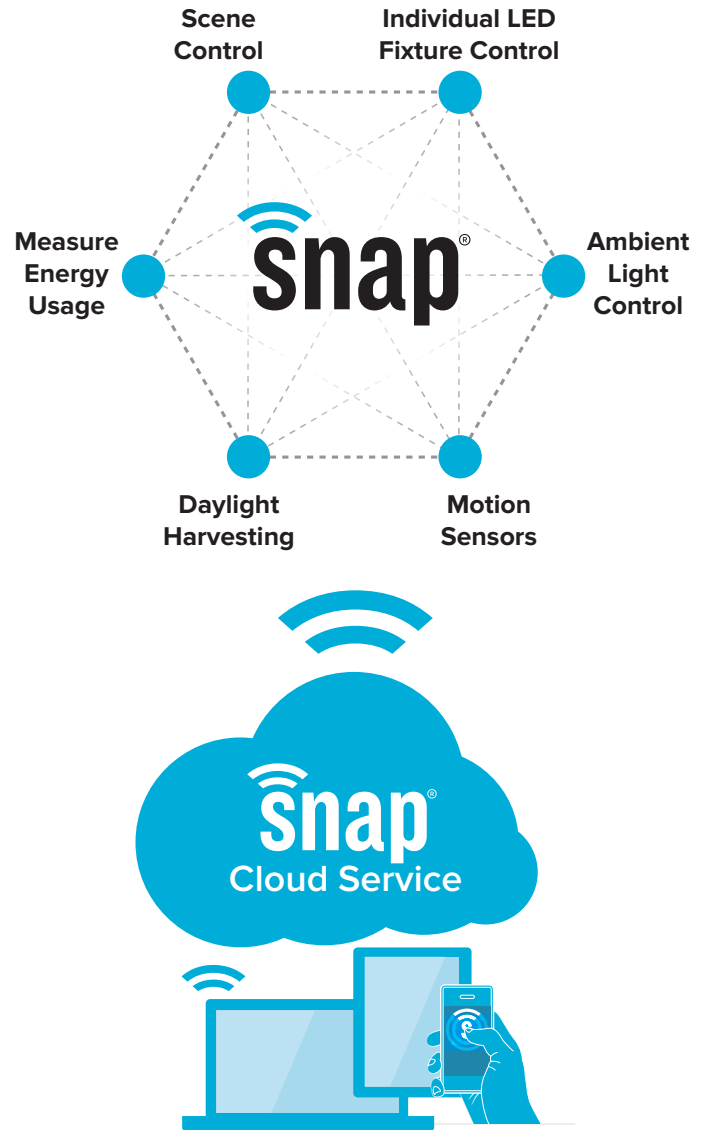

SNAP Cloud Lighting Service

