


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

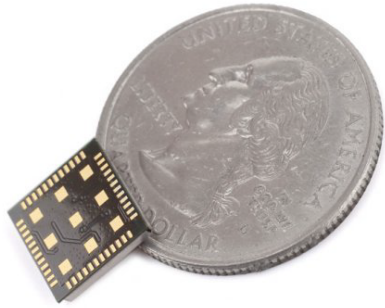

LinkIt MT5931 Module -Scale for Wi-Fi module

SKU: 317060010

(images/product/317060010 1_02.jpg)

Description

LinkIt MT5931 Module is a low-cost and low-power consumption Wi-Fi SiP module. The module is targeted to mobile devices including smart phone, PDA, Wi-Fi phone, DSC, DVC which need small Wi-Fi module. The highly integrated module allows the usage of web browsing, VoIP application. The wireless SiP module support IEEE 802.11b/g/n standard and it can provide up to 72Mbps(GI=400ns) for IEEE 802.11n, 54Mbps for IEEE 802.11g, 11Mbps for 802.11b to connect your wireless LAN.

Features:

- Small footprint: 9.8mm x 9.8mm x 1.7mm
- Host interface: SDIO 2.0(4 bit&1-bit)
- Support Orthogonal Frequency Division Multiplexing(OFDM), Complementary Code Keying(CCK), and Direct Sequence Spread Spectrum(DSSS) to provide a variety of data rates
- Integrated switching regulator enables direct connection to battery
- Support AP/STA/ad-hoc mode
- IEEE 802.11n(HT20 MCS7), IEEE802.11g(OFDM 54Mbps) and IEEE 802.11b(DSSS 11Mbps)
- Support Wi-Fi Direct(WFA P-2-P Standard)
- Security: WFA WPA/WPA2 personal, WPS2.0, WAPI(Hardware)
- QoS: WFA WMM, WMM PS
- Support Bluetooth co-existence
- Support low power consumption sleep mode via 32kHz clock
- RoHS & Halogen free compliant/Lead free

Specification:

Model Name: CW01S-5931

Product Description: Wi-Fi SiP

Network Standard: IEEE 802.11b/g/n Compliant

Host Interface: SDIO 2.0(4-bit&1-bit)

Operation Conditions

Operating Voltage: 3.6V/2.8V

Temperature: Operating: -20~70°C

Storage: -40~85°C

Humidity: Operating: 10~95%
Storage: 5~95%
Dimension: 9.8mm x 9.8mm x 1.7mm
Package: LGA

Electrical Specifications

Frequency: 2.4GHz ISM radio band
Channel: 1~14
Modulation: DSSS, OFDM, 64-QAM, 16-QAM, QPSK, BPSK, CCK, DQPSK, DBPSK
Security: WFA WPA/WPA2 personal
WPS2.0
WAPI

Overview

Designer: Others
Other Products From This Designer (<http://www.seeedstudio.com/depot/Others-m-24.html?ref=pinfo>)
Weight: 2 g