

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement


1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Embedded Serial-to-Bluetooth® Device Server

The SocketWireless® Bluetooth® device server utilizes Bluetooth technology to provide a secure, standards-based wireless connection between a host and peripheral device.

Providing wireless data transfer up to 100 meters, it completely eliminates the need for serial cable connections.

This ready-to-integrate, embedded, wireless communications device is designed around Multi-Tech's space-efficient, universal socket architecture.

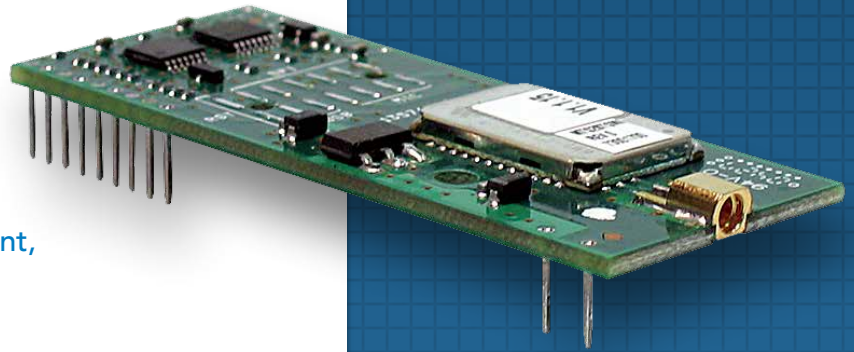


Features

- Class 1 Bluetooth V2.0 compliant communications device with a maximum range of 100 meters (330 feet)
- Creates wireless serial link transparent to application software
- Supports point-to-point and multi-point communications
- Secure and robust communication link
- Operating system independent
- Serial interface supporting speeds from 1200 bps to 921.6K bps
- AT command software interface
- Hardware flow control
- Space efficient, universal socket connectivity
- LED driver outputs for visual monitoring speed, link, activity, collision and duplex mode
- Auto connect
- Two-year warranty

Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

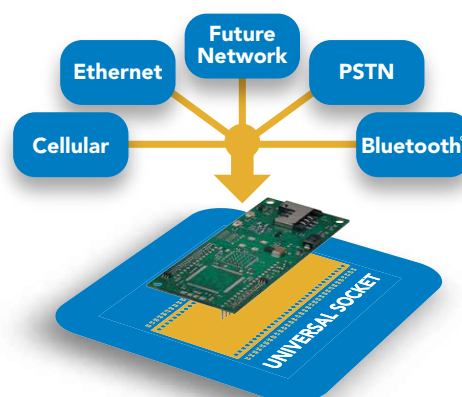

Specifications

Power Requirements

5VDC or 3.3VDC

Power Usage (Typical)

Idle: 1.5mA @ 3.3VDC, 1.6mA @ 5VDC

Master Connected: 6mA @ 3.3VDC, 7mA @ 5VDC

Fast Data: 21mA @ 3.3VDC, 38mA @ 5VDC

Master Inquiry: 68mA @ 3.3VDC, 74mA @ 5VDC

Physical Description

2.541" L × 1.045" W × 0.680" H; 0.6 oz.
(6.45 cm × 2.65 cm × 1.7 cm; 0.017 kg.)

Operating Environment

Temperature Range: -40° to +70° C

Approvals

EMC: FCC Part 15.247:2004 (subpart C), EN 301 489-1 V1.4.1 (2002-08)

Safety: UL 60950; EN 60950, CSA 950, UL 60950-1, IEC60950-1, ACA TS001/AS3260, CCC

EMC: FCC CFR47 Part 15 (Class B); ICES-003 Canada (Class B); EN 55022 (Class B), EN 55024

Highlights

Applications

The SocketWireless Bluetooth device server is targeted at applications that need a serial connection without running cable. It is ideal for:

- Connecting to other Bluetooth-enabled devices
- Delivery trucks
- Emergency vehicles
- Gas pumps
- Home healthcare
- Outdoor signs
- Restaurant Environment
- Retail Environment
- Security systems/ Surveillance cameras

Instant Serial Cable Replacement

Running serial cabling can be expensive and sometimes problematic especially if it is in an outdoor environment. With the SocketWireless Bluetooth device server, you can eliminate the cable and connect your peripheral devices effortlessly with a Bluetooth wireless network. In a point-to-point connection, one device server is embedded in a host device, such as a PC; the other is attached to a serial peripheral device such as a bar-code scanner, receipt printer or scale. Now you can use the wireless network to transfer information between the host and the device for up to 100 meters.

Wireless Host Connection

The SocketWireless Bluetooth device server can also connect to any other Bluetooth-enabled device, such as a PDA or WAN radio increasing user mobility in mission-critical applications such as emergency vehicles, delivery trucks, medical monitoring, and point-of-sale environments. It is operating system independent and can be seamlessly embedded in any peripheral device. No application software is needed.

Secure, Robust Communication

The SocketWireless Bluetooth device server complies with the Bluetooth specifications for security and includes 56-bit encryption and 10 alphanumeric Personal Identification Number (PIN) authentication. It utilizes FHSS (Frequency Hopping Spread Spectrum) technology. In addition, it uses error correction schemes for guaranteed packet delivery.

SocketWireless Bluetooth Pin-out

The SocketWireless Bluetooth device server interfaces easily with existing devices through a standard serial interface. The serial DTE channel is capable of transfer speeds up to 921.6 K bps and can be interfaced directly to a UART or microcontroller.

(I/O) Tip	1	○	64	SPKR (O)
(I/O) Ring	2	○	63	GND (O)
Safety Void	3	×	62	MICV (I)
(O) TX+	4	○	61	VCC (I)
(O) TX-	5	○	60	-LED SPD (O)
(I) RX+	6	○	59	-LED COL (O)
(I) RX-	7	○	58	-LED LINK (O)
Safety Void	8	×	57	-LED ACT (O)
	9		56	-LED FDX (O)
	10		55	
(O) TXCLK	11	○	54	
(O) RXCLK	12	○	53	
	13		52	
	14		51	GPIO (I/O)
	15		50	GPIO (I/O)
	16		49	GPIO (I/O)
	17		48	GPIO (I/O)
	18		47	
	19		46	
	20		45	
(I)	21		44	
(I) Mic+	22	○	43	SPK+ (O)
(I) Mic-	23	○	42	SPK- (O)
(I) -Reset	24	○	41	GND (I)
(I) USB_VBUS	25	○	40	-DTR (I)
(I) GND	26	○	39	-DCD (O)
(I/O) USB_DP	27	○	38	-CTS (O)
(I/O) USB_DN	28	○	37	-DSR (O)
(O) LED DCD	29	○	36	-RI (O)
(O) LED RX	30	○	35	-TXD (I)
(O) LED DTR	31	○	34	-RXD (O)
(O) LED TX	32	○	33	-RTS (I)

Universal Socket Connectivity

Multi-Tech's universal socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi® network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

Ordering Information

Product	Description	Region
MTS2BTSMI	Serial-to-Bluetooth, C1 V2.0 5V	Global
MTS2BTSMI-L	Serial-to-Bluetooth, C1 V2.0 3.3V	Global

Developer's Kit

The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, universal power supply, antenna and RS-232 cable.

Services & Warranty

Multi-Tech's comprehensive Support Services programs offer a full array of options to suit your specific needs. These services are aimed at protecting your investment, extending the life of your solution or product, and reducing total cost of ownership. Our seasoned technical experts, with an average tenure of more than 10 years, can walk you through smooth installations, troubleshoot issues and help you with configurations. Products include a 2-year warranty.

Installation Support

Multi-Tech's Installation Support Service delivers priority service with the ability to work one-on-one with an experienced Multi-Tech technical support engineer, to guide you through the installation process for our products.

Technical Support Services

At Multi-Tech, we're committed to providing you personalized attention and quality service while providing you a quick response to your product support needs. We have several options of support for you to choose from.

For additional information on Support Services as well as other service offerings, please contact your Multi-Tech representative or visit www.multitech.com/support.go.

World Headquarters

Multi-Tech Systems, Inc.
2205 Woodale Drive
Mounds View, MN 55112 U.S.A.
Tel: 763-785-3500
Toll-Free: 800-328-9717
Email: sales@multitech.com
www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
Unit 1, Thames Court
2 Richfield Avenue
Reading, Berkshire RG1 8EQ
United Kingdom
Tel: +(44) 118 959 7774
Email: sales@multitech.co.uk