

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

SocketModem® EDGE

Embedded Cellular Modem




The SocketModem® EDGE cellular modem delivers enhanced data speeds when compared to GPRS by utilizing EDGE technology. It allows users to connect to the Internet and send and receive data up to three times faster than possible with an ordinary GSM/GPRS network making it ideal for data-intensive applications. Based on industry-standard open interfaces, the SocketModem EDGE cellular modem is equipped with quad-band GSM, which means it can be used worldwide on all existing GSM networks. In addition, it utilizes Multi-Tech's Universal Socket design.

Features

- EDGE (E-GPRS) Class 12
- GPRS Class 12
- Quad-band GSM 850/900/1800/1900 MHz
- Packet data rates up to 240K bps (coding scheme, MCS-9, LLC layer, 4 time slots)
- Universal Socket connectivity
- Embedded TCP/IP stack supports TCP, UDP, FTP, SMTP, POP3, HTTP
- Circuit-switched data up to 14.4K bps non-transparent mode
- Supports Short Message Service such as text and PDU mode, point-to-point (MT/MO) and cell broadcast
- MMCX antenna connector
- SIM card holder
- Serial interface supporting DTE speeds to 460K bps
- AT command compatible
- FCC, IC, PTCRB and R&TTE certified
- Voice features include Half rate (HR), Full rate (FR), Enhanced full rate (EFR), Adaptive multi rate (AMR), as well as hands free echo cancellation, and noise reduction
- Two-year warranty

Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

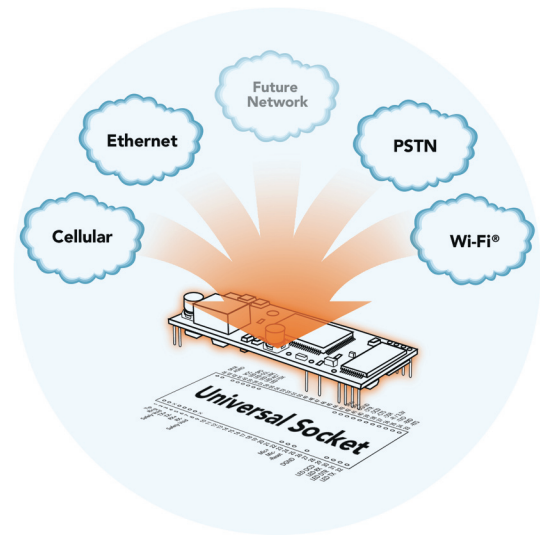

Highlights


Applications. With packet data speeds up to three times faster than ordinary GPRS modems, the SocketModem EDGE cellular modem is targeted at data-intensive applications such as remote video surveillance and other multimedia applications where you are sending digital images, web pages and photographs.

Integration Reduces Space, Power and Cost. The SocketModem EDGE cellular modem integrates the controller, RF transceiver, and antenna interface in one communications device. This integration requires low power, low real estate and provides an overall reduction in costs.

Reduces Development Time. The SocketModem EDGE cellular modem enhances your product while you focus on developing its core features. It actually provides faster time-to-market because it relieves the burden and expense of obtaining PTCRB and RF approvals.

Internet-enabled. The SocketModem EDGE cellular modem includes an embedded TCP/IP protocol stack to bring Internet connectivity to any device without making changes to its hardware design. Using the Internet protocols and the wireless connection to an IP network, it sends and receives data over the Internet.

SocketModem EDGE Pin-Out. The SocketModem EDGE cellular modem interfaces easily with existing products through a standard serial communication channel. The serial DTE channel is capable of transfer speeds to 460K bps and can be interfaced directly to a UART or microcontroller. The complete on-board RF transceiver interfaces with an antenna for direct connection to wireless SMS, circuit-switched dial-up, or packet data networks. It also includes an onboard LED to display network status.

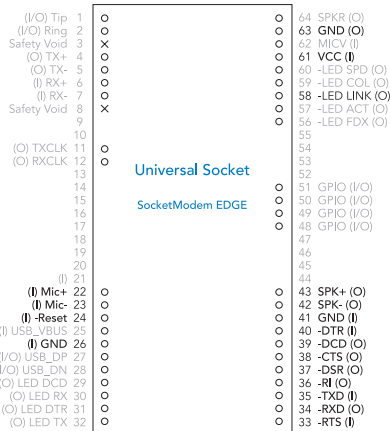

Universal Socket Connectivity. Multi-Tech's Universal Socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

Developers Kit. The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, universal power supply, antenna and RS-232 cable.

Specifications

Packet Data Features

- EDGE: E-GPRS Class 12, Modulation & coding scheme MCS 1-9, Mobile station Class B
- GPRS: GPRS Class 12, full PBCCH support, coding scheme 1 – 4, Mobile station Class B

Circuit Switched Data/Fax Features

- Asynchronous, non-transparent up to 14.4K bps

SMS Features

- Text & PDU, Point-to-Point, cell broadcast

Connectors

- Antenna: MMCX
- SIM: Standard 1.8/3V SIM receptacle

IP Protocols Supported

- TCP, UDP, FTP, SMTP, POP3, HTTP

Power Requirements

- Sleep: 10mA (.05W @ 5VDC)
- Typical: 128mA (.64W @ 5VDC)
- Maximum: 675mA (3.2W @ 5VDC)
- Peak: 1.5A

Physical Description

- 2.55" L x 1.4" W x 0.5" H; 1 oz.
- (6.48 cm x 3.5 cm x .87 cm; 20 g)

Operating Environment

- 30° to +70° C

Certifications

- CE Mark, R&TTE
- EMC: FCC Part 2, 15, 22, 24, EN 55022, EN 55024
- Safety: cUL 60950-1, IEC 60950-1, UL 60950-1, AS/NZS 60950-1
- Network: PTCRB
- RoHS Compliant

Ordering Information

Product	Description	Region
MTSMC-E1	Quad-band EDGE Class 12	Global
MTSMC-E1-V	Quad-band EDGE Class 12 (Voice)	Global

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: SocketModem, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

World Headquarters
Tel: (763) 785-3500
(800) 328-9717
www.multitech.com

EMEA Headquarters
Multi-Tech Systems (EMEA)
United Kingdom
Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)
France
Tel: +(33) 1 49 19 22 06

