

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# SocketWireless® Wi-Fi®

## Embedded Serial-to-Wi-Fi Device Server




The SocketWireless® Wi-Fi® device server connects serial devices to an IP network via 802.11b/g wireless networking. It enables you to build wireless networking into virtually any device allowing for remote monitoring, control and configuration. The space efficient communications device (1" x 2.5") integrates Multi-Tech's Universal IP™ stack, and can make your existing and next generation device, machine or system, IP-ready while you focus on developing its core features.

### Features

- Complete serial-to-Wi-Fi wireless connectivity solution including network processor, media access controller and air interface
- 802.11b/g compliant wireless networking
- Wi-Fi security using WEP, WPA and WPA2
- Universal Socket connectivity
- Intelligent Universal IP stack for enhanced M2M functionality
- Supports ad-hoc and infrastructure mode
- Serial interface supports DTE speeds to 921.6K bps
- UFL antenna connector
- Two LED driver outputs for visual monitoring of link and activity
- Configuration and management via AT commands
- Flash memory to update firmware with the latest enhancements
- Developer's kit available for testing, programming and evaluation
- Two-year warranty

### Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

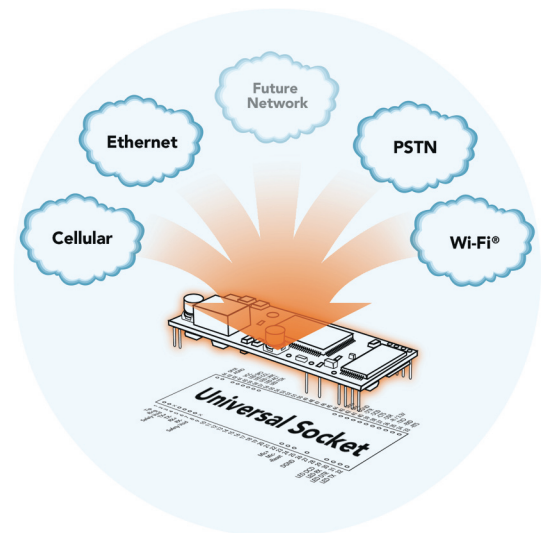

# Highlights

**Applications.** The SocketWireless Wi-Fi device server will wirelessly IP-enable any device to provide remote monitoring, control and configuration of any system. It is ideal for:


- Appliances
- Credit card and check verification systems
- Data collection
- Industrial and medical remote monitoring systems
- Point-of-sale terminals
- Remote metering
- Security systems
- Ticketing machines
- Vending/gaming machines

**Serial-to-Wi-Fi Technology** The SocketWireless Wi-Fi device server provides the powerful ability to IP-enable serial devices allowing more options for data acquisition, device management, and industrial control than would otherwise be available. The communications device integrates a processor, Multi-Tech's Universal IP stack, and an 802.11b/g wireless network connection to provide a complete serial-to-Wi-Fi connectivity solution.

**Universal Socket Connectivity.** Multi-Tech's Universal Socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

**Universal IP.** Multi-Tech's Universal IP consists of a common set of TCP/IP networking protocols and machine-to-machine (M2M) applications implemented using a standard AT command interface. Universal IP allows developers to write their host application one time while having the freedom to select from a growing number of Universal Socket communication devices.

**SocketWireless Wi-Fi Pin-Out.** The SocketWireless Wi-Fi device server interfaces easily with existing products through a standard serial communication channel. The serial DTE channel is capable of transfer speeds to 921.6K bps and can be interfaced directly to a UART or microcontroller. The SocketWireless Wi-Fi device server also provides two LED driver outputs for visual monitoring of link and activity.

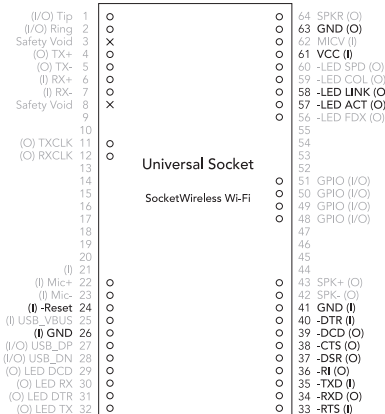

**Developer's Kit.** The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, universal power supply, antenna and RS-232 cable.

## Specifications

### Wireless Specifications

- Network Interface: IEEE 802.11b/g
- Frequency Range: 2.400 to 2.484 GHz
- Data Rate: Up to 54M bps
- Maximum Transmit Power: 15 dBm
- Receiver Sensitivity: -82 dBm
- Security: 64/128 bit WEP, WPA-PSK, WPA2, & WPA2-PSK
- Mode: Ad Hoc, Infrastructure
- Antenna Connector: UFL

### Serial Interface

- Data Format: Serial, asynchronous, 3.3V-level signals
- Data Rate: Software selectable (1200 bps – 921.6K bps)

### Power Requirements

- 3.3VDC or 5VDC

### Power Usage

- 3.3VDC; 57mA idle, 180mA typical, 260mA maximum
- 5VDC; 56mA idle, 193mA typical, 260mA maximum

### IP Protocols Supported

- ARP, DHCP client, DNS client, FTP client, ICMP (ping), POP3 client, SMTP client, TCP, & UDP client, Telnet server

### Physical Description

- 2.541" L x 1.045" W x 0.680" H; 0.6 oz.
- (6.45 cm x 2.65 cm x 1.7 cm; 0.017 kg.)

### Operating Environment

- Temperature Range: -30° to +70° C

### Approvals

- Safety: UL 60950-1, cUL 60950-1, EN 60950-1, IEC 60950-1
- EMC: FCC Part 15 Subpart C, Canada, RSS-210, EN 300 328, EN 301 489-17
- RoHS Compliant

## Ordering Information

Product	Description	Region
MT810SWM-IP	802.11b/g Device Server, 5V	Regional
MT810SWM-L-IP	802.11b/g Device Server, 3.3V	Regional

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

**Trademarks / Registered Trademarks:** SocketWireless, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / Wi-Fi is a registered trademark of the Wi-Fi Alliance. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

**World Headquarters**  
Tel: (763) 785-3500  
(800) 328-9717  
www.multitech.com

**EMEA Headquarters**  
Multi-Tech Systems (EMEA)  
United Kingdom  
Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)  
France  
Tel: +(33) 1 49 19 22 06

