

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



TRBLU24-00100

Embedded Bluetooth® HCI Module

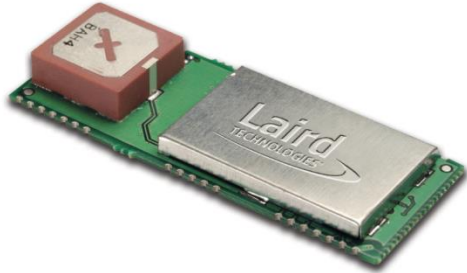

The Laird Embedded Bluetooth® Module is specifically designed for applications that demand a robust and reliable Bluetooth connection. This product is designed with solder connections that allow the module to be mounted directly into your own designs and potted or enclosed within metal housing while exposing a high performance multilayer ceramic antenna.

Key Features

- Integrated antenna with up to 300 meter range
- Option for external antenna via u.FL variant
- Class 1 with +6 dBm transmit power (maximum)
- Current consumption less than 30 mA
- Version 2.0+ EDR Bluetooth
- Data transfer rates up to 3 Mbps
- Industrial -40°C to +85°C operating range
- Optimized for Windows CE
- USB or optional UART (H4, H5, BCSP)
- Piconet and Scatternet support
- Adaptive Frequency Hopping
- Wi-Fi coexistence support
- Bluetooth-approved
- Designed for rugged applications and potting
- Lead free – RoHS compliant

Benefits

- Fastest time to market
- Excellent range
- Rugged design
- Low power consumption
- Low cost of ownership
- Embedded system design
- Optimized for Microsoft Windows CE
- Supports encrypted data
- Industrial design for surface mount applications
- Flat mounting solder down board
- Potable without detriment to performance
- Extensive technical support

global solutions: local support.

USA: +1.800.492.2320
Europe: +44.1628.858.940
Asia: +852.2268.6567

wirelessinfo@lairdtech.com
www.lairdtech.com/bluetooth


The Host Controller Interface (HCI) is optimized to work with the Microsoft Windows CE embedded protocol stack and supports other HCI compliant Bluetooth stacks including Microsoft Windows XP Service Pack 2 onwards. The interface allows the module access to the full range of features available from the Bluetooth version 2.0 specification from the CSR BlueCore BC4 chipset.



TRBLU24-00100

Embedded Bluetooth® HCI Module

FEATURE	IMPLEMENTATION
Bluetooth®	Class 1
Frequency	2.402 – 2.480 GHz
Max Transmit Power	+6 dBm
Low Power	Hold, Sniff, Park
Receive Sensitivity	Better than -84 dB
Range	300 m (free space)
Interface	HCI over USB or optional UART
Lead Free	RoHS compliant
Physical Size	17.7 mm x 46.0 mm x 5.0 mm, 8 g
Bluetooth Qualified	Bluetooth 2.0+EDR
Current Consumption	Less than 36 mA
Temperature Range	-40 °C to +85° C
Audio	SCO and eSCO supported
Piconet and Scatternet	Supported
Field Upgrades	Supported

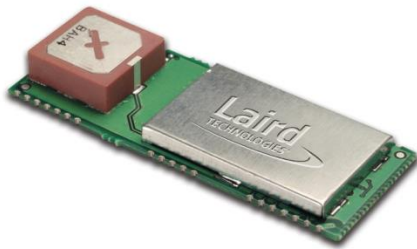

Ordering Information

TRBLU24-00100 Embedded Bluetooth HCI Module

TRBLU24-00100-NA Embedded Bluetooth HCI Module –uFL connector for external antenna

The details contained within the document are subject to change. Download the product specification from www.lairdtech.com/bluetooth for the most current specification.

LWS-DS-TRBLU24_0713

Any information furnished by Laird and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird materials rests with the end user since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability, or suitability of any Laird materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. For further information please visit our website at www.lairdtech.com. Alternatively contact wirelessinfo@lairdtech.com. Bluetooth® is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Laird.

© 2013 All Rights Reserved. Laird is a registered trademark of Laird, Inc.