

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

433MHz ASK/OOK Transmitter module

SKU: 317010005



(images/product/317010005 1.jpg)



(https://www.kickstarter.com/projects/seeed/wio-link-3-steps-5-minutes-build-your-iot-applicat/description?ref=banner_depot)

Description

RF-T-ASK series is a low cost, high output power, low power consumption ASK/OOK transmitter module with operating at 433MHz frequency. It is your ideal choice for designing long distance wireless data transmission products. Compliance FCC and ETSI regulation.

Features:

- Long Distance Application
- Simple-to-use.
- SAW Resonator •433MHz
- Data Rate:300Hz-10KHz
- RF Output Power: 16dBm@5V
12dBm@3.3V
- Power Supply: 2.1V~5.5V
- Low Power Consumption


Typical Application:

- Remote control
- Remote sensor
- Wireless data collection
- Home security system

• Toys

Transmitter Characteristics:

Parameter	Symbol	Condition	Condition			Unit
			min.	typ.	max.	
Operation Frequency	Ftx	Vcc=3.3V,TA-25V, 315MHz	314.90	315.00	315.10	MHz
		Vcc=3.3V,TA-25V, 433MHz	433.82	433.92	434.02	MHz
Output Power	Pmax	Vcc=3.3V, TA-25V, 315MHz and 433MHz	-	12	-	dBm
		Vcc=5.0V,TA-25V, 315MHz and 433MHz	-	16	-	
Supply current	Icc	Vcc=3.3V,TA-25V, 315MHz and 433MHz	-	24	-	mA
		Vcc=5V,TA-25V, 315MHz and 433MHz	-	40	-	
Standby Current	Isc	-	-	-	1	nA
Supply voltage Range	Vcc		2.1	-	5.5	V
Data Rate	DR		300		10K	bps

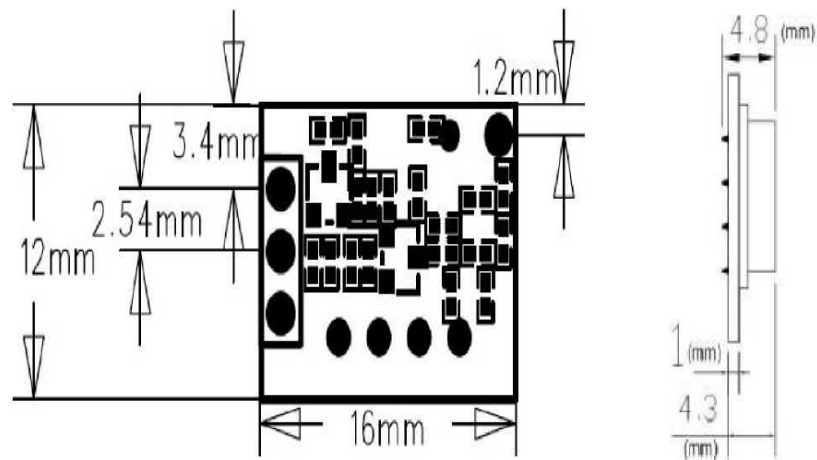Package Information:**Absolute Maximum Ratings:**

Parameter	Value	Units
Power Supply	2.2 ~ 5.5	V
Operating temperature	-20 to +70	V

Overview



(<http://www.seeedstudio.com/depot/Shenzhen-2U-t-11.html?ref=pinfo>)

(<http://www.seeedstudio.com/depot/Others-m-24.html?ref=pinfo>)

Weight: 2 g

Designer: Others
Other Products From
This Designer