


## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



## SMD METALLIZED FILM-OVER-FOAM GROUNDING CONTACT

Laird's SMD (Surface Mount Device) Grounding Contact is a foam cored contact with a metallized polyimide film outer covering. It is used for circuit grounding of SMT (Surface Mount Technology) devices. These contacts are designed to be solder reflow compatible, and are suitable for automatic processing.

### FEATURES

- Sn / Cu Plated PI Film outer layer
- Polymeric Foam Core
- Soft SMD contacts are RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Reflow tunnel compatible to 260° C
- Patent Pending
- UL94 HB Flammability Rating


### MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Automotive
- Laptop computers and tablets
- Networking equipment
- Desktop computers
- Telecommunications cabinets

Item	Unit	Value	Test Method
Z-Axis Resistance			Laird Internal
Before Reflow	Ω	<0.06	
After Reflow	Ω	<0.10	
Flammability		PASS	UL 94 HB*
Solder Adhesion Strength (Contact to PCB)	kgf	>0.8	Laird Internal
Hardness (Shore A)	durometer	<20	ASTM D 2240
Compression Set	%	<15	ASTM D3574 Test D
Operation Temperature	°C	-40° to 70°	
Restricted Substances		RoHS Compliant Halogen Free	

\* UL file number E170327, UL designation code HB 026


**Force/Displacement/Resistance Graph of Laird  
Soft SMD Contact (7 mm x 7 mm rectangle shape)**

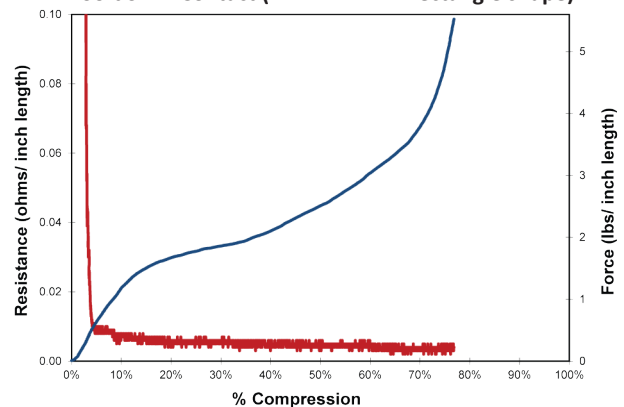


Americas: +1.800.323.3757  
LHP.Sales@lairdtech.com  
Europe: +46.8.555.722.00  
LHP.Sales@lairdtech.com  
Asia: +86.10.5933.3682  
LHP-ChinaSales@lairdtech.com

# Soft SMD Grounding Contacts Metallized Film-over-Foam


## PRODUCT COMPOSITION

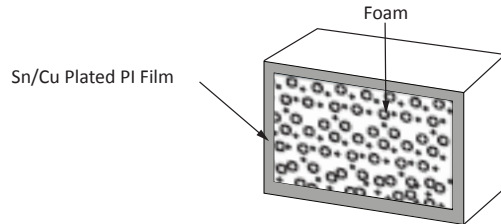


## PRODUCT APPLICATION

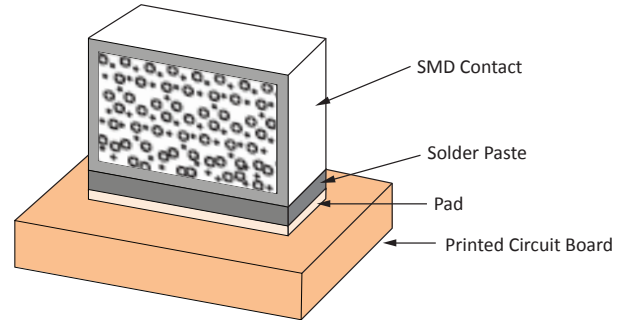

## PART NUMBER STRUCTURE

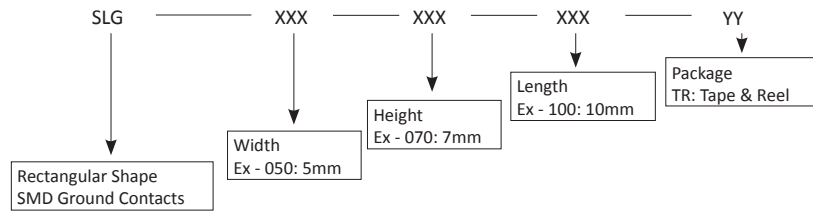

Example: "SLG-050-070-100-TR" for rectangular shape, 5mm in width, 7mm in height and 10mm length in Tape & Reel.

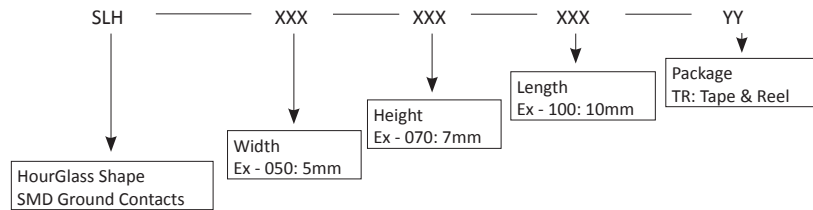

Example: "SLH-050-070-100-TR" for hourglass shape, 5mm in width, 7mm in height and 10mm length in Tape & Reel.

## TYPICAL REFLOW CONDITIONS

	Temperature Profile	Condition	
		Temperature	Time
A	Preheating Stage	Room Temp. -170°C	125 sec.
B	Heating / Soaking Stage	170-217°C	100 sec.
C	Reflow Stage	217-Peak Temp. (~260°C Max)	50 sec.
D	Cooling Stage	Peak Temp. - Room Temp.	>60 sec.

Product is available in tape and reel packaging

Values presented have been determined by standard test methods and are typical values not to be used for specification purposes.

EMI-DS-FOF-SOFT-SMD 070215

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.