

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



ECOFOAM™ CONDUCTIVE FOAM

Laird's Ecofoam™ offers an innovative approach to traditional shielding and grounding by providing X, Y and Z-axis conductivity, enhancing the shielding effectiveness required to meet the increasing microprocessor speeds of today's computer, telecommunications and other electronic equipment. The product is offered with a conductive PSA tape on one side. Ecofoam™ can be customized to your application by die-cutting, hole-punching, notching, and so on and is especially useful for odd-shaped applications which are difficult to shield with typical profile gaskets. Ecofoam™ is designed for low-cycling applications such as input/output (I/O) shielding and other non-shear standard connectors.

FEATURES




- RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Excellent z-axis conductivity to provide effective EMI shielding and grounding
- Low compression forces allow for use of lighter materials
- Conductive PSA on one side

MARKETS

- Servers
- Cabinet Applications
- Network and Telecommunication Equipment
- LCD and Plasma TV
- Medical Equipment
- Desktop Computers
- Printers
- Laptop Computers
- Tablets and Smartphones


ECOFOAM™ 500-SERIES (WITH CPSA TAPE)	
Thickness	Designation
0.3 mm	CF503
0.5 mm	CF505
0.7 mm	CF507
1.0 mm	CF510
1.5 mm	CF515
2.0 mm	CF520
2.5 mm	CF525
3.0 mm	CF530
3.5 mm	CF535
4.0 mm	CF540

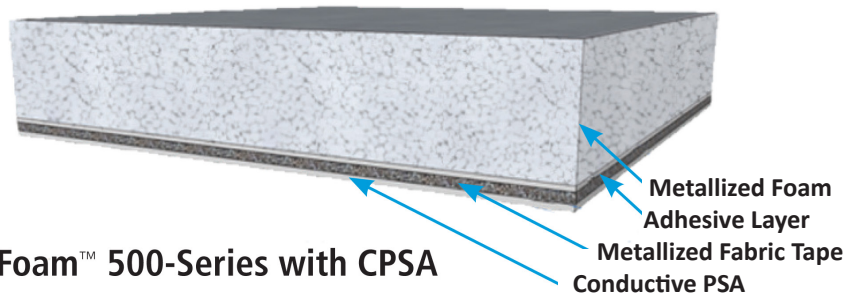


EcoFoam™ 500-Series with CPSA

USA: +1.866.928.8181
Europe: +49.0.8031.2460.0
Asia: +86.755.2714.1166

FORCE/DISPLACEMENT/RESISTANCE (FDR)

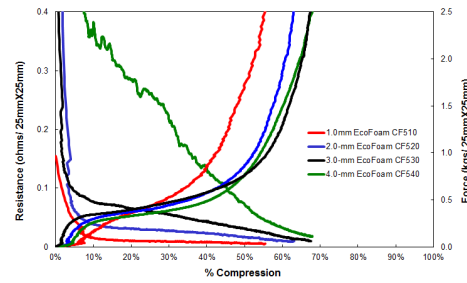

SHIELDING EFFECTIVENESS

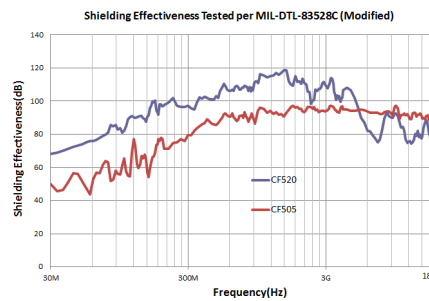

ITEM	UNIT	VALUE	TEST METHOD
Thickness	mm (±0.2 mm) mm (±0.5 mm)	0.3, 0.5, 0.7 1.0, 1.5, 2.0, 2.5, 3.0, 4.0	-
Z-Axis Resistance*	Ω	<0.2	Laird Internal
Shielding Effectiveness			MIL-DTL-83528C (modified)
300 MHz	dB	87 average	
3 GHz	dB	108 average	
18 GHz	dB	78 average	
Compression Set	%	< 30	ASTM D3574
Foam Density	kg/m ³	30 ±5	-
Operation Temperature	°C	-40 to 85	
Hazardous Substance		Compliant with RoHS (Directive 2002/95/EC) Halogen-free per IEC-61249-2-21 Standard	
Shelf Life		12 months at 23°C/ 60% R.H.	

*25mm x 25mm Test Sample, 1000 gf loading

Values presented have been determined by standard test methods and are typical values not to be used for specification purposes.

ORDERING INFORMATION

PART NUMBER EXAMPLE

Digits:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	C	F	5	2	0	A	A	0	1	0	5	0	2	0	0
	PRODUCT NAME (CF500/CF600/CF700 series) EX: CF520					SITE ENG CODE: this is defined by site eng team (refer to "SITE ENG CODE" sheet) AA, AB, AC...A9 etc		PRODUCT WIDTH(WIDEST) EX: 0105=10.5mm			PRODUCT LENGTH (LONGEST) EX: 0200=20.0mm EX: 020M=2.0m (if the part length is over 999.9mm, please define digit #15 as m[meter])				

EMI-DS-FOF-ECOFOAM-500_060215

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc. or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.