

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

HF Mid Range Reader ID ISC.MR102



FEATURES

- Compact Multitag Reader for various applications
- Anticollision function
- Numerous communication interfaces: Ethernet (TCP/IP), USB, RS232, RS485
- Available as module or housing version
- 3 different reader modes
- Compatible with the previous version ID ISC.MR101
- Ideal for retail, industry, logistics and libraries



ID ISC.MR102


DESCRIPTION

The HF Mid Range Reader ID ISC.MR102 identifies transponders according to ISO 15693 with an operating frequency of 13,56 MHz. The reader is suitable for applications with middle read ranges. Depending on the used antenna the ID ISC.MR102 has a read range up to 40 cm.

Due to its numerous communication interfaces the HF Mid Range Reader ID ISC.MR102 is suitable to be used in fields of applications like library, retail, logistics and industry and is easy to integrate in existing systems.

With its anticollision function the ID ISC.MR102 is able to read up to 30 transponders simultaneous. A switchable DC voltage at the antenna output can supply a LED inside a connected antenna.

Depending on the interface the ID ISC.MR102 is available as module or housing version. For the housing version the electronic is mounted inside a solid plastic housing which could be used in industrial environments.

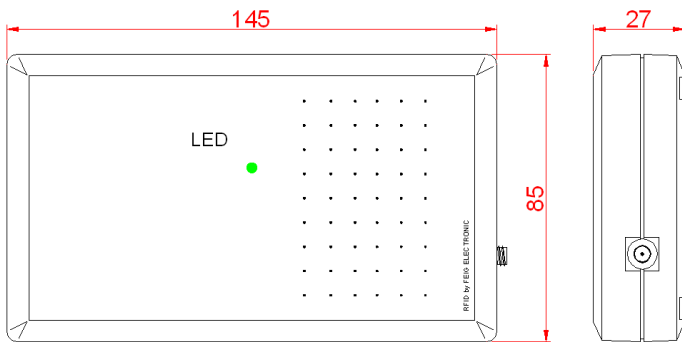

ORDER DESCRIPTION

ID ISC.MR102-A	Housing version; RS232 asynchr.
ID ISC.MRM102-A	Module version; RS232 asynchr.
ID ISC.MR102-B	Housing version; RS485 asynchr.
ID ISC.MR102-PoE	Housing version; Ethernet (PoE)
ID ISC.MR102-USB	Housing version; USB 2.0
ID ISC.MRM102-USB	Module version; USB 2.0

TECHNICAL DATA

Dimensions (W x H x D)	85 mm x 145 mm x 31 mm (3,3 inch x 5,7 inch x 1,2 inch)
Weight	200 g
Housing	Plastic ABS
Enclosure rating	IP 30
Colour	similar to RAL 9018 (Papyrus white)
Operating frequency	13,56 MHz
Transmitting power	1,2 W ± 1 dB
Power supply	
- ID ISC.MR102-A/-B/-USB	12...24 V DC
- ID ISC.MR102-PoE	12...24 V DC or PoE
Power consumption	max. 6 W
Antenna connector	1 x SMA connector (50 Ω)
Supply voltage at antenna output	7,5 V DC (max. 5 mA)
Interfaces	
- ID ISC.MR102-A	RS232
- ID ISC.MR102-B	RS485
- ID ISC.MR102-PoE	Ethernet (TCP/IP)
- ID ISC.MR102-USB	USB 2.0
Indicators, optical	1 LED (multicolour)
Supported transponders	ISO 15693 (ISO 18000-3 MODE 1)*
Reader modes	ISO Host Mode, Scan Mode, Notification Mode
Others	Antenna shortcut detection Temperature control Full support of the external multiplexer ID ISC.ANT.MUX
Temperature range	
Operation	-25 °C up to 55 °C (-13 °F up to 131 °F)
Storage	-25 °C up to 85 °C (-13 °F up to 185 °F)
Relative humidity	5...95 % (non-condensing)

* e.g. EM HF ISO Chips, Fujitsu HF ISO Chips, IDS Sensor Chips, Infineon my-d, KSW Sensor Chips, NXP I-Code, STM ISO Chips, TI Tag-it

STANDARD CONFORMITY

Radio license	
Europe	EN 300 330
USA	FCC 47 CFR Part 15
Canada	IC RSS-GEN, RSS-210
EMC	EN 301 489
Safety	
Low voltage	EN 60950
Human exposure	EN 50364
Vibration	EN 60068-2-6 10...150 Hz: 0,075 mm / 1 g
Shock resistance	EN 60068-2-27 Acceleration: 30 g

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: February 2011.