

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

10GBase-T Magnetics Modules

Designed to Support 10GBase-T
Transceivers

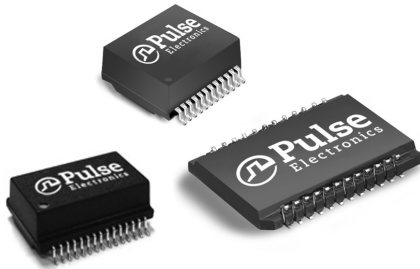

- Compliant with IEEE 802.3 standard
- Qualified with top 10Gig PHY Manufacturer
- RoHS peak reflow temperature rating: 245°C
- Low profile package for PCI Express
- Fine-tune magnetics to specific PHY vendors

Electrical Specifications @ 25°C - Operating Temperature 0°C to 70°C

RoHS Compliant Part Number	Channel Option	Insertion Loss (dB or better)		Return Loss (dB or better)		Common to Differential Mode Rejection (dB or better)		Crosstalk (dB or better)		Hipot (Vrms MIN)	MSL
		100 kHz	1-500 MHz	1-40 MHz	40-500 MHz	1-250 MHz	250-500 MHz	1-100 MHz	100-500 MHz		
H7019NL	4	-3.0	-1.0 (-0.6 dB TYP)	-18	-17+ 10* LOG (f/40)	-30	-22	-40	-30	1500	1
H7028NL	4	-3.0	-1.0 (-0.6 dB TYP)	-18	-17+ 10* LOG (f/40)	-30	-22	-40	-30	1500	1
H7029NL	4	-3.0	-1.0 (-0.6 dB TYP)	-18	-17+ 10* LOG (f/40)	-30	-22	-40	-30	1500	1
HX7028NL ¹	4	-3.0	-1.0 (-0.6 dB TYP)	-18	-17+ 10* LOG (f/40)	-30	-22	-40	-30	1500	1
H7800NL	4	-3.0	-1.0 (-0.6 dB TYP)	-18	-17+ 10* LOG (f/40)	-30	-22	-40	-30	1500	1
H7037NL	5	-3.0	-1.0 (-0.6 dB TYP)	-23	-23+ 10* LOG (f/40)	-40	-25	-40	-25	1500	1
H7137NL	5	-3.0	-1.0 (-0.6 dB TYP)	-23	-23+ 10* LOG (f/40)	-40	-25	-40	-25	1500	1



Notes:

1. Extended Operating temperature (-40°C to +85°C)

Note: When ordering Tape & Reel packaging, add a "T" suffix at the end of the part number, e.g. H7137NLT.

Mechanical

H7019NL, H7028NL, H7029NL, HX7028NL

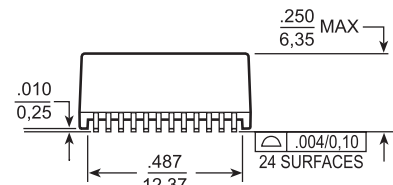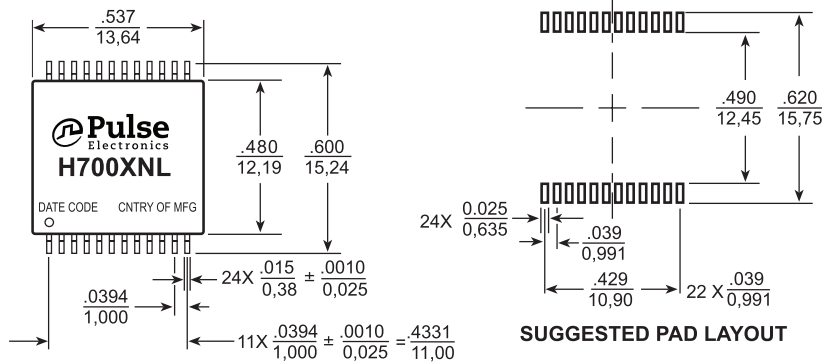

Weight1.2 grams
Tube35

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768


10GBase-T Magnetics Modules

Designed to Support 10GBase-T
Transceivers



Mechanicals


H7800NL

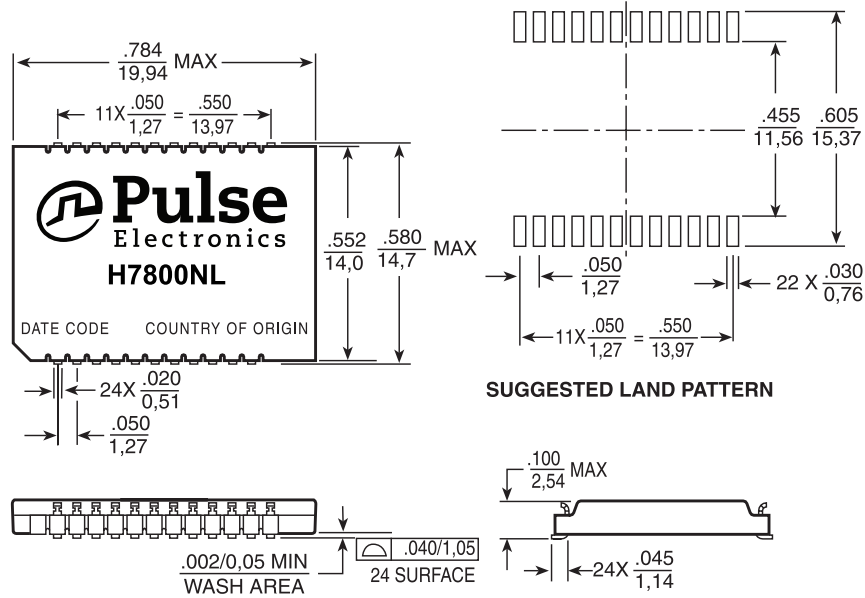

Weight1.0 grams
 Tape & Reel700
 Tube20

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

H7037NL, H7137NL

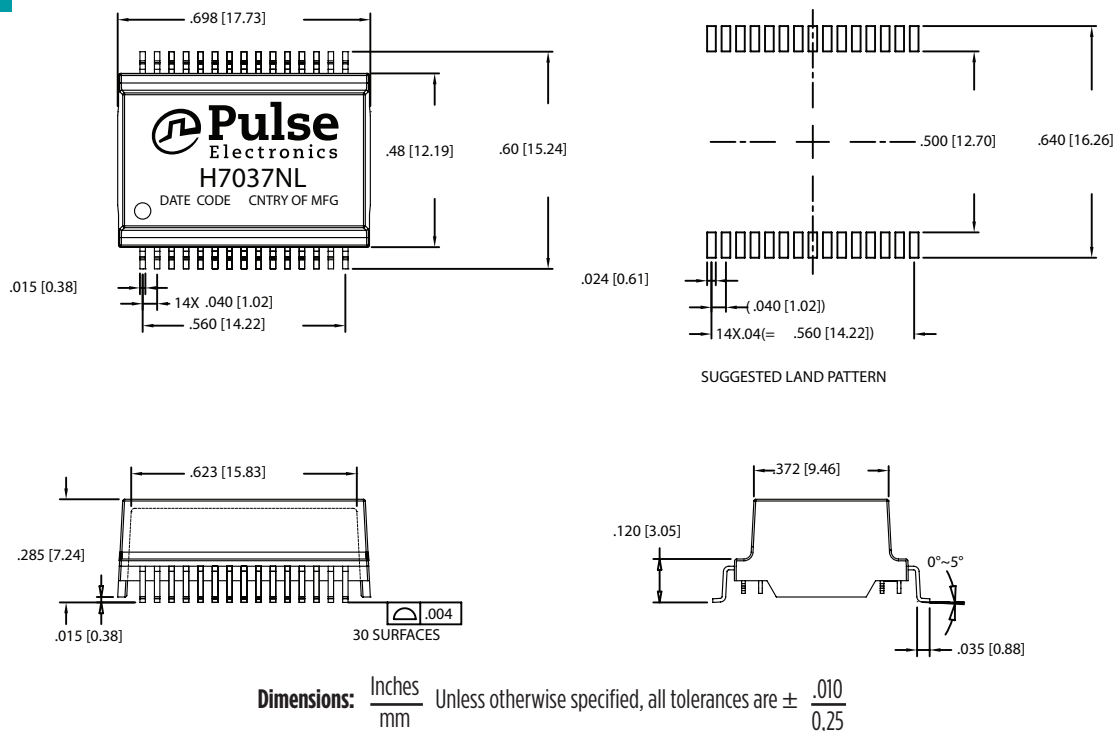



10GBase-T Magnetics Modules

Designed to Support 10GBase-T
Transceivers

Schematics

H7019NL, H7028NL, H7029NL, HX7028NL

H7037NL, H7137NL

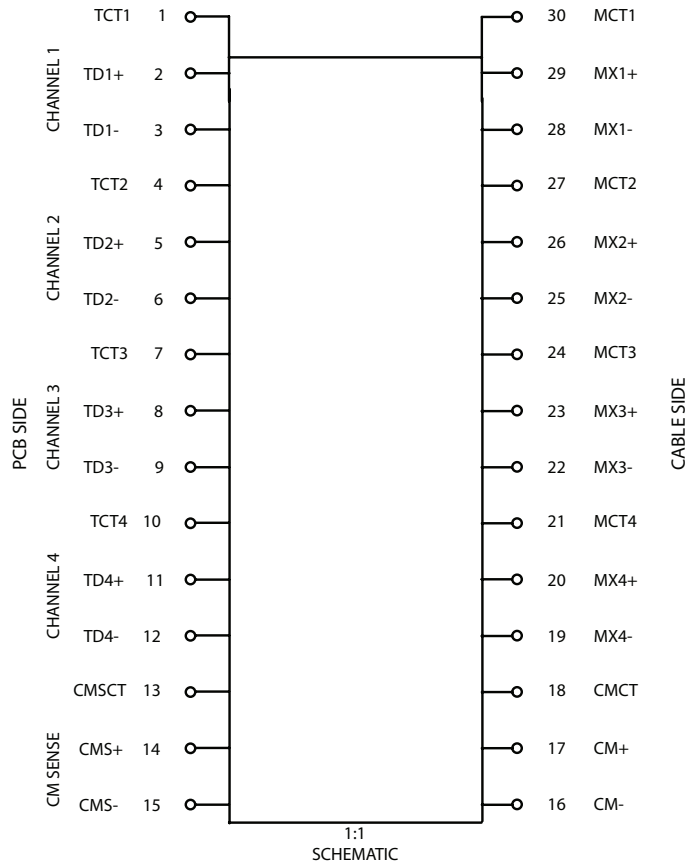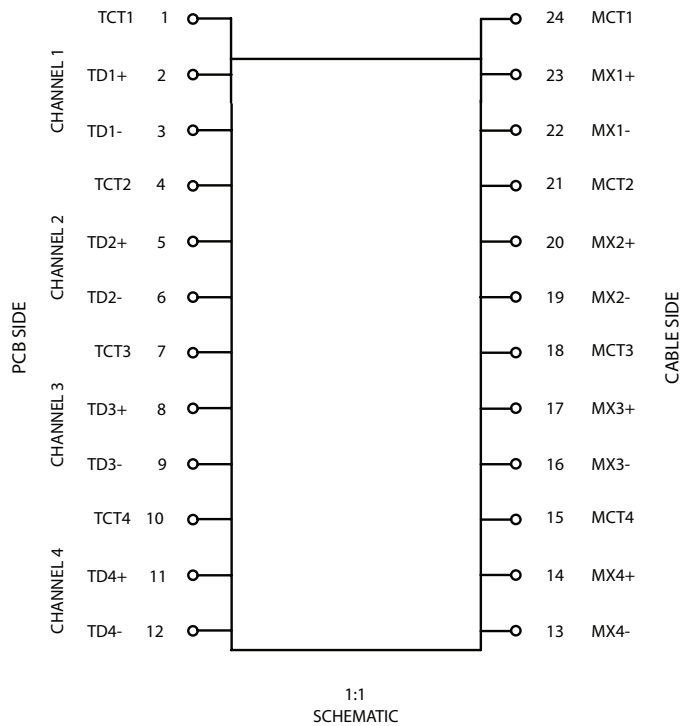

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823
(Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.