

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# Axial Lead and Cartridge Fuses

Midget

## 250 Vac / 125 Vdc Slow-Blo Type Fuse FLM Series

PS UL SP QPL

### ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Ampere Rating	Opening Time
135%	1/10-30	1 hour, <b>Maximum</b>
	32/10-30	12 seconds, <b>Minimum</b>
200%	0-3	5 seconds, <b>Minimum</b>


**VOLTAGE RATINGS:** 250 Vac  
125 Vdc self-certified @ 10 kA

**INTERRUPTING RATING:** 10,000 amperes at 250 Vac

**AGENCY APPROVALS:** UL Listed (File:E10480)  
CSA Certified (029862\_0\_000)

### ORDERING INFORMATION:

Cartridge Catalog Number	Ampere Rating	AC Voltage Rating	Nominal Resistance Cold Ohms
FLM 1/10	.100	250	188.0
FLM 15/100	.150	250	87.0
FLM 2/10	.200	250	35.109
FLM 1/4	.250	250	16.82
FLM 3/10	.300	250	6.739
FLM 4/10	.400	250	5.413
FLM 1/2	.500	250	3.79
FLM 6/10	.600	250	2.05
FLM 8/10	.800	250	1.024
FLM 1	1	250	1.024
FLM 1 1/8	1.125	250	.6231
FLM 1 1/4	1.25	250	.6231
FLM 1 4/10	1.4	250	.395
FLM 1 1/2	1.5	250	.339
FLM 1 6/10	1.6	250	.286
FLM 1 8/10	1.8	250	.253
FLM 2	2	250	.2191
FLM 2 1/4	2.25	250	.184
FLM 2 1/2	2.5	250	.162
FLM 2 9/10	2.8	250	.125
FLM 3	3	250	.102
FLM 3 1/10	3.2	250	.0904
FLM 3 1/2	3.5	250	.0735
FLM 4	4	250	.0400
FLM 4 1/2	4.5	250	.0561
FLM 5	5	250	.0413
FLM 5 6/10	5.6	250	.0326
FLM 6	6	250	.0280
FLM 6 1/4	6.25	250	.0277
FLM 7	7	250	.02133
FLM 8	8	250	.01247
FLM 9	9	250	.01066
FLM 10	10	250	.00903
FLM 12	12	250	.00698
FLM 15	15	250	.00530
FLM 20	20	250	.00385
FLM 25	25	250	.00275
FLM 30	30	250	.00226

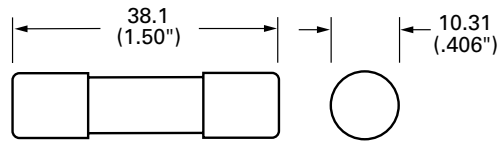

Average Time Current Curves

