

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

LVSP SURGE SUPPRESSION FUSE

600 Vac • 5-100 kA



Description

The Littelfuse® Varistor Protection (LVSP) Fuses are intended for the protection of TVSS products. The LVSP series has been designed to survive the 8 x 20 μs lightning surges described in various standards (UL 1449, IEC 61000-4-5 and IEEE C62.41) without opening. This allows the TVSS to perform the necessary suppression. The LVSP is not rated for continuous current and the ratings are specific 8 x 20 μs surge capability. The LVSP series can be used to facilitate TVSS module compliance to UL 1449 in permanently connected applications (abnormal overvoltage, unlimited current conditions).

Features/Benefits

- Very current limiting under AC short-circuit conditions
- Available in multiple mounting configurations (cartridge, bolt-in, PC board mount)
- Provides short circuit protection in TVSS systems and complements the Littelfuse line of overvoltage products (HA, HB34, TMOV® and iTMOV® varistors as well as the AK-10 series TVS diodes)

Applications

- TVSS products
- Surge arrestors


Electrical Specifications

SURGE RATING	RATING CODE	VOLTAGE RATING (A)	INTERRUPT RATING (kA)	CARTRIDGE		LEADED		BOLT-IN		8 X 20 μS SURGE RATING	NOMINAL MELTING I ² T (A ² S)	NOMINAL CLEARING I ² T (A ² S)	I _{peak} @100 kHz (A)
				CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER				
5	0005	600	200	LVSP5-2	LVSP0005TX2	LVSP5-R	LVSP0005TXR	-	-	5,000	359	981	3,700
10	0010	600	200	LVSP10-2	LVSP0010TX2	LVSP10-R	LVSP0010TXR	-	-	10,000	1,300	3,210	5,823
15	0015	600	200	LVSP15-2	LVSP0015TX2	LVSP15-R	LVSP0015TXR	-	-	15,000	3,267	6,235	7,765
20	0020	600	200	LVSP20-2	LVSP0020TX2	LVSP20-R	LVSP0020TXR	-	-	20,000	4,940	11,710	8,135
30	0030	600	200	LVSP30-2	LVSP0030TX2	-	-	LVSP30	LVSP0030T	30,000	11,950	35,325	12,478
40	0040	600	200	LVSP40-2	LVSP0040TX2	-	-	LVSP40	LVSP0040T	40,000	20,550	61,700	15,250
60	0060	600	200	LVSP60-2	LVSP0060TX2	-	-	LVSP60	LVSP0060T	60,000	39,240	145,555	19,604
80	0080	600	200	LVSP80-2	LVSP0080TX2	-	-	LVSP80	LVSP0080T	80,000	75,000	254,000	24,600
100	0100	600	200	-	-	-	-	LVSP100-L	LVSP0100VXL	100,000	Contact Factory		

Specifications

Voltage Rating	600 Vac
Interrupting Rating	200 kA
Ratings	5 – 100 kA 8 x 20 μs surge withstand
Approvals	UL Recognized (File: E71611)
Environmental	RoHs Compliant

Part Numbering System

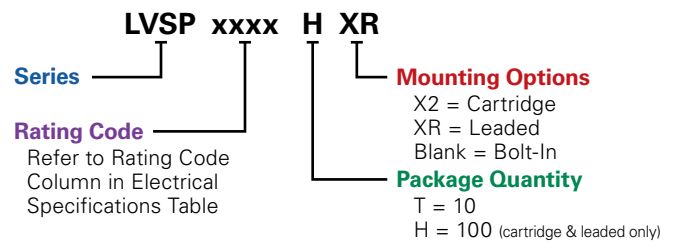

SERIES	SURGE RATING	RATING CODE	PACKAGE QUANTITY	MOUNTING METHOD	CATALOG NUMBER	ORDERING NUMBER
LVSP	5	0005	10	CARTRIDGE	LVSP05-2	LVSP0005TX2
LVSP	15	0015	10	CARTRIDGE	LVSP15-2	LVSP0015TX2
LVSP	20	0020	100	LEADED	LVSP20-R	LVSP0020HXR
LVSP	80	0080	10	BOLT-IN	LVSP80	LVSP0080T

Recommended Fuse Blocks

- LVSP (5-20)-2**
L60030M (open block) • LFPSM (dead front)
- LVSP (30-80)-2**
LFJ60030 (open block) • LFPSJ30 (dead front)
- LVSP (100)**
LFJ60100 (open block)


Web Resources

Download other technical information:
littelfuse.com/lvsp


LVSP SURGE SUPPRESSION FUSE

Dimensions Inches (mm)


Cartridge 5-20 A




Leaded 5-20 A

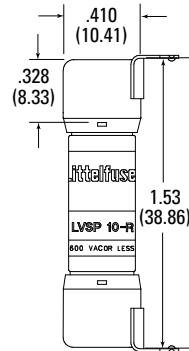

Cartridge 30-80 A

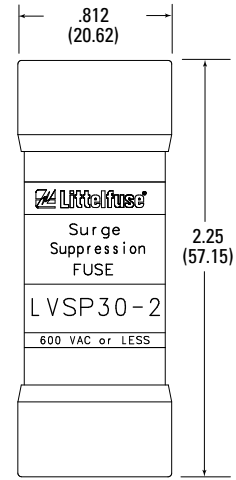

Bolt-In 30-80 A

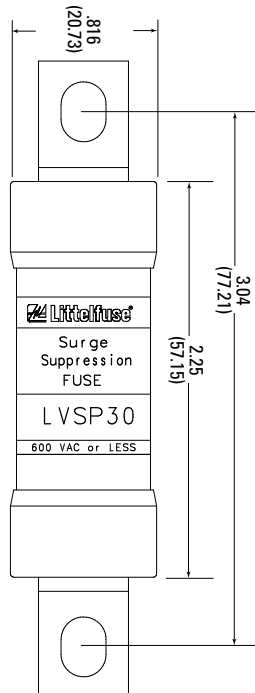

Bolt-In 100 A

