

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 10.3 x 38 mm, Super-Time-Lag TT, 250 VAC



NF C 93-435 · 250 VAC · Super-Time-Lag TT



NNO

Description

- Low Breaking Capacity

Standards

- NF C 93-435 - Modell HA29


References

This type is Phase-out without alternate type
Last order date: 31.12.2012


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	125 - 250 VAC
Rated current	1.6 - 50 A
Breaking Capacity	300 A - 500 A
Characteristic	Super-Time-Lag TT
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 55 °C
Climatic Category	40/055/56 acc. to IEC 60068-1
Material: Terminals	Nickel-Plated Copper Alloy
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper
Unit Weight	9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 , HA29, Rated current, Characteristic


Dimension

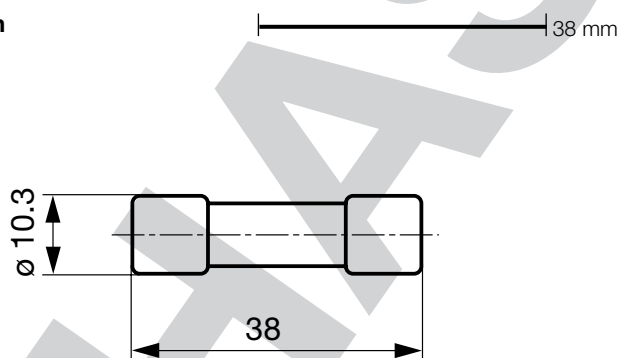

Pre-Arcing Time

Rated Current In	1.1 x In min.	1.45 x In max.	3.0 x In min.	3.0 x In max.	5.0 x In min.	5.0 x In max.
1.6 A - 6.3 A	60 min	60 min	4 s	9 s	500 ms	4 s
8 A - 50 A	60 min	60 min	4 s	20 s	2 s	6 s

Time-Current-Curves

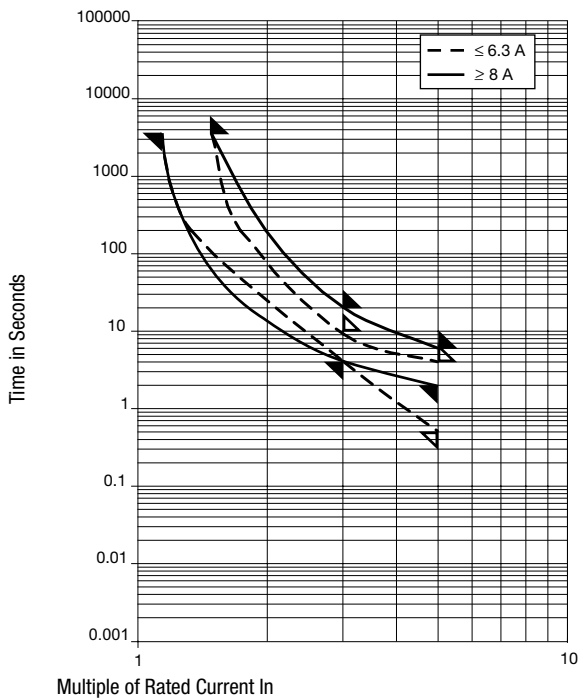

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Order Number
0.2	250	1)	1700	● 7037.1110
0.31	250	1)	650	● 7037.1120
0.4	250	1)	840	● 7037.1130
0.5	250	1)	680	● 7037.1140
0.63	250	1)	490	● 7037.1150
1	250	1)	365	● 7037.1170
1.25	250	1)	310	● 7037.1210
1.6	250	1)	620	● 7047.1110
2.5	250	1)	430	● 7047.1220
3.15	250	1)	295	● 7047.1230
4	250	1)	250	● 7047.1240
5	250	1)	200	● 7047.1250
6.3	250	1)	190	● 7047.1260
8	250	1)	200	● 7047.1270
10	250	1)	160	● 7047.1280
12.5	250	1)	160	● 7047.1290
15	250	1)	110	● 7047.1310
20	250	1)	95	● 7047.1330
25	250	1)	80	● 7047.1340
30	125	1)	75	● 7047.1350
40	125	-	50	● 7047.1410
45	125	-	55	● 7047.1420
50	125	-	45	● 7047.1430

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 300 A @ 50 VAC , p.f. ≥ 0.9 / 500 A @ 125 VAC , p.f. = 0.7 - 0.8

Packaging Unit Small Box Pack (10 pcs.)