

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 5 x 20 mm, Quick-Acting F, NF, 220 VAC



NF C 93-435 · 220 VAC · Quick-Acting F



Description

- Low Breaking Capacity

Standards

- NF C 93-435 - Model HA21
- Contrôle de Conformité de Qualité (CCQ)

Approvals

- Approval Reference Type: D1

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

Rated Voltage	32 - 220 VAC
Rated current	0.02 - 20 A
Breaking Capacity	60 A - 300 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1.2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	HA21, Rated current

Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension




Pre-Arcing Time

Rated Current I_n 1.15 x I_n min. 1.65 x I_n max. 3.0 x I_n max.

0.02 A - 6.3 A	60 min	60 min	200 ms
----------------	--------	--------	--------


Time-Current-Curves

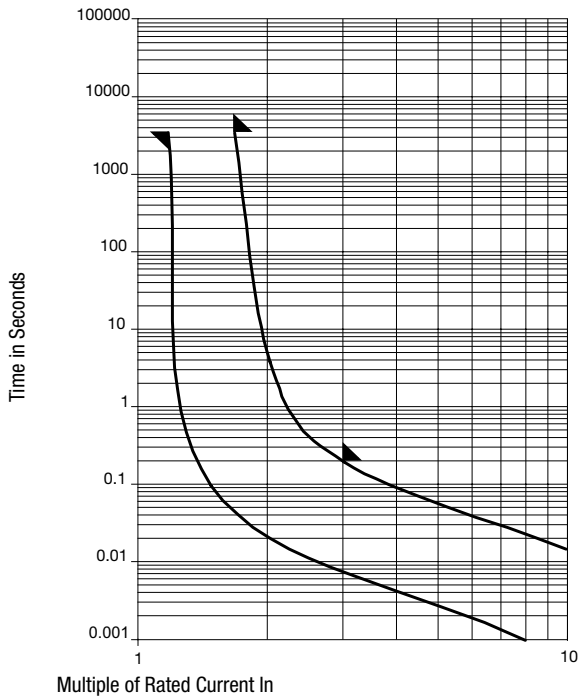

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting I ² t 10.0 Intyp. [A ² s]	Order Number
0.02	220	1)	790	21	0.00027	7010.3110
0.031	220	1)	1400	60	0.00029	7010.3120
0.04	220	1)	2400	155	0.00017	7010.3130
0.05	220	1)	3300	260	0.00017	7010.3140
0.063	220	1)	2250	220	0.00046	7010.3150
0.08	220	1)	1750	215	0.0012	7010.3160
0.1	220	1)	1200	175	0.003	7010.3210
0.125	220	1)	1550	295	0.0037	7010.3220
0.16	220	1)	1300	320	0.0076	7010.3230
0.2	220	1)	1200	375	0.012	● 7010.3240
0.25	220	1)	1000	400	0.025	● 7010.3250
0.31	220	1)	475	225	0.018	● 7010.3260
0.4	220	1)	310	185	0.054	● 7010.3270
0.5	220	1)	285	215	0.096	● 7010.3280
0.63	220	1)	310	300	0.14	● 7010.3290
0.8	220	1)	270	335	0.3	● 7010.3310
1	220	1)	150	215	0.81	● 7010.3410
1.25	220	1)	325	660	0.47	● 7010.3420
1.6	125	2)	300	790	0.93	● 7010.3430
2	125	2)	185	560	1.9	● 7010.3440
2.5	125	2)	285	1250	2.5	● 7010.3450
3.15	125	2)	145	670	7.1	● 7010.3460
4	125	2)	165	1050	10	● 7010.3470
5	125	2)	165	1300	18	● 7010.3480
6.3	125	2)	130	1200	41	● 7010.3510
8	32	3)	120	1400	79	● 7010.3520
10	32	3)	120	1750	145	● 7010.3530
12.5	32	3)	115	2000	300	● 7010.3620



Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting I ² t 10.0 Intyp. [A ² s]	 GAM T1 NNO	Order Number
15	32	3)	125	2750	460		7010.3630
20	32	3)	95	2600	1800		7010.3650

 Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) 60 A @ 220 VAC , p.f. = 0.6 - 0.8
- 2) 300 A @ 125 VAC , p.f. ≥ 0.95 / Schurter: 60 A @ 220 VAC
- 3) 300 A @ 32 VAC , p.f. ≥ 0.95

Packaging Unit Small Box Pack (10 pcs.)