

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 5 x 20 mm, Time-Lag T, L, 250 VAC



IEC 60127-2 · 250VAC · Time-Lag T



Description

- IEC Standard Fuse
- L = Low Breaking Capacity (Glass Tube)

Standards

- IEC 60127-2/3
- UL 248-14
- CSA C22.2 no. 248.14
- Telcordia GR-1089
- UL 60950 / IEC 60950
- ITU-T K.20 and K.21
- TIA-968-A

Approvals

- Approval Reference Type: FST 5x20
- VDE Certificate Number: 40016601
- UL File Number: E41599

Applications

- Primary Protection in Equipment

References


Pigtail Type [FST 5x20 Pigtail](#)
Assembled Fuseholder [OGN-SMD](#)
Fuse Kit [Fuse Kit FST 5x20](#); [Fuse Kit FST 5x20 / SP 5x20](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


[Application Note Primary Protection in Equipment](#) with further information on increased [Pulse Strength](#) and their test conditions according to international standards see [Impulse Withstand Voltage](#)

Technical Data

Rated Voltage	250 VAC
Rated current	0.05 - 20 A
Breaking Capacity	35 A - 200 A
Characteristic	Time-Lag T
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/21 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 , Rated current, Rated Voltage, Characteristic, Breaking Capacity, Approvals

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


Dimension [mm]

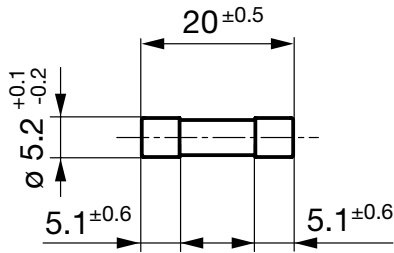

Pre-Arcing Time

Rated Current I _n	1.5 x I _n min.	2.1 x I _n max.	2.75 x I _n min.	2.75 x I _n max.	4.0 x I _n min.	4.0 x I _n max.	10.0 x I _n min.	10.0 x I _n max.
0.05 A - 0.1 A	60 min	120 s	200 ms	10 s	40 ms	3 s	10 ms	300 ms
0.125 A - 6.3 A	60 min	120 s	600 ms	10 s	150 ms	3 s	20 ms	300 ms
8 A - 20 A	30 min	120 s	600 ms	10 s	150 ms	3 s	20 ms	300 ms

Time-Current-Curves

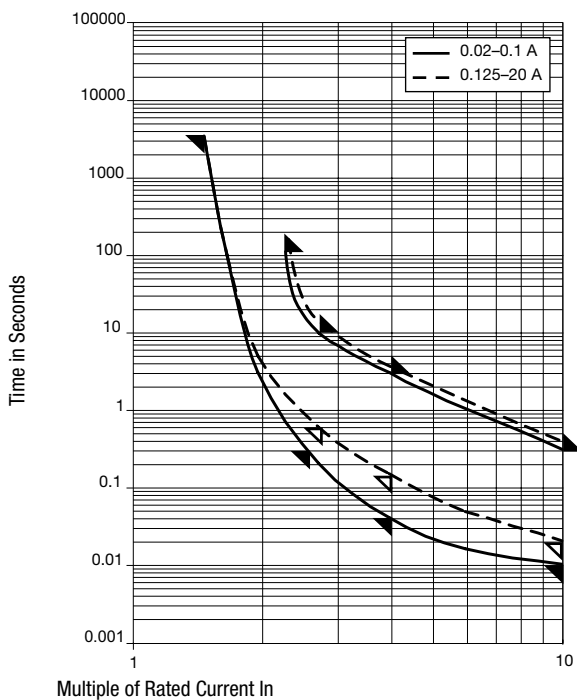

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n max. [mV]	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.5 I _n max. [mW]	Power Dissipation 1.5 I _n typ. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]		Order Number
0.05	250	1)	3500	950	1600	125	0.0363	● ● ● ● ●	0034.3104
0.063	250	1)	3000	1300	1600	200	0.0401	● ● ● ● ●	0034.3105
0.08	250	1)	3000	1100	1600	300	0.057	● ● ● ● ●	0034.3106
0.1	250	1)	2500	565	1600	155	0.107	● ● ● ● ●	0034.3107
0.125	250	1)	2000	400	1600	200	0.064	● ● ● ● ●	0034.3108

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n max. [mV]	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.5 I _n max. [mW]	Power Dissipation 1.5 I _n typ. [mW]	Melting I ² t 10.0 Intyp. [A ² s]							Order Number
0.16	250	1)	1900	415	1600	185	0.23	●		●		●		0034.3109
0.2	250	1)	1500	270	1600	200	0.256	●		●		●		0034.3110
0.25	250	1)	1300	210	1600	200	0.238	●		●		●		0034.3111
0.315	250	1)	1100	170	1600	200	0.544	●		●		●		0034.3112
0.4	250	1)	1000	150	1600	200	0.768	●		●		●		0034.3113
0.5	250	1)	900	160	1600	200	3	●		●		●		0034.3114
0.63	250	1)	300	160	1600	300	4.35	●		●		●		0034.3115
0.8	250	1)	250	120	1600	300	3.85	●		●		●		0034.3116
1	250	1)	150	60	1600	200	3.3	●		●	●	●		0034.3117
1.25	250	1)	150	60	1600	300	5.5	●		●	●	●		0034.3118
1.6	250	1)	150	60	1600	300	10.5	●		●	●	●		0034.3119
2	250	1)	150	60	1600	300	16	●		●	●	●		0034.3120
2.5	250	1)	120	60	1600	400	21.9	●		●	●	●		0034.3121
3.15	250	1)	100	60	1600	500	47	●		●	●	●		0034.3122
4	250	2)	100	60	1600	800	68.3	●		●	●	●		0034.3123
5	250	2)	100	60	1600	900	102	●		●	●	●		0034.3124
6.3	250	2)	100	60	1600	1000	190	●		●	●	●		0034.3125
8	250	2)	100	60	4000	1300	275	●		●	●	●	●	0034.3126
10	250	2)	100	60	4000	1300	520	●		●	●	●	●	0034.3127
12.5	250	2)	-	60	-	2500	750		●	●	●	●	●	0034.3128
16	250	2)	-	60	-	3300	1638		●	●	●	●	●	0034.3129
20	250	2)	-	60	-	4200	3057			●	●	●	●	0034.3130

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 35 A @ 250 VAC

2) 10 x I_n @ 250 VAC

Packaging Unit	xxxx.xxxx	Small Box Pack (10 pcs.)
	xxxx.xxxx.G	Bulk 128 x 91 x 60 mm (1000 pcs.)