

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 6.3 x 32 mm, Super-Quick-Acting FF, 500 VAC



UL 248-14 · 500 VAC · Super-Quick-Acting FF



#### Description

- High breaking capacity
- Current ratings above 12.5 A not China-RoHS compliant

#### Standards

- UL 248-14

#### Approvals

- Approval Reference Type: A12FA
- UL File Number: E132506

#### Applications

- Semiconductor protection
- Test equipment

#### Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

#### Technical Data

Rated Voltage	500 VAC
Rated current	0.1 - 12.5 A
Breaking Capacity	10 kA - 150 kA
Characteristic	Super-Quick-Acting FF
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Tube	Ceramic
Unit Weight	3 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Rated current, Rated Voltage, Approvals

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

#### Dimension [mm]

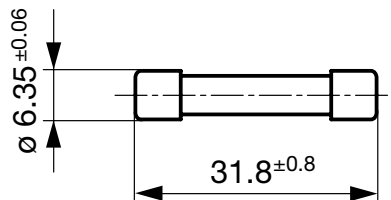


#### Pre-Arcing Time

Rated Current  $I_n$     1.1 x  $I_n$  min.    2.1 x  $I_n$  max.

0.1 A - 12.5 A	60 min	60 min
----------------	--------	--------

## Time-Current-Curves

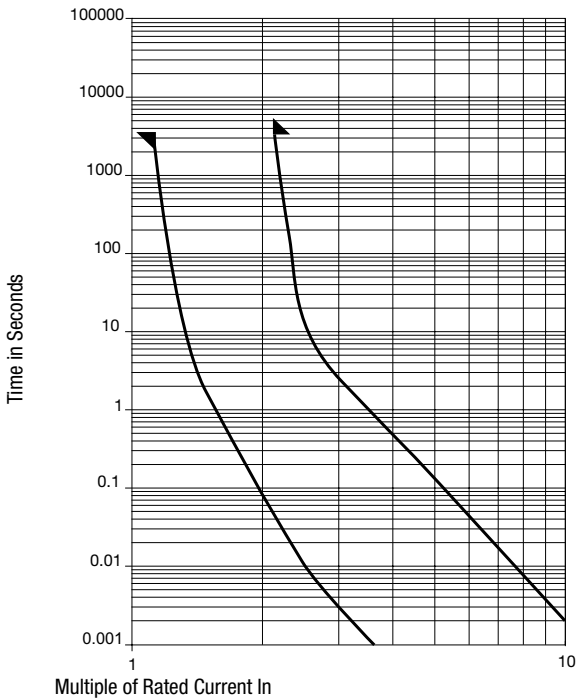

## All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]	Order Number
0.1	500	1)	2600	1500	0.0017	● 7022.0500
0.125	500	1)	2300	1500	0.0033	● 7022.0510
0.315	500	1)	2150	4100	0.027	● 7022.0550
0.4	500	1)	2750	2850	0.025	● 7022.0560
0.5	500	1)	2850	3650	0.045	● 7022.0570
0.63	500	1)	2000	3200	0.11	● 7022.0580
0.8	500	1)	2050	4150	0.18	● 7022.0590
1	500	1)	1750	4450	0.41	● 7022.0600
1.25	500	1)	740	4150	0.22	● 7022.0610
1.6	500	1)	570	3050	0.5	● 7022.0620
2	500	1)	615	4500	0.89	● 7022.0630
2.5	500	1)	465	4350	1.8	● 7022.0640
3.15	500	1)	440	5000	3.4	● 7022.0650
4	500	1)	335	4800	8.4	● 7022.0660
5	500	2)	395	7700	12	● 7022.0670
6.3	500	2)	170	3000	34	● 7022.0680
8	500	2)	135	3000	12	● 7022.0690
10	500	2)	155	4750	30	● 7022.0700
12.5	500	2)	180	-	26	● 7022.0710

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 150 kA @ 500 VAC , p.f. ≥ 0.2

2) 10 kA @ 500 VAC , p.f. ≥ 0.7

**Packaging Unit** Small Box Pack (10 pcs.)