

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, Sand, 250 VAC



250 VAC · Quick-Acting F



**Description**

- H = High Breaking Capacity

**Approvals**

- Approval Reference Type: SP 6.3x32

**Weblinks**


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

Rated Voltage	250 VAC	Resistance to Vibration	acc. to IEC 60068-2-6, test Fc
Rated current	0.5 - 20A		
Breaking Capacity	1000A - 1500A		
Characteristic	Quick-Acting F		
Mounting	Fuseholder / Clip		
Admissible Ambient Air Temp.	-40°C to 85°C		
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Tube	Glass with sand filling		
Material: Endcaps	Nickel-Plated Copper Alloy		
Unit Weight	2.51 g		
Storage Conditions	0°C to 60°C, max. 70% r.h.		
Product Marking	☐, Rated current, Rated Voltage, Characteristic, Approvals		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


**Dimension [mm]** 32 mm

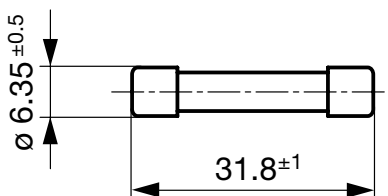

**Pre-Arcing Time**

Rated Current In	1.5 x In min.	2.1 x In max.	2.75 x In min.	2.75 x In max.	4.0 x In min.	4.0 x In max.	10.0 x In max.
0.5A - 4A	60 min	60 min	70 ms	5 s	10 ms	150 ms	10 ms
5A - 20A	60 min	60 min	150 ms	2 s	25 ms	200 ms	20 ms

Time-Current-Curves

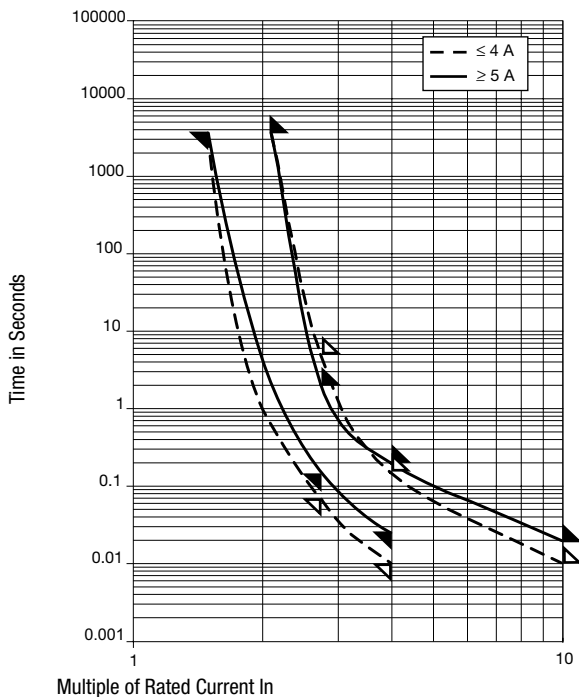

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In max. [mV]	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]	Order Number
0.5	250	1)	3000	1000	3000	0.13	0001.1021
0.63	250	1)	2500	2500	3800	0.003	0001.1022
0.8	250	1)	2200	520	1200	0.06	0001.1023
1	250	1)	1900	410	1200	0.4	0001.1024
1.25	250	1)	1600	1600	5400	-	0001.1025
1.6	250	1)	1300	460	2100	1.2	0001.1026
2	250	1)	1000	340	2000	2.4	0001.1027
2.5	250	1)	700	350	2800	4.1	0001.1028
3.15	250	1)	600	270	3000	7.9	0001.1029
4	250	1)	550	270	3500	15	0001.1030
5	250	1)	500	240	3700	32	0001.1031
6.3	250	1)	450	170	4700	38	0001.1032
8	250	1)	400	250	6700	62	0001.1033
10	250	1)	350	150	5200	140	0001.1034
12.5	250	2)	300	150	7600	230	0001.1035
16	250	2)	250	130	8400	455	0001.1036
20	250	2)	250	130	11500	846	0001.1037

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 1500 A @ 250 VAC , p.f. = 0.7 - 0.8

2) 1000 A @ 250 VAC , p.f. = 0.7 - 0.8

Packaging Unit Small Box Pack (10 pcs.)