

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 5 x 20 mm, Super-Time-Lag TT, NF, 220 VAC



NF C 93-435 · 220 VAC · Super-Time-Lag TT



Description

- Low Breaking Capacity

Standards

- UL 248-14
- NF C 93-435 - Model HA20
- Contrôle de Conformité de Qualité (CCQ)

Approvals

- Approval Reference Type: D1 TD
- UL File Number: E42088

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)



Technical Data

Rated Voltage	32 - 220 VAC
Rated current	0.031 - 15 A
Breaking Capacity	40 A - 100 A
Characteristic	Super-Time-Lag TT
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1.4 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, HA20, Rated current, Characteristic

Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


Dimension




Pre-Arcing Time



Rated Current I _n	1.1 x I _n min.	2.0 x I _n max.	2.1 x I _n max.	3.0 x I _n min.	3.0 x I _n max.	5.0 x I _n min.	5.0 x I _n max.	10.0 x I _n min.
0.031 A - 1.25 A	-	10 min	-	1 s	60 s	300 ms	10 s	30 ms
1.6 A - 15 A	-	-	10 min	1 s	60 s	300 ms	10 s	30 ms

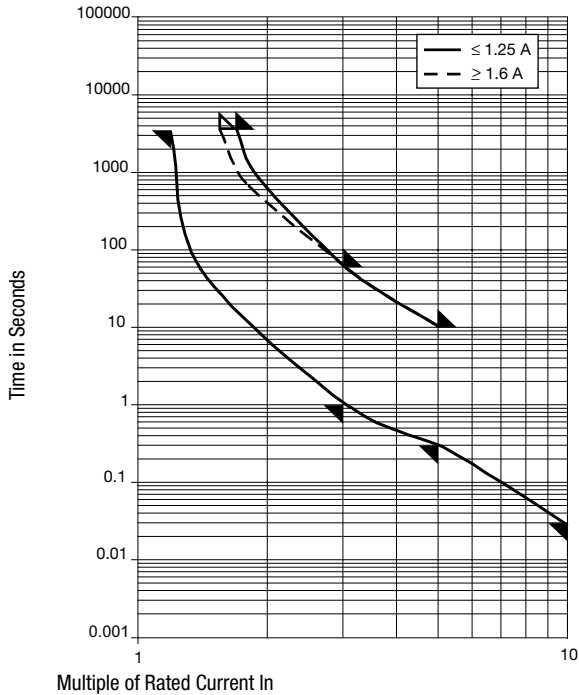Time-Current-Curves



All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.1 I _n typ. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]		Order Number
0.031	220	1)	3850	145	0.079	●	7030.3110
0.04	220	1)	3150	155	0.2	●	7030.3120
0.05	220	1)	2600	160	0.22	● ●	7030.3130
0.063	220	1)	2000	155	0.35	● ●	7030.3140
0.08	220	1)	1850	180	0.26	● ●	7030.3150
0.1	220	1)	1600	190	0.028	● ●	7030.3210
0.16	220	2)	745	150	0.2	● ●	7030.3230
0.2	220	2)	715	180	0.39	● ●	7030.3240
0.25	220	2)	480	150	0.4	● ●	7030.3250
0.31	220	2)	870	340	0.21	● ●	7030.3260
0.4	220	2)	665	340	0.64	● ●	7030.3270
0.5	220	2)	555	360	1	● ●	7030.3280
0.63	220	2)	460	370	1.6	● ●	7030.3290
0.8	220	2)	365	370	4.2	● ●	7030.3310
1	220	2)	295	365	9	● ●	7030.3320
1.25	220	2)	300	465	7.1	● ●	7030.3330
1.6	125	3)	280	535	22	● ●	7040.3110
2	125	3)	245	595	43	● ●	7040.3120
2.5	125	3)	210	630	128	● ●	7040.3130
3.15	125	3)	160	615	370	● ●	7040.3140
4	125	4)	165	790	260	● ●	7040.3150
5	125	4)	175	1100	440	● ●	7040.3160

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.1 I _n typ. [mW]	Melting Pt 10.0 Intyp. [A ² s]	  GAM T1 NNO	Order Number
6.3	125	4)	105	775	800	● ●	7040.3170
8	125	5)	105	1000	1400	●	7040.3180
10	125	5)	90	1050	2200	●	7040.3190
12.5	32	6)	55	795	890		7040.3200
15	32	6)	45	745	3400		7040.3210

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) NF: 60 A @ 220 VAC , p.f. = 1.0
- 1) UL: 4000 A @ 125 VAC , p.f. ≥ 0.9 / 4000 A @ 125 VDC , L/R = 5 ms
- 2) NF: 60 A @ 220 VAC , p.f. = 1.0
- 2) UL: 50 A @ 125 VAC , p.f. = 1.0 / 50 A @ 125 VDC , L/R = 5 ms
- 3) NF: 40 A @ 125 VAC , p.f. = 0.7 - 0.8
- 3) UL: 100 A @ 125 VAC , p.f. ≥ 0.9
- 4) NF: 40 A @ 125 VAC , p.f. = 0.7 - 0.8
- 4) UL: 50 A @ 125 VAC , p.f. ≥ 0.9
- 5) UL: 50 @ 125 VAC , p.f. ≥ 0.9
- 6) 100 A @ 32 VAC , p.f. ≥ 0.9

Packaging Unit Small Box Pack (10 pcs.)