

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

PRECISION AUDIO CLOCK SOURCE

ICS661

Description


The ICS661 provides synchronous clock generation for audio sampling clock rates derived from an MPEG stream, or can be used as a standalone clock source with a 27 MHz crystal. The device uses the latest PLL technology to provide excellent phase noise and long term jitter performance for superior synchronization and S/N ratio.

Please contact IDT if you have a requirement for an input and output frequency not included here - we can rapidly modify this product to meet special requirements.


Features

- Packaged in 16-pin TSSOP
- Pb (lead) free package, RoHS compliant
- Clock or crystal input
- Low phase noise
- Low jitter
- Exact (0 ppm) multiplication ratios
- Reference clock output available
- Support for 256, 384, 512, and 768 times sampling rate

Block Diagram

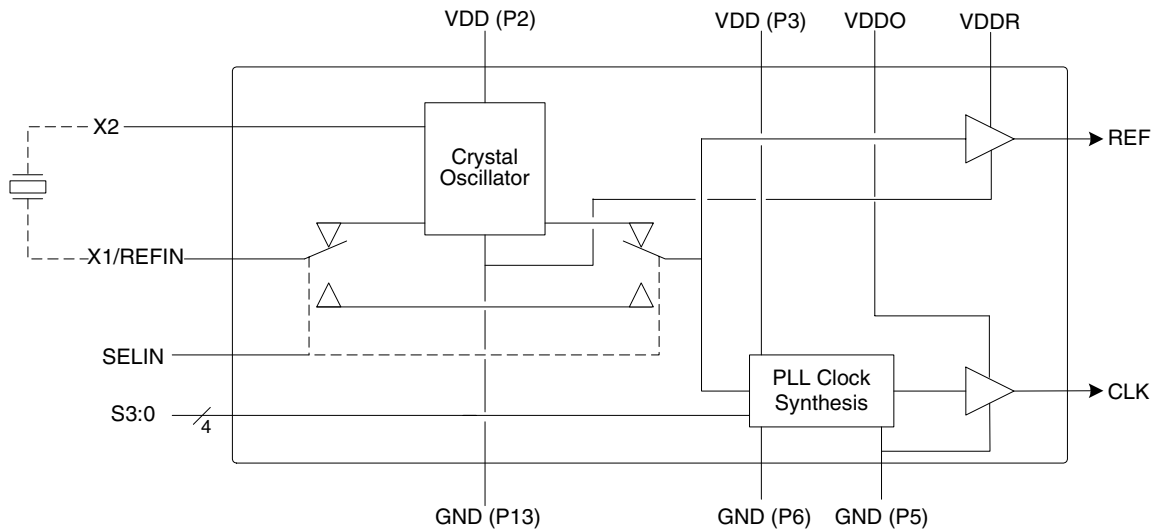

Pin Assignment

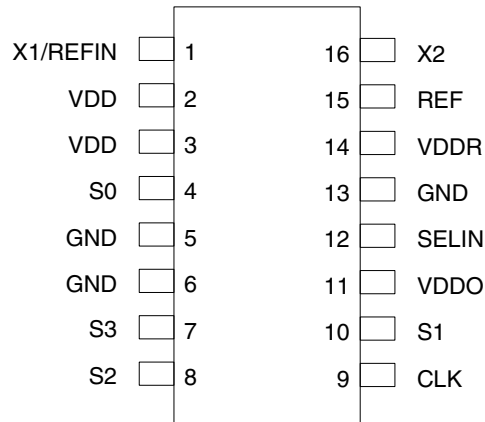

16-pin 4.40 mil body, 0.50 mm pitch TSSOP

Output Clock Selection Table

| S3 | S2 | S1 | S0 | Input Frequency (MHz) | Output Frequency (MHz) |
|----|----|----|----|-----------------------|------------------------|
| 0 | 0 | 0 | 0 | 27 | 8.192 |
| 0 | 0 | 0 | 1 | 27 | 11.2896 |
| 0 | 0 | 1 | 0 | 27 | 12.288 |
| 0 | 0 | 1 | 1 | 27 | 24.576 |
| 0 | 1 | 0 | 0 | 27 | 12.288 |
| 0 | 1 | 0 | 1 | 27 | 16.9344 |
| 0 | 1 | 1 | 0 | 27 | 18.432 |
| 0 | 1 | 1 | 1 | 27 | 36.864 |
| 1 | 0 | 0 | 0 | 27 | 16.384 |
| 1 | 0 | 0 | 1 | 27 | 22.5792 |
| 1 | 0 | 1 | 0 | 27 | 24.576 |
| 1 | 0 | 1 | 1 | 27 | 49.152 |
| 1 | 1 | 0 | 0 | 27 | 24.576 |
| 1 | 1 | 0 | 1 | 27 | 33.8688 |
| 1 | 1 | 1 | 0 | 27 | 36.864 |
| 1 | 1 | 1 | 1 | 27 | 73.728 |

Pin Descriptions

| Pin Number | Pin Name | Pin Type | Pin Description |
|------------|----------|----------|---|
| 1 | X1/REFIN | Input | Connect this pin to a crystal or clock input |
| 2 | VDD | Power | Power supply for crystal oscillator. |
| 3 | VDD | Power | Power supply for PLL. |
| 4 | S0 | Input | Output frequency selection. Determines output frequency per table above. On chip pull-up. |
| 5 | GND | Power | Connect to ground. |
| 6 | GND | Power | Ground for output stage. |
| 7 | S3 | Input | Output frequency selection. Determines output frequency per table above. On chip pull-up. |
| 8 | S2 | Input | Output frequency selection. Determines output frequency per table above. On chip pull-up. |
| 9 | CLK | Output | Clock output. |
| 10 | S1 | Input | Output frequency selection. Determines output frequency per table above. On chip pull-up. |
| 11 | VDDO | Power | Power supply for output stage. |
| 12 | SELIN | Input | Low for clock input, high for crystal. On chip pull-up. |
| 13 | GND | Power | Connect to ground. |
| 14 | VDDR | Power | Power supply for reference output. Ground to turn off REF. |
| 15 | REF | Output | Reference clock output. |
| 16 | X2 | Input | Connect this pin to a crystal. Leave open if using a clock input. |

Application Information

Series Termination Resistor


Clock output traces should use series termination. To series terminate a 50Ω trace (a commonly used trace impedance), place a 33Ω resistor in series with the clock line, as close to the clock output pin as possible. The nominal impedance of the clock output is 20Ω.

Decoupling Capacitors

As with any high performance mixed-signal IC, the ICS661 must be isolated from system power supply noise to perform optimally.

Decoupling capacitors of 0.01μF must be connected between each VDD and the PCB ground plane. To further guard against interfering system supply noise, the ICS661 should use one common connection to the PCB power plane as shown in the diagram on the next page. The ferrite bead and bulk capacitor help reduce lower frequency noise in the supply that can lead to output clock phase modulation.

Recommended Power Supply Connection for Optimal Device Performance

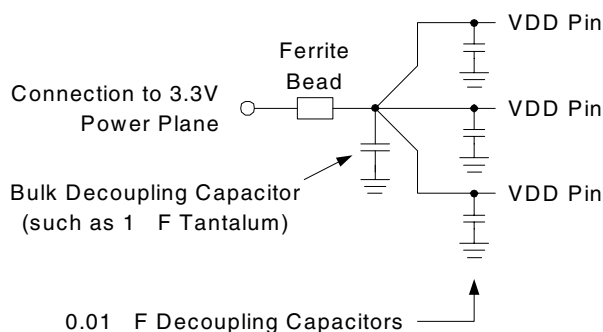

All power supply pins must be connected to the same voltage, except VDDR and VDDO may be connected to a lower voltage in order to change the output level. If the reference output is not used, ground VDDR.

Crystal Load Capacitors

If a crystal is used, the device crystal connections should include pads for capacitors from X1 to ground and from X2 to ground. These capacitors are used to adjust the stray

capacitance of the board to match the nominally required crystal load capacitance. To reduce possible noise pickup, use very short PCB traces (and no vias) between the crystal and device.

The value of the load capacitors can be roughly determined by the formula $C = 2(C_L - 6)$ where C is the load capacitor connected to X1 and X2, and C_L is the specified value of the load capacitance for the crystal. A typical crystal C_L is 18 pF, so $C = 2(18 - 6) = 24$ pF. Because these capacitors adjust the stray capacitance of the PCB, check the output frequency using your final layout to see if the value of C should be changed.

PCB Layout Recommendations

For optimum device performance and lowest output phase noise, the following guidelines should be observed.

- 1) Each 0.01μF decoupling capacitor should be mounted on the component side of the board as close to the VDD pin as possible. No vias should be used between decoupling capacitor and VDD pin. The PCB trace to VDD pin should be kept as short as possible, as should the PCB trace to the ground via. Distance of the ferrite bead and bulk decoupling from the device is less critical.
- 2) The external crystal should be mounted next to the device with short traces. The X1 and X2 traces should not be routed next to each other with minimum spaces, instead they should be separated and away from other traces.
- 3) To minimize EMI and obtain the best signal integrity, the 33Ω series termination resistor should be placed close to the clock output.
- 4) An optimum layout is one with all components on the same side of the board, minimizing vias through other signal layers (the ferrite bead and bulk decoupling capacitor can be mounted on the back). Other signal traces should be routed away from the ICS661. This includes signal traces just underneath the device, or on layers adjacent to the ground plane layer used by the device.

Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the ICS661. These ratings, which are standard values for IDT commercially rated parts, are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

| Item | Rating |
|-------------------------------|---------------------|
| Supply Voltage, VDD | 5.5 V |
| All Inputs and Outputs | -0.5 V to VDD+0.5 V |
| Ambient Operating Temperature | -40 to +85° C |
| Storage Temperature | -65 to +150° C |
| Junction Temperature | 125° C |
| Soldering Temperature | 260° C |

Recommended Operation Conditions

| Parameter | Min. | Typ. | Max. | Units |
|---|------|------|------|-------|
| Ambient Operating Temperature | -40 | | +85 | °C |
| Power Supply Voltage (measured in respect to GND) | +3.0 | | +3.6 | V |

DC Electrical Characteristics

Unless stated otherwise, VDD = 3.3 V ±10%, Ambient Temperature -40 to +85° C

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|---------------------------|------------------|--------------------------|---------|------|------|-------|
| Operating Voltage | VDD | | 3.0 | | 3.6 | V |
| | VDDO | | 1.8 | | VDD | V |
| | VDDR | | 1.8 | | VDD | V |
| Input High Voltage | V _{IH} | | 2 | | | V |
| Input Low Voltage | V _{IL} | | | | 0.8 | V |
| Output High Voltage | V _{OH} | I _{OH} = -4 mA | VDD-0.4 | | | V |
| Output High Voltage | V _{OH} | I _{OH} = -20 mA | 2.4 | | | V |
| Output Low Voltage | V _{OL} | I _{OL} = 20 mA | | | 0.4 | V |
| Supply Current | IDD | No Load | | 25 | | mA |
| Short Circuit Current | I _{OS} | Each output | | ±65 | | mA |
| Nominal Output Impedance | Z _{OUT} | | | 20 | | Ω |
| Input Capacitance | | Input pins | | 7 | | pF |
| Internal Pull-up Resistor | | | | 120 | | kΩ |

AC Electrical Characteristics

Unless stated otherwise, $V_{DD} = 3.3\text{ V} \pm 10\%$, Ambient Temperature -40 to $+85^\circ\text{C}$


| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|---|----------|------------------------------------|------|----------|------|--------|
| Crystal Frequency | | | | 27 | 28 | MHz |
| Output Clock Rise Time | t_{OR} | 20% to 80%, 15 pF load | | | 1.5 | ns |
| Output Clock Fall Time | t_{OF} | 80% to 20%, 15 pF load | | | 1.5 | ns |
| Output Duty Cycle | t_{OD} | At $V_{DD}/2$, 15 pF load | 45 | 49 to 51 | 55 | % |
| Jitter, Short term | | Reference clock off | | 175 | | ps p-p |
| Jitter, Short term | | Reference clock on | | 175 | | ps p-p |
| Jitter, Long term | | Reference clock off; 10 us delay | | 300 | | ps p-p |
| Jitter, Long term | | Reference clock on; 10 us delay | | 300 | | ps p-p |
| Single Sideband Phase Noise | | Reference clock off; 10 kHz offset | | -110 | | dBc |
| Single Sideband Phase Noise | | Reference clock on; 10 kHz offset | | -110 | | dBc |
| Actual Mean Frequency Error versus Target | | | | 0 | | ppm |

Thermal Characteristics

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|--|---------------|----------------|------|------|------|--------------------|
| Thermal Resistance Junction to Ambient | θ_{JA} | Still air | | 78 | | $^\circ\text{C/W}$ |
| | θ_{JA} | 1 m/s air flow | | 70 | | $^\circ\text{C/W}$ |
| | θ_{JA} | 3 m/s air flow | | 68 | | $^\circ\text{C/W}$ |
| Thermal Resistance Junction to Case | θ_{JC} | | | 37 | | $^\circ\text{C/W}$ |

Package Outline and Package Dimensions (16-pin TSSOP, 4.40 mm Body, 0.65 mm Pitch)

Package dimensions are kept current with JEDEC Publication No. 95, MO-153

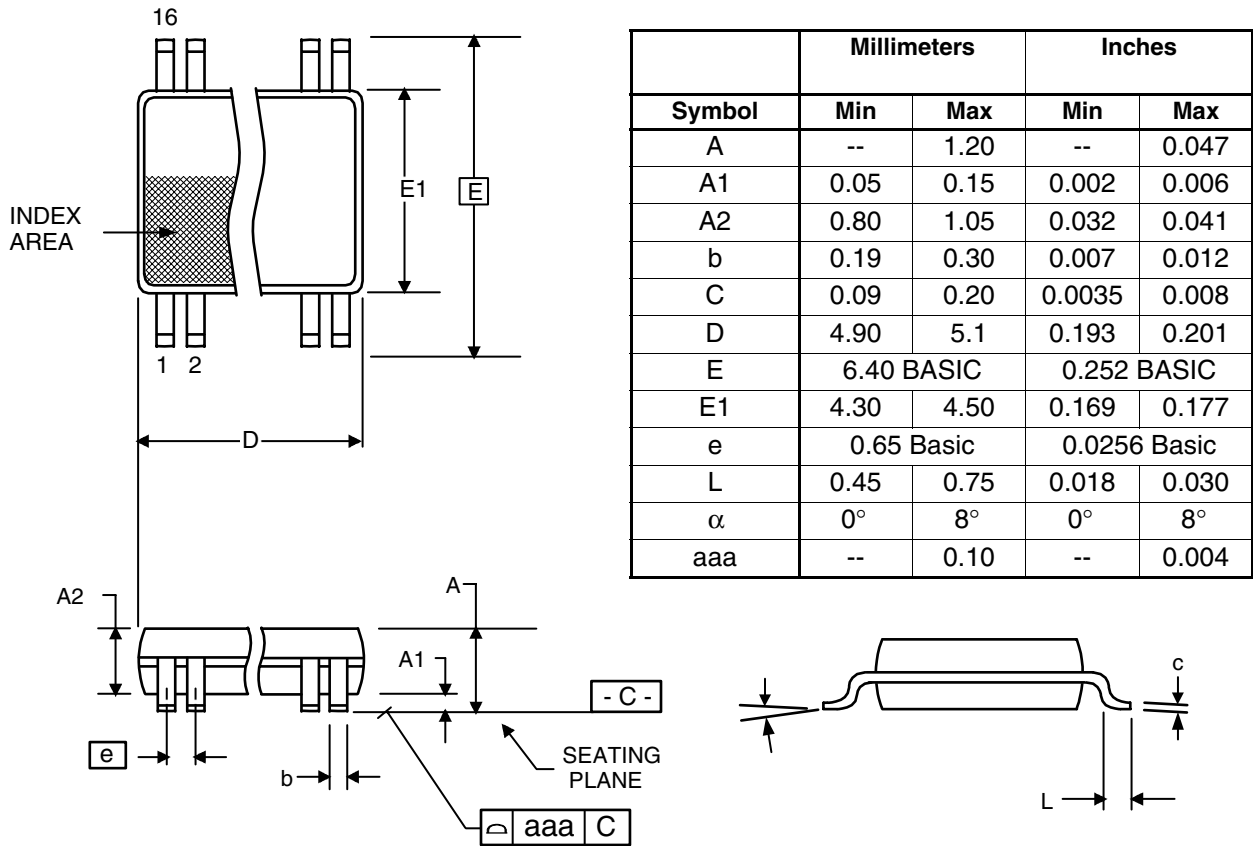

Ordering Information

| Part / Order Number | Marking | Shipping Packaging | Package | Temperature |
|---------------------|---------|--------------------|--------------|--------------|
| 661GILF | 661GILF | Tubes | 16-pin TSSOP | -40 to +85°C |
| 661GILFT | 661GILF | Tape and Reel | 16-pin TSSOP | -40 to +85°C |

"LF" suffix to the part number are the Pb-Free configuration and are RoHS compliant.

While the information presented herein has been checked for both accuracy and reliability, Integrated Device Technology (IDT) assumes no responsibility for either its use or for the infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by IDT. IDT reserves the right to change any circuitry or specifications without notice. IDT does not authorize or warrant any IDT product for use in life support devices or critical medical instruments.

Innovate with IDT and accelerate your future networks. Contact:

www.IDT.com

For Sales

800-345-7015
408-284-8200
Fax: 408-284-2775

For Tech Support

www.idt.com/go/clockhelp

Corporate Headquarters

Integrated Device Technology, Inc.
www.idt.com



www.IDT.com