

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .


TO-92 Plastic-Encapsulate Transistors

BC546/BC547/BC548 TRANSISTOR (NPN)

FEATURES

- High Voltage
- Complement to BC556,BC557,BC558

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

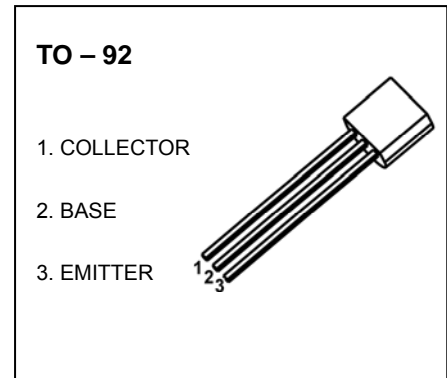

Symbol	Parameter	Value	Unit	
V _{CBO}	Collector-Base Voltage	BC546	80	V
		BC547	50	
		BC548	30	
V _{CEO}	Collector-Emitter Voltage	BC546	65	V
		BC547	45	
		BC548	30	
V _{EBO}	Emitter-Base Voltage	BC546	6	V
		BC547	6	V
		BC548	5	V
I _C	Collector Current-Continuous	0.1	A	
P _C	Collector Power Dissipation	625	mW	
R _{θJA}	Thermal Resistance from Junction to Ambient	200	°C/W	
T _j	Junction Temperature	150	°C	
T _{stg}	Storage Temperature	-55~+150	°C	



ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter		Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BC546	V _{(BR)CBO}	I _C =0.1mA, I _E =0	80			V
	BC547			50			
	BC548			30			
Collector-emitter breakdown voltage	BC546	V _{(BR)CEO}	I _C =1mA, I _B =0	65			V
	BC547			45			
	BC548			30			
Emitter-base breakdown voltage	BC546	V _{(BR)EBO}	I _E =10μA, I _C =0	6			V
	BC547			6			
	BC548			5			
Collector cut-off current	BC546	I _{CBO}	V _{CB} =70V, I _E =0			0.1	μA
	BC547		V _{CB} =50V, I _E =0			0.1	μA
	BC548		V _{CB} =30V, I _E =0			0.1	μA
Collector cut-off current	BC546	I _{CEO}	V _{CE} =60V, I _B =0			0.1	μA
	BC547		V _{CE} =45V, I _B =0			0.1	μA
	BC548		V _{CE} =30V, I _B =0			0.1	μA
Emitter cut-off current		I _{EBO}	V _{EB} =5V, I _C =0			0.1	μA
DC current gain		h _{FE} *	V _{CE} =5V, I _C =2mA	110		800	
Collector-emitter saturation voltage		V _{CE(sat)}	I _C =100mA, I _B =5mA			0.3	V
Base-emitter saturation voltage		V _{BE(sat)}	I _C =100mA, I _B =5mA			1.1	V
Base-emitter voltage		V _{BE}	V _{CE} =5V, I _C =2mA	0.58		0.7	V
			V _{CE} =5V, I _C =10mA			0.75	V
Collector output capacitance		C _{ob}	V _{CB} =10V, I _E =0, f=1MHz			4.5	pF
Transition frequency		f _T	V _{CE} =5V, I _C =10mA, f=100MHz	150			MH

CLASSIFICATION of h_{FE}


RANK	A	B	C
RANGE	110-220	200-450	420-800

TO-92 Package Outline Dimensions

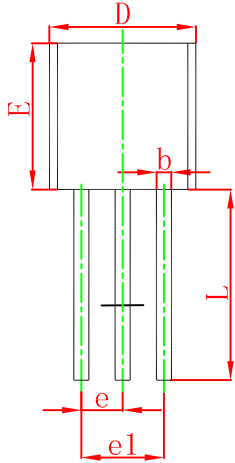

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

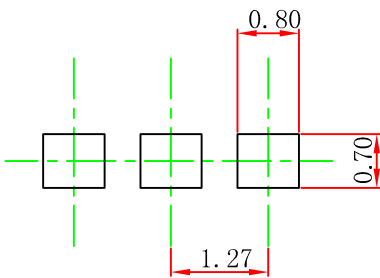


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.


NOTICE

JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

TO-92 PACKAGE TAPEING DIMENSION

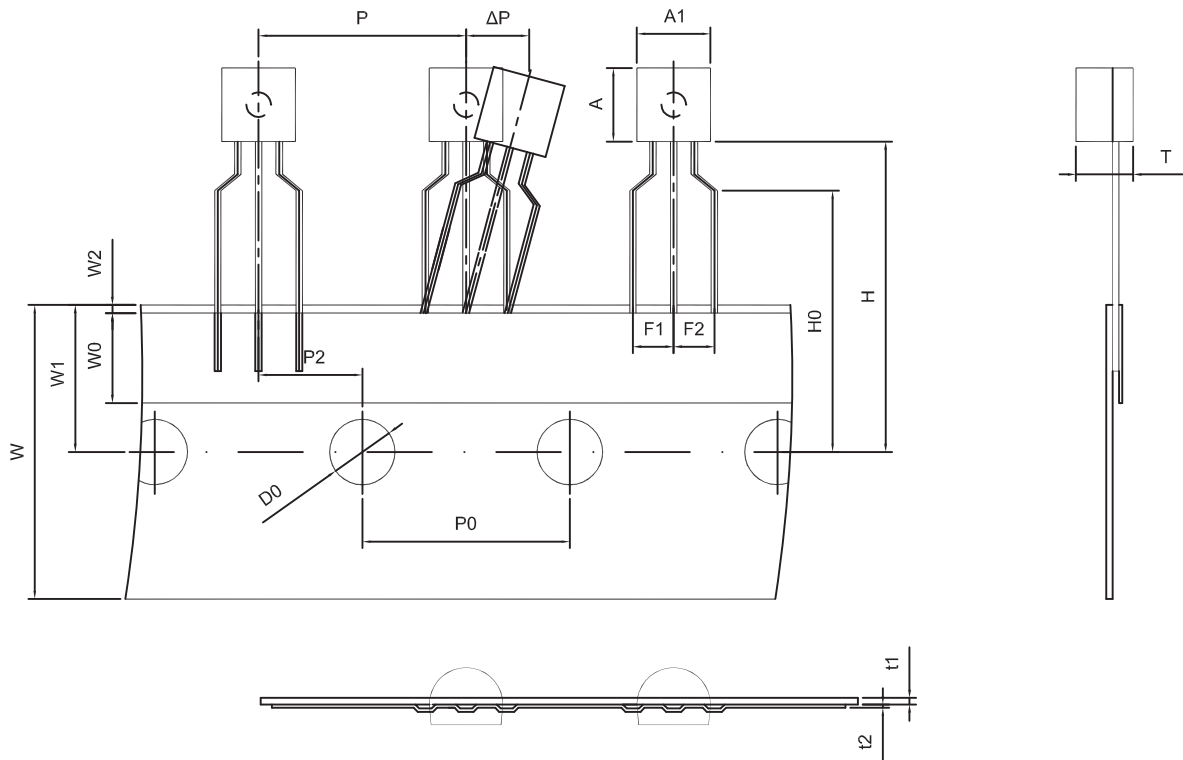

Dimiensions are in millimeter								
A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

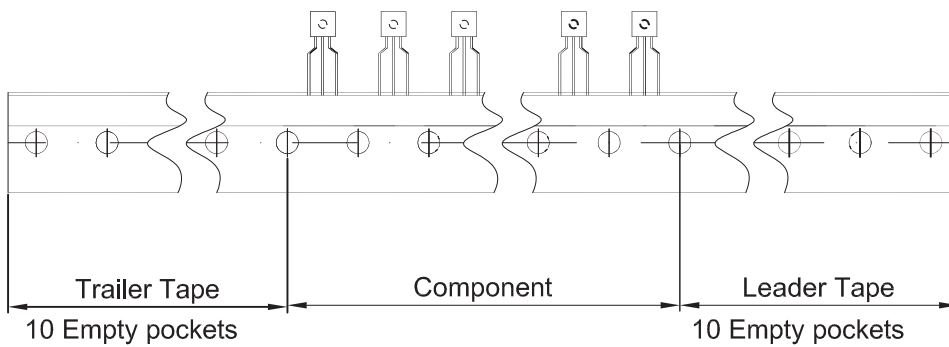

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250