

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Specifications

Items	Condition	Specifications					
Rated voltage (V)	—	2.5	4.0	6.3	10	16	20
Surge voltage (V)	Room temperature	3.3	5.2	8.2	12	18	23
Category temperature range (°C)	—	-55 to +105					
Capacitance tolerance (%)	120Hz/20°C	M : ±20					
Dissipation Factor (DF)	120Hz/20°C	Please see the attached characteristics list					
Leakage current*1	Rated voltage applied, after 2 minutes	Please see the attached characteristics list					
Equivalent series resistance (ESR)	100kHz/20°C	Please see the attached characteristics list					
Characteristics of impedance ratio at high temp. and low temp.	Based the value at 100kHz, +20°C	-55°C	Z/Z _{20°C}	0.75 to 1.25			
		+105°C	Z/Z _{20°C}	0.75 to 1.25			
Endurance	105°C, 2,000h, Rated voltage applied	ΔC/C	Within ±20% of the initial value				
		DF	Within 1.5 times of the initial limit				
		ESR	Within 1.5 times of the initial limit				
		LC	Within the initial limit				
Damp heat(Steady state)	60°C, 90 to 95%RH, 1,000h, No-applied voltage	ΔC/C	Within ±20% of the initial value				
		DF	Within 1.5 times of the initial limit				
		ESR	Within 1.5 times of the initial limit				
		LC	Within the initial limit (after voltage processing)				
Resistance to soldering heat*2	VPS (230°C X 75s)	ΔC/C	Within ±10% of the initial value				
		DF	Within 1.3 times of the initial limit				
		ESR	Within 1.3 times of the initial limit				
		LC	Within the initial limit (after voltage processing)				

*1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C.

*2 Please refer to page 25 for reflow soldering conditions.

Marking and dimensions

Polarity marking (Cathode)

Case No.
Series
Rated capacitance
Rated voltage

(unit : mm)

Size code	φD ±0.5	L ^{+0.1} _{-0.4}	W ±0.2	H ±0.2	C ±0.2	R	p ±0.2
B6	5.0	5.9	5.3	5.3	6.0	0.6~0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6~0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6~0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6~0.8	4.6

Size list

RV : Rated voltage


μF \ RV	2.5	4.0	6.3	10	16	20
10						B6
22						C6
39					C6	
47			B6			E7
68		B6		C6		
82	B6				E7	
120			C6			
150		C6		E7		
180	C6				F8	
220			E7			
270		E7				
330	E7			F8		
470			F8			
680		F8				
820	F8					

SVPA series characteristics list

Size code	Part number	Rated voltage (V)	Rated capacitance (μ F)	ESR (m Ω) (max)		Rated ripple current 100kHz (mA _{rms}) at 105°C	DF (% max)	Leakage current (μ A) (max) After 2 minutes
				100kHz/20°C	300kHz/20°C*1			
B6	20SVPA10M	20	10	40	35	1700	12	80
	6SVPA47MAA	6.3	47	30	26	1970	12	300
	4SVPA68MAA	4.0	68	30	26	1970	12	300
	2R5SVPA82MAA	2.5	82	30	26	1970	12	300
C6	20SVPA22M	20	22	35	31	2040	12	88
	16SVPA39MAA	16	39	35	31	2040	12	300
	16SVPA39MAAY	16	39	24	20	2460	12	300
	10SVPA68MAA	10	68	30	26	2200	12	300
	6SVPA120MAA	6.3	120	22	19	2570	12	300
	4SVPA150MAA	4.0	150	22	19	2570	12	300
	2R5SVPA180MAA	2.5	180	20	18	2690	12	300
E7	20SVPA47M	20	47	33	29	2630	12	188
	16SVPA82MAA	16	82	30	25	2760	12	262
	10SVPA150MAA	10	150	30	25	2760	12	500
	6SVPA220MAA	6.3	220	22	19	3220	12	500
	4SVPA270MAA	4.0	270	22	19	3220	12	500
	2R5SVPA330MAA	2.5	330	20	18	3370	12	500
F8	16SVPA180M	16	180	29	28	3430	12	576
	10SVPA330M	10	330	24	23	3770	12	660
	6SVPA470M	6.3	470	20	19	4130	12	592
	4SVPA680M	4.0	680	20	19	4130	12	544
	2R5SVPA820M	2.5	820	19	18	4240	12	500

*1 The ESR value at 300kHz is a reference one.

Recommended land pattern dimension of PWB

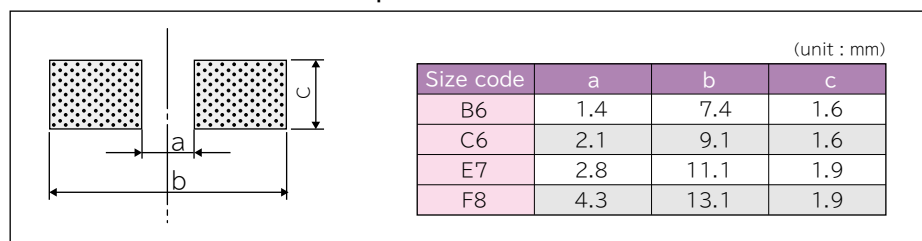

Frequency coefficient for ripple current

Frequency	120Hz ≤ f < 1kHz	1kHz ≤ f < 10kHz	10kHz ≤ f < 100kHz	100kHz ≤ f ≤ 500kHz
Coefficient	0.05	0.3	0.7	1