

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

DF52 Series


0.8 mm pitch, Small & Robust Wire to Board Connector

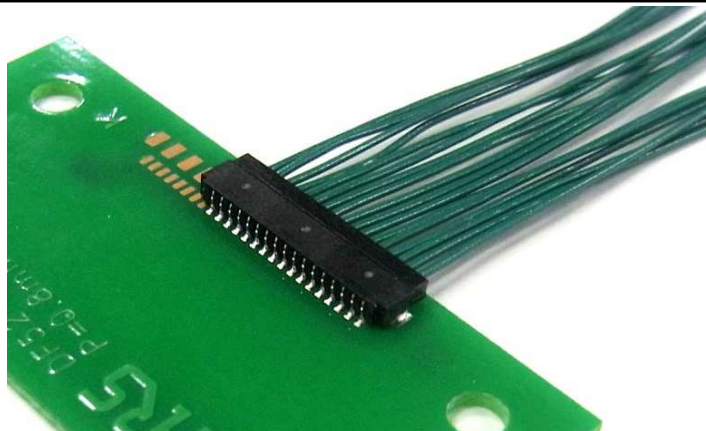

◆ Features

1. 0.8 mm pitch, 1.75 mm height 4.1 mm depth small connector
2. Rated up to 2.5 Amps MAX with AWG#28, 2 pos.
3. Robust design is tolerant of cable wiring.
4. High contact lance strength
5. Box shape crimp contact prevents deformation
6. Supports cables with jacket O/D 0.5 to 0.6 mm, AWG#32 to 28
7. RoHS compliant, halogen-free product
8. Will be UL approved

◆ Dimensions

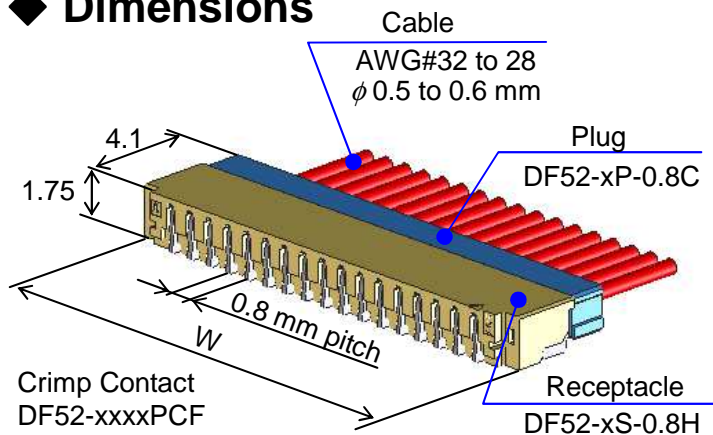

	2	3	4	5	6	8	10
Width (mm)	3.8	4.6	5.4	6.2	7.0	8.6	10.2
	12	14	15	16	17	20	-
Width (mm)	11.8	13.4	14.2	15.0	15.8	18.2	-

◆ Variation

Mass Production: 2, 3, 4, 5, 6, 8, 10, 12, 14, 15, 16, 17 and 20 pos.*

* Technically available up to 25 pos.

Please consult your sales representative for details.

◆ Material & Finish

Item		Material	Finish
Receptacle	Housing	Polyamide	UL94V-0, Black
	Contact	Copper Alloy	Tin plating
	Metal Fitting	Brass	Tin plating
Plug	Housing	Polyamide	UL94V-0, Black
	Crimp Terminal	Copper Alloy	Tin plating

◆ Performance Characteristics

Rated Current (Value in case all pins used for power)		AWG28	AWG30	AWG32
	2 pos.	2.5 Amps	2.0 Amps	1.5 Amps
	3 to 5 pos.	2.0 Amps	1.5 Amps	1.0 Amps
	6 to 10 pos.	1.5 Amps	1.2 Amp	0.8 Amp
	12 pos. or more	1.2 Amps	1.0 Amp	0.8 Amp
Rated Voltage	AC/DC 100V			
Contact Resistance	10 mΩ Max. (20mV, 1mA)			
Insulation Resistance	100 MΩ Min. (DC 100V)			
Withstanding Voltage	AC 300V, for 1 minute			
Operating Temperature Range	-40 °C to +85 °C (Includes temperature rise during current flow)			
Applicable Cable	AWG#32 to 28, ϕ 0.5 to 0.6 mm			
Durability	20 times			

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.