


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

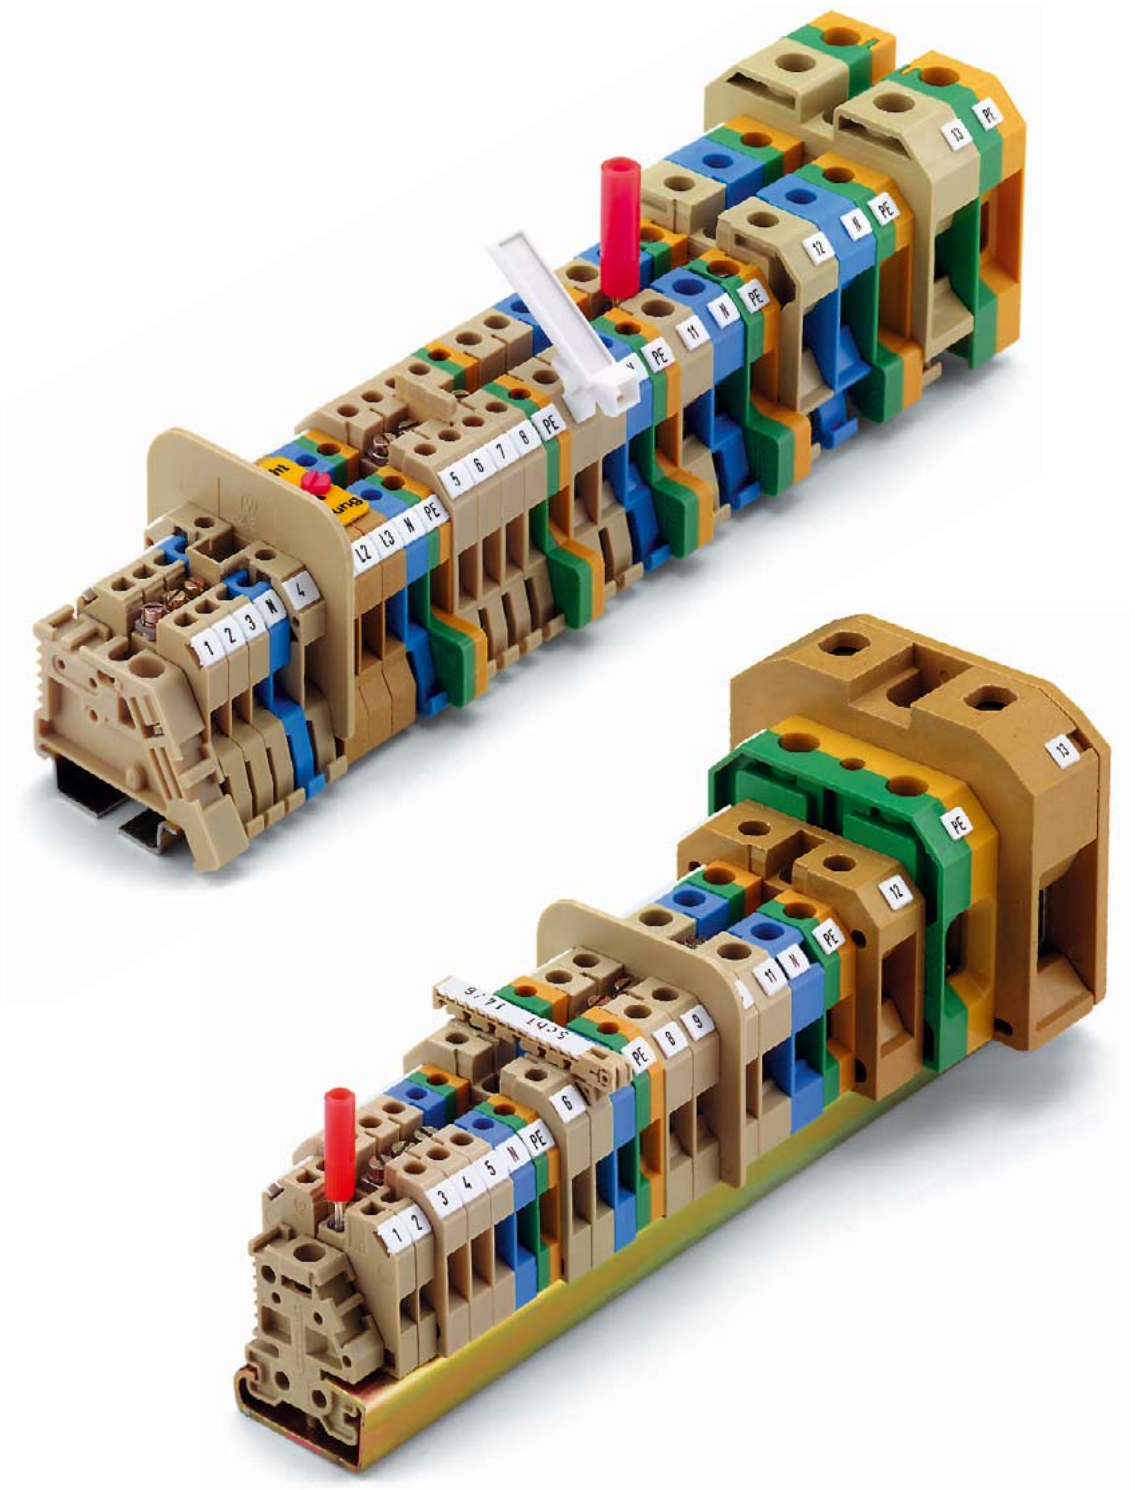

Weidmüller terminal - SAK-series- are proved in millions of applications for more than 50 years.

Available for the two rail systems TS32 and TS35, the SAK terminals are useable for every application and for all cross-sections. SAK terminals fulfill the requirements of EN 60 947-7-1.

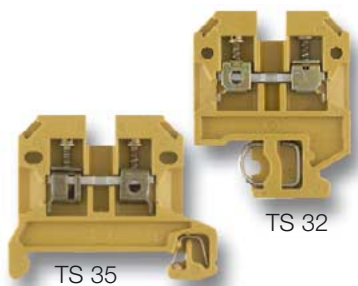


Thermosetting plastic or Thermoplastic


Terminal of thermosetting plastic are normally used in applications where high continuous service temperature and high flammability level are necessary. The Weidmüller thermosetting plastic KRG is very resistant against infection through mould and micro-organisms.

The thermoplastic material Polyamide 66 has very good electrical and mechanical properties upto 100°C. PA66 is flexible and unsusceptible to fracture, even with low temperatures.

Polyamid 66 has improved fire resistance and is self-extinguishing with flammability level V2 according to UL 94.

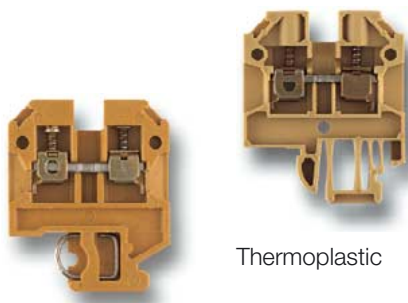

Thermosetting plastic

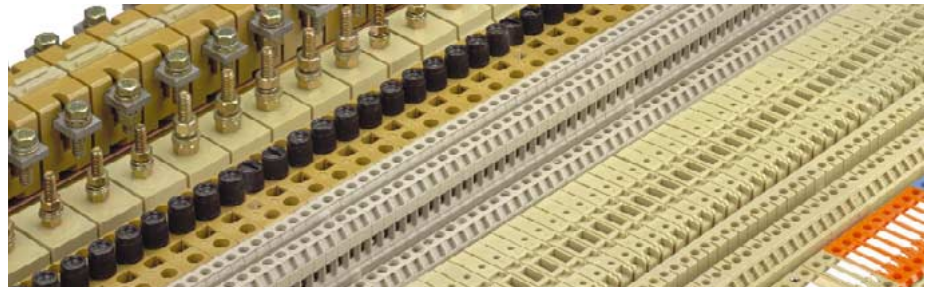

Cross-connection systems

40% of all terminals are cross-connected for potential branching.

Weidmüller distinguishes between the following cross-connection units for SAK-series:

- type Q pre-assembled cross-connections
- type QL permanent cross-connections
- type VL removeable cross-connection straps
- type QS removeable cross-connection plugs

Cross-connection systems from the SAK and AKZ series, type Q, QL or VL or other freely accessible live components, must be protected with appropriate covers ADP 1 or 4 or TSK 31.5 as long as they are to be inserted safe from contact.



Approvals

The following approvals apply to SAK terminals:

- UL-USA
- CSA-Canada
- GOST-Russia
- SEV-Switzerland
- KEMA-Netherlands
- Lloyds Register of Shipping
- Germanischer Lloyd
- Det Norske Veritas

SAK portfolio

- Feed-through terminals
- Protective conductor terminals
- Fuse terminals
- Disconnect-test terminals
- Feed-through terminals with tab, solder, WireWrap and Termi Point connections
- Initiator terminals, Actuator terminals
- Stud terminals

Accessories



An extensive assortment of accessories is available for Weidmüller SAK terminals:

- Partitions
- Cover plates
- Small partitions
- Test plugs
- Test adapters
- Marking material
- Cross-connections and
- Covers

Positioning of end plates or partitions between cross-connections

Operating voltage	Terminal width (in mm)					
	≤ 6	≤ 8	10	12	18	22
125 V ~	AP	-	-	-	-	-
250 V ~	AP	-	-	-	-	-
380 V ~	AP	AP	-	-	-	-
440 V ~	TW	AP	AP	AP	AP	-
500 V ~	TW	TW	AP	AP	AP	-
660 V ~	TW	TW	TW	TW	TW	AP
750 V ~	TW	TW	TW	TW	TW	AP

In PA terminals small partitions (TSch) have to be used up to 380 V.

Feed-through terminals

SAKD 2.5 N SAKD 2.5/10/35



UL CE LR

SAK 2.5/35 SAK 2.5/10/35



UL CE KEH LR

SAK 2.5 SAK 2.5/10



UL CE KEH LR DNV

SAK 4/35 SAK 4/10/35



UL CE KEH

Dimensions/approvals

Width/length/height (mm)	with TS 32	5/32.5/43.5
Width/length/height (mm)	with TS 35 x 7.5	5/44/38
Insulation stripping length/clamping screw/screwdriver blade		10/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/24 A/2.5 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.6
Torque setting with electric screwdriver type DMS 2		1

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...2.5
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A 2
Continuous current of terminal for conductor size		30 A/4 mm ²
Continuous current rating of cross-connection 2...5-pole	A	24
Continuous current rating of cross-connection 6...10-pole	A	24

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/20 A/28...12 AWG
Voltage/current/conductor size	CSA	300 V/20 A/22...12 AWG

Ordering data

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0215560000	0268860000
Blue PA	0215580000	0268880000
Orange PA		
Terminal block with marking PA	0401060000	0523160000
Terminal block without marking PA	0401160000	10

End plate (thickness mm)



Type	Cat. No.	Qty.
KrG		
Blue KrG		
KrS		
PA	AP (1.5)	0150960000 20
Blue PA	AP (1.5)	0150980000 20
PA		
Blue PA		

Partition (thickness mm)



Type	Cat. No.	Qty.
KrG		
Blue KrG		
KrS		
PA	TW (1.5)	0191860000 20
Blue PA	TW (1.5)	0191880000 20
HP	TW (1.5)	0307500000 20

Small partition

TSch 1

TSch 3	0366860000	100
--------	------------	-----

Cross-connection

Q 4	2-pole	Q 2	0367800000	50
	3-pole	Q 3	0367900000	50
	4-pole	Q 4	0368000000	50
	10-pole	Q 10	0368100000	20

Cover plates

AD 4	0303400000	50
BSKM3x22	0128900000	100

Switchable cross-connection link




BS

VH

VL 2	0197000000	100
VH	0285100000	50
BS	0292500000	100

Marking tags



DEK

Standard

DEK 5	see "Accessories"
DEK 6	see "Accessories"
DEK 6	see "Accessories"
DEK 6.5	see "Accessories"


Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")
²⁾ Not suitable for SST 3 safety pin

³⁾ Cat. No. 0279660000, 0279680000, 0380460000 and 0380480000, 41 A for 6 mm²

Feed-through terminals


SAK 4 SAK 4/10



DK 4 Q* DKB4 Q*/10*



DK 4 DK4/35



Dimensions/approvals

Width/length/height (mm) with TS 32 with TS 35 x 7.5

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section

Rated impulse voltage/pollution severity

Further technical data

Tightening torque range Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U mm²

Stranded H07V-R mm²

Flexible H07V-K mm²

Flexible H07V-K and ferrule according to DIN 46 228/1 mm²

With/without plastic insulating collar mm²

Plug gauge according to 60 947-7-1 Size

Continuous current of terminal for conductor size

Continuous current rating of cross-connection 2...5-pole A

Continuous current rating of cross-connection 6...10-pole A

Technical data

Voltage/current/conductor size UL

Voltage/current/conductor size CSA

Ordering data

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾²⁾	100
Blue PA	0128380000 ¹⁾²⁾	100
Orange PA	0105060000 ¹⁾²⁾	100
Terminal block with marking PA	0322660000 ¹⁾²⁾	10
Terminal block without marking PA	0308860000 ¹⁾²⁾	10

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition

TSch 6 TSch 1 **0319160000** 100

Cross-connection

Type	Cat. No.	Qty.
Q 2	0336700000	50
Q 3	0336800000	50
Q 4	0336900000	50
Q 10	0368800000	20
QB 2	0482700000 **100	
QB 3	0482800000 ** 50	
QB 4	0482900000 ** 50	

Switchable cross-connection link

Type	Cat. No.	Qty.
VL 2	0197000000	100
VH	0285100000	50
BS	0292500000	100

Marking tags

Type	Cat. No.	Print
DEK6.5	see "Accessories"	
DEK6	see "Accessories"	
DEK6	see "Accessories"	

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. **1056400000**

** 2.5 mm² conductor connection when using QB

1) Contact-proof cross-connec. with ADP 4 over profile (see "Accessories")

2) Not suitable for fuse pin SST 3

Feed-through terminals

DK4 QV* DK4 QV/35*



Width/length/height (mm) with TS 32	6/54/60
Width/length/height (mm) with TS 35 x 7.5	6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm) with TS 32	6/54/60
Width/length/height (mm) with TS 35 x 7.5	6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/32 A/4 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3
Continuous current of terminal for conductor size		32 A/4 mm ²
Continuous current rating of cross-connection 2...5-pole	A	32
Continuous current rating of cross-connection 6...10-pole	A	32


Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/27 A/22...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG

Ordering data

Version	Type	Cat. No.	Qty.
KrG	AP	1397160000	20
Blue KrG	AP	1397180000	20
KrS	AP	1397160000	20
PA	AP	1397180000	20
Blue PA	AP	1397180000	20
Orange PA	AP	1397180000	20
Terminal block with marking	TSch 6	0190260000	100
Terminal block without marking	TSch 6	0190260000	100

SAK 6 N SAK 6/10/35



Width/length/height (mm)	8/40/51.5
Width/length/height (mm)	8/45/44
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 3.5/4.0 x 0.8

Rated voltage/current/cross-section	800 V/41 A/6 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 0.8...1.6
Torque setting with electric screwdriver type DMS 2	3

Solid H07V-U	mm ²	0.5...10
Stranded H07V-R	mm ²	0.5...6
Flexible H07V-K	mm ²	0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	0.5...6
Plug gauge according to 60 947-7-1	Size	A 5
Continuous current of terminal for conductor size		41
Continuous current rating of cross-connection 2...5-pole	A	41
Continuous current rating of cross-connection 6...10-pole	A	41

Voltage/current/conductor size	UL	600 V/40 A/22...8 AWG
Voltage/current/conductor size	CSA	600 V/47 A/20...8 AWG

Version	Type	Cat. No.	Qty.
KrG	AP	0119220000	100
Blue KrG	AP	0119220000	100
KrS	AP	0119220000	100
PA	AP	0119220000	100
Blue PA	AP	0119220000	100
Orange PA	AP	0119220000	100
Terminal block with marking	TSch 1	0322760000	10
Terminal block without marking	TSch 1	0308960000	10

SAK 10 SAK 10/10/35



Width/length/height (mm)	10/40/51.5
Width/length/height (mm)	10/45/44
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1.0

Rated voltage/current/cross-section	800 V/57 A/10 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 1.2...2.0 ³⁾
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ²	1.5...10
Stranded H07V-R	mm ²	2.5...16
Flexible H07V-K	mm ²	1.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	1.5...10
Plug gauge according to 60 947-7-1	Size	B 6
Continuous current of terminal for conductor size		76 A/16 mm ²
Continuous current rating of cross-connection 2...5-pole	A	57
Continuous current rating of cross-connection 6...10-pole	A	57

Voltage/current/conductor size	UL	600 V/60 A/14...6 AWG ³⁾
Voltage/current/conductor size	CSA	600 V/65 A/14...6 AWG ³⁾

Version	Type	Cat. No.	Qty.
KrG	AP	0110020000	100
Blue KrG	AP	0110070000	100
KrS	AP	0110030000	100
PA	AP	0110060000	100
Blue PA	AP	0110080000	100
Orange PA	AP	0110080000	100
Terminal block with marking	TSch 1	0553860000	10
Terminal block without marking	TSch 1	0353160000	10

SAK 16 SAK 16/35



Width/length/height (mm)	12/50/57.5
Width/length/height (mm)	12/50/50
Insulation stripping length/clamping screw/screwdriver blade	15 mm/M 4/5.5 x 1.0

Rated voltage/current/cross-section	1000 V/76 A/16 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ²	2.5...10
Stranded H07V-R	mm ²	4...16 ²⁾
Flexible H07V-K	mm ²	4...16
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	4...16
Plug gauge according to 60 947-7-1	Size	B 6
Continuous current of terminal for conductor size		76
Continuous current rating of cross-connection 2...5-pole	A	76
Continuous current rating of cross-connection 6...10-pole	A	76

Voltage/current/conductor size	UL	600 V/80 A/12...4 AWG
Voltage/current/conductor size	CSA	600 V/87 A/10...4 AWG

Version	Type	Cat. No.	Qty.
KrG	AP	0271020000	50
Blue KrG	AP	0271020000	50
KrS	AP	0271030000	50
PA	AP	0271060000	50
Blue PA	AP	0271080000	50
Orange PA	AP	0271080000	50
Terminal block with marking	TSch 1	0380620000	50
Terminal block without marking	TSch 1	0380620000	50

End plate (thickness mm)

Type	Cat. No.	Qty.
AP	1397160000	20
AP	1397180000	20

Partition (thickness mm)

Type	Cat. No.	Qty.
TW	1058800000	20
WTW	1058800000	20
Small partition	0607000000	20
TSch 6	0190260000	100

Cross-connection

Type	Cat. No.	Qty.
Q 4	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20
QB 2	0482700000**	100
QB 3	0482800000**	50
QB 4	0482900000**	50

Cover

Type	Cat. No.	Qty.
AD 4	0303400000	50
BSKM 2.5 x18	0303300000	100

Switchable cross-connection link

Type	Cat. No.	Qty.
VL 2	0446700000	50
VH	1056500000	100
BS	0343100000	100

Marking tags

Type	Cat. No.	Qty.
DEK 6	see "Accessories"	
DEK 8	see "Accessories"	
DEK 5	see "Accessories"	

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. 1056400000
 ** 2.5 mm² conductor connection when using QB

1) Contact-proof with ADP 4 cover profile (see section "Accessories")

2) Tightening torque for 16 mm² stranded: 2 Nm

3) Tightening torque for 16 mm² and AWG6: 2 Nm

Feed-through terminals

SAK 35 N SAK 35 N/35



UL CE LR DNV

16/58/67.5
16/63/60
18 mm/M 6/6.5 x 1.2

SAK 35 SAK 35/35



UL CE KECE LR DNV

18/58/67.5
18/58/60
20 mm/M 6/6.5 x 1.2

SAK 70 SAK 70/35



UL CE LR DNV

22/75/79.5
22/75/87
24 mm/M 8/S 6 D911

SAK 95 SAK 95/35



UL CE DNV

28/83.5/100.5
28/83.5/96.5
30 mm/M 10/S 8 D6911

Dimensions/approvals

Width/length/height (mm) with TS 32 16/58/67.5
Width/length/height (mm) with TS 35 x 7.5 16/63/60
Insulation stripping length/clamping screw/screwdriver blade 18 mm/M 6/6.5 x 1.2

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section 1000 V/125 A/35 mm²
Rated impulse voltage/pollution severity 8 kV/3

Further technical data

Tightening torque range Nm 4.0...5.0/4.0...6.0***
Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U mm² 2.5...16
Stranded H07V-R mm² 2.5...50
Flexible H07V-K mm² 2.5...35
Flexible H07V-K and ferrule according to DIN 46 228/1 mm² 2.5...35
Plug gauge according to 60 947-7-1 Size B 8
Continuous current of terminal for conductor size 125 A/35 mm²
Continuous current rating of cross-connection 2...5-pole A 65
Continuous current rating of cross-connection 6...10-pole A 65

Rated data according to UL/CSA

Voltage/current/conductor size UL 600 V/100 A/12...2 AWG
Voltage/current/conductor size CSA 600 V/120 A/12...2 AWG

Ordering data

Version	Qty.	Qty.
KrG	0550620000 20	0608220000 20
Hexagon socket KrG	0555720000 20	0608320000 20
Hexagon socket Blue KrG		0608370000 20
KrS	0550630000 20	
Hexagon socket KrS	0555730000 20	
PA	0550660000 20	0608260000 20
Hexagon socket PA	0555760000 20	0608360000 20
Blue PA		

800 V/125 A/35 mm²
8 kV/3

4.0...5.0/4.0...6.0***

6...16
16...50
10...35
10...35
B 9
125 A/35 mm²
99
99

1000 V/192 A/70 mm²
8 kV/3

6.0...12.0

Strips
16 3x9x0.8
16...70 1) 6x9x0.8
16...70 1) 6x13x0.5
16...35
B 11
192 A/70 mm²
180

1000 V/232 A/95 mm²
8 kV/3

10.0...20.0

Strips
10...16 3x9x0.8
10...120 2) 6x9x0.8
10...95 2) 6x13x0.5
10...35 6x16x0.8
B 12
232 A/95 mm²
180

600 V/145 A/4...2/0 AWG
600 V/150 A/4...2/0 AWG

0340820000 10
0340870000 10
0340830000 10

600 V/100 A/6...2 AWG
600 V/145 A/6...2 AWG
600 V/150 A/4...2/0 AWG
600 V/190 A/6...3/0 AWG
600 V/260 A/6...3/0 AWG

0550520000 10 0662220000 10
0139160000 10

End plate (thickness mm)



Type	Cat. No.	Qty.
KrG	AP (3.0) 0303620000	10
Blue KrG	AP (3.0) 0303670000	10
KrS	AP (3.0) 0303630000	10
PA	AP (1.5) 0303660000	10
Blue PA	AP (3.0) 0303680000	10
Orange PA		

Type	Cat. No.	Qty.
KrG	AP (3.0) 0303620000	10
Blue KrG	AP (3.0) 0303670000	10
KrS	AP (3.0) 0303630000	10
PA	AP (1.5) 0303660000	10
Blue PA	AP (3.0) 0303680000	10

Type	Cat. No.	Qty.
KrG	AP (4.0) 0340920000	10
KrS	AP (4.0) 0340930000	10
PA	AP (2.0) 0340960000	10

Type	Cat. No.	Qty.
KrG	AP (3.0) 0550920000	10
Blue KrG	AP (3.0) 0550970000	10

Partition (thickness mm)



Type	Cat. No.	Qty.
KrG	TW (3.0) 0304320000	10
Blue KrG		
KrS	TW (3.0) 0304330000	10
PA	TW (1.5) 0304360000	10
Blue PA		

Type	Cat. No.	Qty.
KrG	TW (3.0) 0304320000	10
Blue KrG		
KrS	TW (3.0) 0304330000	10
PA	TW (1.5) 0304360000	10
Blue PA		

Type	Cat. No.	Qty.
KrG	TW (3.0) 0345300000	20
Blue KrG		
KrS	TW (3.0) 0345370000	20
PA	TW (1.5) 0345380000	20
Blue PA		

Type	Cat. No.	Qty.
KrG	TW (3.0) 0551200000	10
Blue KrG		
KrS	TW (3.0) 0407600000	10
PA	TW (1.5) 0407700000	10
Blue PA		

Cross-connection

QL 3 VH BS SS 2-pole
3-pole
4-pole
10-pole
VH 17 0267000000 50
BS M 4x30 0267100000 50
SS M 4 0136400000 100

QL 2 0564900000 50
QL 3 0565000000 50
QL 4 0565100000 50
QL 10 0565200000 20

QL 2 0123600000 20
QL 3 0123700000 20
QL 4 0123800000 20
QL 10 0338600000 20

QL 2 0345300000 20
QL 3 0167000000 20

QL 2 0551200000 10
QL 3 0407600000 10
QL 4 0407700000 10

Switchable cross-connection link

VL 2 BS VH

VL 2 0124000000 50
VH 24.5 0298700000 50
BS M 4x35 0298900000 50

VL 2 0124000000 50
VH 24.5 0298700000 50
BS M 4x35 0298900000 50

VL 2 0124000000 50
VH 24.5 0298700000 50
BS M 4x35 0298900000 50

VL 2 0124000000 50
VH 24.5 0298700000 50
BS M 4x35 0298900000 50

Cover / test plug



AD 4 0576700000 50
BSKM 4x32 0129100000 50
PS 4 0299600000 20

AD 4 0178700000 20
BSKM 4x32 0129100000 50
PS 4 0299600000 20

AD 3 0344300000 10
BSKM 5x45 0344400000 50
PS 4 0299600000 20

ADP 3 0485400000 20
PS 4 0299600000 20

Marking tags

1 2 3 4 5 6 DEK Standard

DEK 5 see "Accessories"

DEK 5 see "Accessories"

DEK 5 see "Accessories"

DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

*** For hexagon socket

1) 12 Nm for 70 mm²
2) 20 Nm for 95 mm² and 120 mm²

Feed-through terminals (spring-loaded)

RSF 3 RSF 3/35




RSF 1



RSF 2

Disconnect test terminal



Dimensions/approvals		☉	☉						
Width/length/height (mm)	with TS 32	8/50/60	11/50/60		11/77/72.5				
Width/length/height (mm)	with TS 35 x 7.5	8/50/53							
Insulation stripping length/clamping screw/screwdriver blade		12 mm	12 mm		12 mm				
Rated data									
Rated voltage/-current		630 V/32 A	500 V/57 A		500/41 A				
Rated cross-section	mm ²	4	10		6				
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV /3		6 kV/3				
Further technical data									
Tightening torque range	Nm	0.5...1.0							
Torque setting with electric screwdriver type DMS 2		2							
Clampable conductor									
Solid H07V-U	mm ²	0.5...4	0.5...10		0.75...16				
Stranded H07V-R	mm ²	0.5...4	0.5...10		0.75...10				
Rated data according to UL/CSA									
Voltage/current/conductor size	UL								
Voltage/current/conductor size	CSA								
Ordering data		Version	Qty. Qty.	Qty. Qty.	Qty. Qty.				
		PA	0497560000 50 9501160000 50						
		KrG	0497520000 50	0270320000 50	0623320000* 20 0623120000** 20				
End plate/partition/small partition		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
AP	TW	TSch 1	PA	AP (3)	0270460000	10	AP (3.0)	0301420000	10
			KrG	TW (1.5)	3877960000	10	PA		
			HP	TW (2)	3833500000	20	HP		
			HP	TW (0.5)	0474700000	20	HP		
			PA	TSch 1	0319160000	100	PA		
Cross-connection									
QL	VH	SS	2-pole	QL 2	0194300000	50	QL 2	0267400000	50
			3-pole	QL 3	0194400000	50	QL 3	0267500000	50
			4-pole	QL 4	0194500000	50	QL 4	0267600000	50
			10-pole	QL 10	0338300000	10	QL 10	0341700000	20
				VH 13.5	0248500000	100	VH 17.5	0285200000	50
BS M 3 x ...				BS M 3x20	0303000000	100	BS M 3x25	0292500000	100
				SS	0164400000	50	SS	0164400000	50
				QS 4	0369760000	10	QS 4	0369760000	10
Switchable cross-connection link									
VH 21				VH 2	0194700000	50	VH 2	0528400000	50
				VH 21	0309600000	100	VH 27	0309400000	50
				BS M 3x20	0296200000	50	BS M 3x25	0309800000	50
				SS	0164400000	50	SS	0164400000	50
Dummy plug									
	made from plastic, to keep the place of an extracted plug								
Test plug/socket									
PS				PS 2.3	0180400000	50	PS 2.4	0299600000	20
				StB 14	0168600000	50	StB 18	0286500000	20
StB		Plug-testsocket (QL cannot be used)							
Cover plate									
				ADP 2	0485300000	1	ADP 2	0485300000	1
Marking tags									
				DEK	see "Accessories"		DEK	see "Accessories"	

* with disconnecter (73 mm height)


** Disconnecter with handle (86 mm height)

Feed-through terminals for thermocouples

Busbars made from thermocouple materials according to DIN IEC 584

SAK 2.5 TC


DK 4 Q/TC



Weidmüller's **thermocouple-terminals** are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path.

This high measuring precision is necessary for, e.g. test beds, air craft engines, for complicated chemical processes, controls, etc.

I. Configuration of a temperature measuring circuit



- 1 Thermocouple (sensor)
- 2 Thermocouple terminals
- 3 Compensation conductor
- 4 Reference point
- 5 Supply conductors (to and from)
- 6 Measuring device

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device via the thermocouple.

II. Symbols Thermocouples according to IEC 584 DIN 43710

Terminal	Busbar material trade name
a) Type J	
Fe (positive leg)	Iron
CuNi (negative leg)	Constantan
b) Type T	
Cu (positive leg)	Copper
CuNi (negative leg)	Constantan
c) Type K	
NiCr (positive leg)	Chromel
Ni (negative leg)	Alumel

Dimensions/approvals		SAK 2.5 TC	DK 4 Q/TC
Width/length/height (mm)	with TS 32	6/36.5/49.5	6/54/59.5
Width/length/height (mm)	with TS 35 x 7.5		6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Technical data/VDE			
Rated voltage/current/cross-section		-/-/2.5 mm ²	-/-/4 mm ²
Tightening torque range	Nm	0.4...0.6	0.5...1

Ordering data	Version	Type	Cat. No.	Qty.
	NiCr		0107260000	100
	Ni		0107160000	100
	CuNi		0189860000	100
	Fe		0190060000	100
	Cu		0189960000	100
	NiCr/Ni	K	1284160000	1338260000
	Cu/CuNi	T	1285660000	1338160000
	Fe/CuNi	J	1284060000	1338060000

End plate (thickness mm)	Type	Cat. No.	Qty.
	KrG		
	Blue KrG		
	KrS		
	PA	AP (1.5)	0279560000 20
	Blue PA		
	Orange PA		

Partition (thickness mm)	Type	Cat. No.	Qty.
	KrG		
	Blue KrG		
	KrS		
	PA	TW (1.5)	0302860000 20
	WEM		
	for TS 32 HP		

Marking tags	Print
1 2 3 4 5 6	DEK Standard DEK 6 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"	DEK 6 see "Accessories"

SAK-series

Feed-through terminals

Terminals/Accessories

SAKG 28 I


SAKG 28 II




The Weidmüller SAKG range offers the following connection variants:

- clamping yoke/flat lug as a combination, Version I.
- flat lug, Version II.
Two types of threading are provided here.
a) screw set with lock nut
b) with thread in busbar
- clamping yoke connection, Version III.
The stripped conductor can be connected without further preparation.

Versions




Version I



Version II
without thread



Version II G
with thread




Version III

Cables with cable lugs are connected to SAKG terminals of Version I and to SS stud terminals.

Fitting instructions for SAKG terminals

When tightening the clamping screw, it is recommended that the conductor be held against the direction of tightening to prevent deformation of the mounting rail and so as not to place the terminal foot under undue torsional forces.

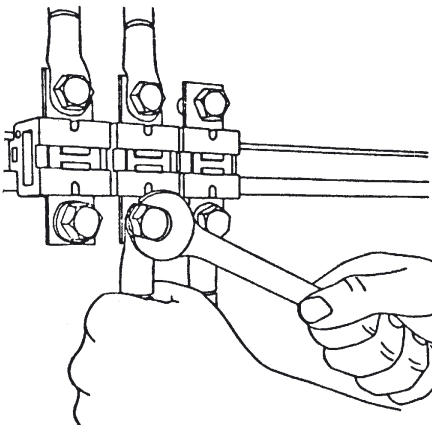

Cover

To ensure shock protection following connections of **conductors**, AH covers can be clipped onto the terminal.

Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	1000 V*/125 A/35 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm	3...6
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Solid H07V-U	mm ²	6...35
Stranded H07V-R	mm ²	6...35
Flexible H07V-K	mm ²	10...35
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	6...35
Plug gauge according to 60 947-7-1	Size	B 9
Continuous current of terminal for conductor size		125 A/35 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 125
Continuous current rating of cross-connection 6...10-pole	A	(QL 2) 125

Rated data according to UL/CSA

Voltage/current/conductor size	UL	600 V/95 A/2 AWG
Voltage/current/conductor size	CSA	600 V/110 A/6...1 AWG

Ordering data

Type		Cat. No.	Qty.
KrG		0170020000	10

UL @

28/70/63.5

15 mm/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

6...35

6...35

10...35

6...35

B 9

125 A/35 mm²

(QL 2) 125

600 V/95 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No. Qty.

0170020000 10

UL @ DNV

28/70/53

-/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

125 A/35 mm²

(QL 2) 125

600 V/115 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No. Qty.

0170320000 10

End plate, hard paper

	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10



	Cat. No.	Qty.
	0180700000, 0205300000	
	0180800000, 0205400000	tropic-proof



Partition, hard paper (thickness in mm)

	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10



	Cat. No.	B/L/H (incl. TS 32) mm	2/120/75.5
	Cat. No.	B/L/H (incl. TS 35) mm	2/120/75.5



Cross-connection

	2-pole	QL 2	0193900000	5
	3-pole	QL 3	0407600000	5
	4-pole	QL 4	0407700000	5



Cover

	AH 28	0326660000	5
--	-------	-------------------	---



Marking tags

	1 2 3 4 5 6	DEK	Standard
--	-------------	-----	----------

DEK 5 see "Accessories"

DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 28 II G



28/70/53
-/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
125 A/35 mm ²
(QL 2) 125

	Cat. No.	Qty.
	0185020000	10

	Cat. No.	Qty.
	0205100000	10
	0205200000	10

	Cat. No.	Qty.

	Qty.
	0151400000 10
	0164600000 10

2/120/75.5

QL 2	0193900000	5
QL 3	0407600000	5
QL 4	0407700000	5

AH 28	0326660000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 28 III



28/70/63.5
15 mm/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
B 9

600 V/95 A/2 AWG	600 V/135 A/8...2 AWG	
	Cat. No.	Qty.
	0170820000	10

	Cat. No.	Qty.
	0205100000	10
	0205200000	10

	Cat. No.	Qty.

	Qty.
	0151400000 10
	0164600000 10

2/120/75.5

AH 28	0326660000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 I SAKG 32/35 I



32/87/84
32/87/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²
(QL 2) 150

600 V/165 A/3 AWG	600 V/170 A/1...2/0 AWG		
	Qty.		Qty.
	0286620000		0637120000

	Cat. No.	Qty.
	0205300000	10
	0205400000	10

	Cat. No.	Qty.
	0180700000	10
	0180800000	10

	Qty.
	0177100000 10
	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II SAKG 32/35 II



32/80/53
32/80/51
-/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
150 A/50 mm ²
(QL 2) 150

600 V/200 A/3 AWG	600 V/170 A/1...2/0 AWG		
	Qty.		Qty.
	0170420000		0637320000

	Cat. No.	Qty.
	0205100000	10
	0205200000	10

	Cat. No.	Qty.
	0180700000	10
	0180600000	10

	Qty.
	0151400000 10
	0164600000 10

2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II G SAKG 32/35 II G



	DNV
32/80/53	
32/80/53	
-/M 8/-	
1000 V*/150 A/50 mm ²	
8 kV/3	
6...12	
150 A/50 mm ²	
(QL 2) 150	

600 V/170 A/1...2/0 AWG			
	Qty.		Qty.
	0185120000		0637420000

	Cat. No.	Qty.
	0205100000	10
	0205200000	10

	Cat. No.	Qty.
	0180700000	10
	0180600000	10

	Qty.
	0151400000 10
	0164600000 10


2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 III SAKG 32/35 III



32/94/84
32/94/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²

600 V/165 A/3 AWG	600 V/185 A/1...2/0 AWG		
	Qty.		Qty.
	0286720000		0637220000

	Cat. No.	Qty.
	0205300000	10
	0205400000	10

	Cat. No.	Qty.
	0180700000	10
	0180800000	10

	Qty.
	0177100000 10
	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary
 ** For Cat. No. **0180600000** and **0180700000**: length = 160 mm.

Feed-through terminals

SAKG 70 II G SAKG 70/35 II G



Ⓢ Ⓡ Ⓡ Ⓡ DNV

Width/length/height (mm)	with TS 32	32/84/54
Width/length/height (mm)	with TS 35 x 7.5	32/84/53
Insulation stripping length/clamping screw/screwdriver blade		-/M 8/-

Dimensions/approvals

Width/length/height (mm)	with TS 32	32/84/54
Width/length/height (mm)	with TS 35 x 7.5	32/84/53
Insulation stripping length/clamping screw/screwdriver blade		-/M 8/-

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section		1000 V*/192 A/70 mm ²
Rated impulse voltage/pollution severity		8 kV/3

Further technical data

Tightening torque range	Nm	6...12
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Solid H07V-U	mm ²	
Stranded H07V-R	mm ²	10...95
Flexible H07V-K	mm ²	10...95
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	10...35
Plug gauge according to 60 947-7-1	Size	B 12
Continuous current of terminal for conductor size		192 A/90 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 192
Continuous current rating of cross-connection 6...10-pole	A	


Rated data according to UL/CSA

Voltage/current/conductor size	UL	
Voltage/current/conductor size	CSA	600 V/200 A/2/0...4/0 AWG

Ordering data

Version		
KrG		0150420000 10 0636620000 10

SAKG 40 I SAKG 40/35 I



Ⓢ Ⓡ Ⓡ Ⓡ

Width/length/height (mm)		40/95/84
Width/length/height (mm)		46/95/85.5
Insulation stripping length/clamping screw/screwdriver blade		27 mm/M 10/-

SAKG 40 II SAKG 40/35 II



Ⓢ Ⓡ Ⓡ Ⓡ DNV

Width/length/height (mm)		40/90/53
Width/length/height (mm)		46/90/53
Insulation stripping length/clamping screw/screwdriver blade		-/M 10/-

SAKG 40 II G SAKG 40/35 II G



Ⓢ Ⓡ Ⓡ Ⓡ

Width/length/height (mm)		40/90/55
Width/length/height (mm)		46/90/55
Insulation stripping length/clamping screw/screwdriver blade		-/M 10/-

Rated voltage/current/cross-section		1000 V*/232 A/95 mm ²
Rated impulse voltage/pollution severity		8 kV/3

Tightening torque range	Nm	10...20
Torque setting with electric screwdriver type DMS 2		

Solid H07V-U	mm ²	10...95
Stranded H07V-R	mm ²	10...95
Flexible H07V-K	mm ²	10...95
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	10...35
Plug gauge according to 60 947-7-1	Size	B 12
Continuous current of terminal for conductor size		232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 232
Continuous current rating of cross-connection 6...10-pole	A	

Voltage/current/conductor size	UL	600 V/195 A/4/0 AWG
Voltage/current/conductor size	CSA	600 V/250 A/2/0...4/0 AWG

Version		
KrG		0170520000 10 0637720000 5

End plate, hard paper (thickness mm)

0205100000, 0180500000		
0205200000, 0180600000	tropic-proof	

EP 1 (2)	Cat. No.	Qty.
	0205100000	10
EP 1 (2)	0205200000	10

0180700000, 0205300000		
0180800000, 0205400000	tropic-proof	

EP 1/35 (2)	Cat. No.	Qty.
	0180500000	10
EP 1/35 (2)	0180600000	10

Partition, hard paper (thickness mm)

0151400000		
0164600000	tropic-proof	

TW 1 (2)	Cat. No.	Qty.
	0151400000	10
TW 1 (2)	0164600000	10

0177100000	B/L/H (incl. TS 32) mm	2/120/75.5
0179900000	B/L/H (incl. TS 35) mm	2/120/75.5

2/160/90.5		
2/160/90.5		

Cross-connection

2-pole, QL 2		
3-pole, QL 3		
4-pole, QL 4		

0194000000	Qty.	10
0441500000	Qty.	10
0441600000	Qty.	10

0194100000	Qty.	10
0263500000	Qty.	10
0409800000	Qty.	10

0194100000	Qty.	10
0263500000	Qty.	10
0409800000	Qty.	10

0194100000	Qty.	10
0263500000	Qty.	10
0409800000	Qty.	10

0194100000	Qty.	10
0263500000	Qty.	10
0409800000	Qty.	10

0194100000	Qty.	10
0263500000	Qty.	10
0409800000	Qty.	10

AH 32	Qty.	5
AH 40	Qty.	5

AH 40	Qty.	5
AH 40	Qty.	5

AH 40	Qty.	5
AH 40	Qty.	5

AH 40	Qty.	5
AH 40	Qty.	5

Marking tags

1 2 3 4 5 6	DEK	Standard
DEK 5		see "Accessories"

DEK 5		see "Accessories"
DEK 5		see "Accessories"

DEK 5		see "Accessories"
DEK 5		see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

*During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 40 III
SAKG 40/35 III



UL @ 3 4
40/100/84
46/100/85.5
27 mm/M 10/-
1000 V*/232 A/95 mm ²
8 kV/3
10...20
10...95
10...95
10...95
10...35
B 12
232 A/95 mm ²

600 V/195 A/4/0 AWG
600 V/230 A/2/0...4/0 AWG
Qty. Qty.
0286920000 10 0637620000 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 40	0326860000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II
SAKG 46/35 II



UL @ 3 4
46/106/55
46/106/54.5
-/M 12/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31
309 A/150 mm ²

600 V/285 A/4/0 AWG
600 V/365 A/300 MCM
Qty. Qty.
0170620000 10 0637920000 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II G
SAKG 46/35 II G



@ 3 4 DNV
46/106/57.5
46/106/57
-/M 12/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31
309 A/150 mm ²
(QL 2) 309

600 V/285 A/4/0 AWG
600 V/365 A/300 MCM
Qty. Qty.
0185320000 10 0638020000 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10


2/160/90.5
2/160/90.5

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II
SAKG 54/35 II



UL @ 3 4
54/122/57
54/122/57
-/M 16/-
1000 V*/415 A/240 mm ²
8 kV/3
25...60
415 A/240 mm ²
(QL 2) 415

600 V/380 A/500 MCM
600 V/600 A/300...500 MCM
Qty. Qty.
0170720000 10 0638120000 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10


TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II G
SAKG 54/35 II G



UL @ 3 4 DNV
54/122/60
54/122/60
-/M 16/-
1000 V*/415 A/240 mm ²
8 kV/3
25...60
415 A/240 mm ²
(QL 2) 415

600 V/380 A/500 MCM
600 V/600 A/300...500 MCM
Qty. Qty.
0185420000 10 0638220000 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10


TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

DEK 5	see "Accessories"
-------	-------------------

SAKG 46/I AL
SAKG 46/II AL



46/112/74
23 mm/M 12/M 14/-
1000 V*/309 A/150 mm ²
8 kV/3
14...31/25...40
50...240
35...185

Qty. Qty.
1287920000** 5

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
-------------	----------	------

TW 2 (2)	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 46	0326960000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------


SAK-series

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.
** Suitable for connection of 1 aluminium conductor of max 185 mm²

*** Suitable for connection of 2 aluminium conductors of max. 185 mm²

Stud terminals


SS 6 SS 6/35




KST 5 KST 5/35



KST 6 KST 6/35



KST 8 KST 8/35



Dimensions/approvals		SS 6	KST 5	KST 6	KST 8
Width/length/height (mm)	with TS 32	18/40/62	24/60/55	24/60/62	24/60/72
Width/length/height (mm)	with TS 35 x 7.5	18/49.5/54.5	24/62.5/49.5	24/62.5/54.5	24/62.5/64.5
Insulation stripping length/clamping screw/screwdriver blade		-/M 6/-	-/M 5/-	-/M 6/-	-/M 8/-
Rated data					
Rated voltage/current/cross-section		1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /57 A/10 mm ²	1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /125 A/35 mm ²
Rated impulse voltage/pollution severity		6 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data					
Tightening torque range	Nm	3...6	2...4	3...6	6...12
Torque setting with electric screwdriver type DMS 2					
Clampable conductor					
Solid H07V-U	mm ²				
Stranded H07V-R	mm ²				
Flexible H07V-K	mm ²				
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²				
Plug gauge according to 60 947-7-1	Size				
Continuous current of terminal for conductor size		82 A/16 mm ²	65 A/10 mm ²	82 A/16 mm ²	135 A/35 mm ²
Continuous current rating of cross-connection 2...5-pole	A			200	200
Continuous current rating of cross-connection 6...10-pole	A				
Rated data according to UL/CSA					
Voltage/current/conductor size	UL	600 V/85 A/12...4 AWG	600 V/50 A/12...6 AWG	600 V/65 A/12...6 AWG	600 V/115 A/12...2 AWG
Voltage/current/conductor size	CSA	600 V/65 A/6 AWG			
Ordering data		Version	Qty.	Qty.	Qty.
	KrG	0498220000 25	0649820000 25		
	PA		9503370000 25		9501320000 25
	PPO				
	KrG				
	for TS 35 x 7.5	PA	9508230000 25	9506940000 25	9506950000 25
	for TS 35 x 15/2.3	PA	9528300000 25	9528310000 25	9528320000 25
Partition, (thickness mm)		Cat. No.	Qty.		
	PA	TW SS6 (TS32)	0455860000 10		
	Hard paper	TW-GW2 (TS35)	0607100000 20		
	HM		TW right	1718530000 10	TW right
	HM		TW left ²⁾	1752800000 10	TW left
				TW right	1718530000 10
				TW left	1752800000 10
	Width/length/height (incl. TS 32) mm	2/129/93	2/160/83.5	2/160/83.5	2/160/83.5
	Width/length/height (incl. TS 35) mm	2/70/62.5	2/160/78.5	2/160/78.5	2/160/78.5
Cross-connection					
	2-pole	QL 2	0284300000 20	QL 2	9503390000 1
	3-pole	QL 3	0279000000 20	QL 2	9501350000 5
				QL 2	9501360000 1
Marking tags		Print			
	DEK	Standard	DEK 5	see "Accessories"	DEK 5
	Standard		DEK 5	see "Accessories"	DEK 5
			DEK 5	see "Accessories"	DEK 5
			DEK 5	see "Accessories"	DEK 5
Mounting rails, end brackets, further marking material see "Accessories"					


^{*} Depends on cable lug

¹⁾ with partition

²⁾ Left AP is required only once at beginning of terminal strip

Stud terminals

KST 10
KST 10/35



34/60/82			34/60/82		
34/62.5/74.5			34/62.5/74.5		
-/M 10/-			-/M 12/-		
1000 V ¹⁾ /192 A/70 mm ²			1000 V ¹⁾ /232 A/95 mm ²		
8 kV/3			8 kV/3		
10...20			14...31		
207 A/70 mm ²			250 A/95 mm ²		
200			200		
600 V/175 A/12...2/0			600 V/200 A/12...3/0		
	Qty.		Qty.		Qty.
9501330000	20				
9506960000	20	9506970000	20		
9528330000	20	9528340000	20		
TW right	1718530000	10	TW right	1718530000	10
TW left	1752800000	10	TW left	1752800000	10
2/160/83.5			2/160/83.5		
2/160/78.5			2/160/78.5		
QL 2	9501370000	1	QL 2	9501380000	1
DEK 5	see "Accessories"		DEK 5	see "Accessories"	

PE terminals

EK 2.5 N EK 2.5/35



EK 4 EK 4/35



EK 6/35



EK 10 EK 10/35



Dimensions/approvals

Width/length/height (mm)	with TS 32	6/36.5/49.5	8/40/51.5	8/56/44	10/40/51.5
Width/length/height (mm)	with TS 35 x 7.5	6/56/40	6.5/56/44	8/56/44	10/56/44
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6	12 mm/M 3/3.5 x 0.6	12 mm/M 3.5/4.0/0.8	12 mm/M 4/5.5 x 1.0
Rated data according to IEC 60 947-7-2					
Rated voltage/current with PEN/cross-section		-/-/2.5 mm ²	-/-/4 mm ²	-/-/6 mm ²	-/-/10 mm ²
Rated voltage/rated impulse voltage acc. to VDE 0110/1.89/ pollution severity					

Further technical data

Tightening torque range	Nm	0.4...0.8/0.5...1.0*	0.5...1.0/0.5...1.0*	1.2...1.6/0.5...1.0*	1.2...2.4/0.5...1.0*
-------------------------	----	----------------------	----------------------	----------------------	----------------------

Clampable conductor

Solid H07V-U	mm ²	0.5...4	0.5...6	0.5...10	0.5...10
Stranded H07V-R	mm ²	0.5...2.5	0.5...4	1.5...6	1.5...6
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...10	0.5...10
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5	0.5...4	0.5...6	0.5...10
Cable AWG	Nr.	22...14	22...10	20...8	20...8
Plug gauge according to 60 947-7-1	Size	A 3	A 4	A 5	B 6

Ordering data

Version		Qty.		Qty.		Qty.		Qty.
Green/yellow PA		100		100		100		100
Blank								
Two clamping yokes blank								
Hexagon socket blank								

Support block



For insulation of mounting rails
in insulated-earth installations

Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
SH 2	0494920000	10	SH 2	0494920000	10	SH 2	0494920000	10	SH 2	0494920000	10

SK - key, 8mm

Marking tags


	DEK	Standard	Print
	1 2 3 4 5 6	DEK 6	see "Accessories"
		DEK 6.5	see "Accessories"
		DEK 8	see "Accessories"
		DEK 5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* For centre screw


Fuse terminals

ASK 1¹⁾ ASK 1/35¹⁾



Width/length/height (mm) with TS 32	8/58/45,5
Width/length/height (mm) with TS 35 x 7.5	8/58/44
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/6.3 A ²⁾ /4 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2	2
Clampable conductor	
Solid H07V-U mm ²	0.5...4
Stranded H07V-R mm ²	1.5...4
Flexible H07V-K mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²	0.5...4
Plug gauge according to 60 947-7-1 Size	A 3
Continuous current rating of cross-connection 2...5-pole A	(QB 2...4) 10
Continuous current rating of cross-connection 6...10-pole A	

KDKS 1¹⁾ KDKS 1/35¹⁾




Width/length/height (mm) with TS 32	8/73.5/59,8
Width/length/height (mm) with TS 35 x 7.5	8/73.5/55,7
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/6.3 A/4 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2	2
Clampable conductor	
Solid H07V-U mm ²	0.5...4
Stranded H07V-R mm ²	
Flexible H07V-K mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²	0.5...4
Plug gauge according to 60 947-7-1 Size	A 4
Continuous current rating of cross-connection 2...5-pole A	(QB 2...4) 10
Continuous current rating of cross-connection 6...10-pole A	

SAKS 1 SAKS 1/35



Width/length/height (mm) with TS 32	13/54/61
Width/length/height (mm) with TS 35 x 7.5	13/54/54
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1.0
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/6.3 A ³⁾ /10 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range Nm	1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U mm ²	0.5...16
Stranded H07V-R mm ²	1.5...10
Flexible H07V-K mm ²	0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²	0.5...10
Plug gauge according to 60 947-7-1 Size	B 6
Continuous current rating of cross-connection 2...5-pole A	(QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole A	(QL 6...10) 36

SAKS 1/G25 SAKS 1/35/G25



Width/length/height (mm) with TS 32	13/54/61
Width/length/height (mm) with TS 35 x 7.5	13/54/54
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1.0
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/6.3 A ³⁾ /10 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range Nm	1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U mm ²	0.5...16
Stranded H07V-R mm ²	1.5...10
Flexible H07V-K mm ²	0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²	0.5...10
Plug gauge according to 60 947-7-1 Size	B 6
Continuous current rating of cross-connection 2...5-pole A	(QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole A	(QL 6...10) 36

Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data/feed through-terminal base

Rated voltage/current/cross-section	
Rated impulse voltage/pollution severity	

Further technical data

Tightening torque range Nm	
Torque setting with electric screwdriver type DMS 2	

Clampable conductor

Solid H07V-U mm ²	
Stranded H07V-R mm ²	
Flexible H07V-K mm ²	
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²	
Plug gauge according to 60 947-7-1 Size	
Continuous current rating of cross-connection 2...5-pole A	
Continuous current rating of cross-connection 6...10-pole A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/6.3 A/12 max. AWG
Voltage/current/conductor size	CSA	300 V/6.3 A/26...12 AWG

Ordering data

Version	PA	Qty.	
	KrG	Qty.	
	Beige Wemid	Qty.	

End plate/partition (thickness mm)



Type	Cat. No.	Qty.
AP (1.5)	0380360000	20

Type	Cat. No.	Qty.
AP 1 KDKS	9503330000	25
Wemid	9532470000	25
for TW (2.0)		

Type	Cat. No.	Qty.
AP (2.5)	0191320000	20
Wemid beige	0191300000	20
for TW (2.0)		

Type	Cat. No.	Qty.
AP (2.5)	0191320000	20
Wemid-beige	0191300000	
for TW (2.0)		

G-fuse inserts

Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1) rated current (A):	0.10 fast	0430300000	10
Rated voltage 250 V	0.20 fast	0430400000	10
Fast switching capacity 1500 A	0.25 fast	0430500000	10
(at 250 V, 50 Hz, cos φ = 0.7)	0.50 fast	0430600000	10
	1.0 fast	0430700000	10
	1.6 fast	0430800000	10
	2.0 fast	0430900000	10
	2.5 fast	0431000000	10
	3.15 fast		
	4.0 fast		
	5.0 fast		
	6.3 fast		

5 x 20 mm	
5 x 20 mm	

5 x 20 mm	
5 x 20 mm	

5 x 25 mm		
0.25 (m)	0546900000	10
0.5 (m)	0510300000	10
0.8 (m)	0646400000	10
1 (m)	0265800000	10
10 (m)	0193100000	10
2 (f)	0192700000	10
4 (f)	0192800000	10
6.3 (f)	0192900000	10

Contact sleeve

Contact sleeve	0553300000	100
----------------	------------	-----

Contact sleeve

Contact sleeve	0553300000	100
----------------	------------	-----

Screw cap/disconnector lever (spare)

TH	0377060000	100
SIHA	1593020000	100

TH	0377060000	100
SIHA	1593020000	100

SK (5 x 20)	0282100000	20
-------------	------------	----

SK (5 x 25)	0282000000	20
-------------	------------	----

Marking tags

Red pull lever	Print	
DEK	Standard	DEK 8 see "Accessories"

DEK 8	see "Accessories"
-------	-------------------

DEK 5	see "Accessories"
-------	-------------------


DEK 5	see "Accessories"
-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Multipole interruptable with group marking carrier
Sch2 2-pole Cat. No. 1359500000, 1000 mm Cat. No. 0337400000

Fuse terminals

KSKM 1 KSKM 1/35



13/69/62
13/69/63
12 mm/-/-

250 V/6.3 A¹⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/10 A/22...8 AWG

Qty. Qty.

9509570000 20 9509600000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20


5 x 20 mm

0.10 (f)	0430300000	10
0.20 (f)	0430400000	10
0.25 (f)	0430500000	10
0.50 (f)	0430600000	10
1.00 (f)	0430700000	10
1.60 (f)	0430800000	10
2.00 (f)	0430900000	10
2.50 (f)	0431000000	10
3.15 fast	0431100000	10
4.0 fast	0431200000	10
5.0 fast	0431300000	10
6.3 fast	0431400000	10

5 x 20 SBL 0446100000 40

DEK 5 see "Accessories"

KSKM 2 KSKM 2/35



13/69/62
13/69/63
12 mm/-/-

250 V/13 A²⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509580000 20 9509610000 20


Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 x 1/4"

1 x 1/4" SBL 0446200000 40

DEK 5 see "Accessories"

KSKM 3 KSKM 3/35



13/69/62
13/69/63
12 mm/-/-

440 V/10 A/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509620000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 1/4 x 1/4"

E 2 A	0294500000	10
E 3 A	0295700000	10
E 5 A	0294600000	10
E 7 A	0295800000	10
E 10 A	0293900000	10


1 1/4 x 1/4" SBL 0446300000 40

DEK 5 see "Accessories"

¹⁾ Max. fuse rating according to DIN 41 660, IEC 127 CEE4 Type 1
²⁾ Fuse according to BS 1362

Fuse terminals

SAKS 3 SAKS 3/35




Width/length/height (mm) with TS 32	13/54/61
Width/length/height (mm) with TS 35 x 7.5	13/54/55
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/10 A/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 1.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

SAKS 4 SAKS 4/35



Width/length/height (mm)	24/75/73
Width/length/height (mm)	24/75/66
Insulation stripping length/clamping screw/screwdriver blade	14 mm/M 4/5.5 x 1
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	400 V**/16 A/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 1.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

SAKS 5 SAKS 5/35



Width/length/height (mm)	28/80/80.5
Width/length/height (mm)	28/80/66
Insulation stripping length/clamping screw/screwdriver blade	13 mm/M 4/5.5 x 1
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	400 V/63 A***/16 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U	mm ² 1.5...16
Stranded H07V-R	mm ² 1.5...16
Flexible H07V-K	mm ² 1.5...16
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 1.5...16
Plug gauge according to 60 947-7-1	Size B 7
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

SAKS 2 SAKS 2/35



Width/length/height (mm)	28/80/81.5
Width/length/height (mm)	28/80/75
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1
Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/10 (25) A***/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4
Clampable conductor	
Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 0.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data/feed through-terminal base

Rated voltage/current/cross-section	500 V/10 A/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Clampable conductor

Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 1.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/22...10 AWG
Voltage/current/conductor size	CSA	600 V/10 A/22...10 AWG

Ordering data

Version		Qty.		Qty.
KrG	0248920000 ³⁾	20	0667520000 ³⁾	20
KrG	0297520000 ⁴⁾	20	0328920000 ⁴⁾	20

End plate/partition (thickness mm)

Type	Cat. No.	Qty.
PA (2.5)	0191320000	
HP for		
TW (2.0)	0607000000	

Cross-connection

QL	
SS	

Fixing screws for cross-connections

Fuse inserts	
1 1/4" x 1/4"	Nominal current (A): 0.5 fast
	1.0 fast
	2.0 fast
	3.0 fast
	5.0 fast
	7.0 fast
	10.0 fast

G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).

Available from Wickmann-Werke GmbH, Annastr. 113, 58453 Witten, Germany, Phone ++492302/6620

D fuse inserts

Fuse insert	
E 0.5 A	0533800000
E 1 A	0525500000
E 2 A	0294500000
E 3 A	0295700000
E 5 A	0294600000
E 7 A	0295800000
E 10 A	0293900000

Screw cap (spare)

red	SK (5 x 30)	0282000000	20
black	SK (1/4"x1 1/4")	0428900000	20

Marking tags

	DEK	Standard	DEK 5	see "Accessories"
--	-----	----------	-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ only for TS 32

²⁾ Also for 440 V- with neozed marina fuse
³⁾ Current for overload up to 10 A, for short circuit up to 25 A

³⁾ For fuse inserts 1 1/4" x 1/4" DEF 63
⁴⁾ For fuse inserts 5 x 30

Fuse terminals

SAKS 4 USA



UL				
24/75/73				
24/75/66				
14 mm/M 4/5.5 x 1				
400 V/30 A/10 mm ²				
6 kV/3				
1.2...2.4				
4				
0.5...16				
1.5...10				
0.5...10				
0.5...10				
B 6				
(QL 2...5) 47				
(QL 6...10) 36				
600 V/30 A/20...8 AWG				
600 V/30 A/22...8 AWG				
<table border="1"> <tr> <th>Qty.</th> <th>Qty.</th> </tr> </table>			Qty.	Qty.
Qty.	Qty.			
0162220000 20 0178220000 20				
10.3 x 38,1				
Type	Cat. No.	Qty.		
TW HP (2.0)	0607000000	20		
QL 2	0328000000	20		
QL 3	0328100000	20		
QL 4	0328200000	20		
QL 10	0339000000	20		
SS M 4	0136400000	100		
BS M 4 x 9	0103300000	100		
SK (w. spring)	0161730000	20		
DEK 5	see "Accessories"			


Fuse terminals with fault indicator



Dimensions/approvals	
Terminal width (+ 0.2 assembly tolerance)	mm 8
Insulation stripping length	mm 9
Connection data	
Screw connection, solid	
Screw connection, flexible/ferrule with/without plastic collar	
Conductor cross-section	
VDE rated data	
Current	6.3 A
Voltage	24...230 V (depending on terminal)
LED-current (24...60 V)	≤ 2 mA
LED-current (115...230 V)	≤ 2 mA
LED-current (24...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	4 mm ²
Ordering data	
24 V~	ASK 1 LD 8050810000 25
24 V~	ASK 1 LD 0222760000 25
48 V~	ASK 1 LD 0225260000 25
60 V~	ASK 1 LD 0226460000 25
115 V~	ASK 1 LD 0225460000 25
230 V~	ASK 1 LD 0225660000 25
24 V~	ASK 1 LD 0222860000 25
48 V~	ASK 1 LD 0225360000 25
60 V~	ASK 1 LD 0226360000 25
115 V~	ASK 1 LD 0225560000 25
230 V~	ASK 1 LD 0225760000 25
Mountable on TS 32 and TS 35	
Accessories	
Mounting rail	TS 32 0122800000
	TS 35x7.5 0383400000
	TS 35x15 0498000000
End brackets (thickness mm)	EWK 1 0206160000 50
	EW 35 0383560000 50
End plate/End plate (thickness mm)	AP PA (1.5) 0380360000 20
Cross-connections	
Type 'QL'	
Cross-connection	QB 2 ¹⁾ 0461100000 100
Type 'QB'	QB 3 ¹⁾ 0461200000 50
	QB 4 ¹⁾ 0461300000 50
	QB 58 ¹⁾ 0545400000
	QB 58 ¹⁾ 0545300000
Fixing screw (fits QL)	
Disconnect lever (spare)	TH (spare) 0377060000 100
Mounting rails, end brackets, further marking material see "Accessories"	

¹⁾When using QB, the rated cross-current reduces to max. 2.5 mm²

ASK 1 LD




Warning:
In the event of a faulty fuse, the connection system is live!

UL		
8		
9		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
6.3 A		
24...230 V (depending on terminal)		
≤ 2 mA		
≤ 2 mA		
4 mm ²		
Type	Cat. No.	Qty.
ASK 1 LD	8050810000	25
ASK 1 LD	0222760000	25
ASK 1 LD	0225260000	25
ASK 1 LD	0226460000	25
ASK 1 LD	0225460000	25
ASK 1 LD	0225660000	25
ASK 1 LD	0222860000	25
ASK 1 LD	0225360000	25
ASK 1 LD	0226360000	25
ASK 1 LD	0225560000	25
ASK 1 LD	0225760000	25
Mountable on TS 32 and TS 35		
Accessories		
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1	0206160000	50
EW 35	0383560000	50
AP PA (1.5)	0380360000	20
QB 2 ¹⁾	0461100000	100
QB 3 ¹⁾	0461200000	50
QB 4 ¹⁾	0461300000	50
QB 58 ¹⁾	0545400000	
QB 58 ¹⁾	0545300000	
TH (spare)	0377060000	100

KDKS 1

Fuse insert 5x20



Warning:
In the event of a faulty fuse, the connection system is live!

UL		
8		
9		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
6.3 A		
24...230 V (depending on terminal)		
≤ 2 mA		
≤ 2 mA		
4 mm ²		
Type	Cat. No.	Qty.
KDKS 1	8146450000	25
KDKS 1	8148930000	25
KDKS 1	8148920000	25
KDKS 1	8142840000	25
KDKS 1	8148910000	25
Mountable on TS 32 and TS 35		
Accessories		
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1	0206160000	50
EW 35	0383560000	50
AP PA (1.5)	0380360000	20
QB 2 ¹⁾	0461100000	100
QB 3 ¹⁾	0461200000	50
QB 4 ¹⁾	0461300000	50
QB 58 ¹⁾	0545400000	
QB 58 ¹⁾	0545300000	
TH (spare)	0377060000	100

SAK-series

Fuse terminals

with fault indicator




Dimensions/approvals	
Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Ordering data		Voltage
Fuse insert		
5 x 20	LED	24 V~
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)		
without indicator		24 V~
		48 V~
		48 V=
	Incandescent lamp	24 V=
		48 V=
	Neon lamp	115 V=
		230 V=
Fuse insert		
5 x 25	LED	24 V~
Acc. to DIN 41576		
without indicator		48 V=
	Incandescent lamp	48 V=
	Neon lamp	115 V=
		230 V=

Accessories	
Mounting rail	
End brackets (thickness mm)	for TS 32 for TS 35
End plate (thickness mm)	
Cross-connection	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Screw cap (spare)	
Neon lamp	

SAKS 1

Fuse insert 5x20/5x25



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 1 LD		
SAKS 1 LD	0371420000	10 0225820000 10
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)	1111220000	10 1111320000 10
without indicator		
		0214020000 10
SAKS 1 GL		
SAKS 1 GL	0173220000	10
	0378920000	10
SAKS 1 GL		
SAKS 1 GL	0385320000	10 8068330000 10
	0306120000	10 0199920000 10
SAK 1 LD		
SAK 1 LD		on demand
SAKS GL		
SAKS GL		on demand
SAKS 1 GL		
SAKS 1 GL	0309320000	10 0198620000 10

Type	Cat. No.	Qty.
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1 (8.5)	0206160000	50
EW 35 (8.5)	0383560000	50
AP KrG (3)	0191320000	20
SK (5 x 20)	0282100000	20
SK (5 x 25)	0282000000	100

SAKS 4

Fuse insert E14/D 01
(e.g. Neozed D 01)



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 4		
SAKS 4		
TS 32 Neon lamp		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50

SAKS 6

Fuse insert 11/4" x 1/4"
acc. to DEF 63



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 6 KrG		
SAKS 6 KrG	0531820000	40
for 1 1/4" x 1/4" acc. to DEF 63		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10
exchangeable neon lamps (please order separately)		

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG	0146720000	20
QL 2	0191400000	50
QL 3	0191500000	50
QL 4	0191600000	20
QL 10	0338800000	20
BSM 3x6 m.SS	0346200000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

SAKS 7

Fuse insert 5x20/5x25



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 7 KrG		
SAKS 7 KrG	0576120000	40
for 5 x 25		
SAKS 7 KrG		
SAKS 7 KrG	0573120000	40
for 5 x 20		
exchangeable neon lamps (please order separately)		

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG (3)	0146720000	20
QL 2	0207800000	20
QL 3	0207900000	20
QL 4	0208000000	20
QL 10	0338900000	20
BSM 4x9 m.SS	0133300000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

Fuse inserts and gauge rings for Weidmüller fuse terminals




Fuse inserts

for terminal type	Size (mm)	Rated voltage (V)	Rated current (A)	Type	Cat. No.	Qty.			
G fuse inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 Bl 1)									
SAKS 1	5 x 20 Breaking capacity 1500 A (at 250 V, 50 Hz, cos φ = 0.7)	250	0.1 (F)	G 20/0.10A/F	0430300000	10			
SAKS 7			0.2 (F)	G 20/0.20A/F	0430400000	10			
ASK 1			0.25 (F)	G 20/0.25A/F	0430500000	10			
WSI 6 			0.5 (F)	G 20/0.50A/F	0430600000	10			
			0.63 (F)	G 20/0.63A/F	0430900000	10			
			1.0 (F)	G 20/1.00A/F	0430700000	10			
			1.6 (F)	G 20/1.60A/F	0430800000	10			
			2.0 (F)	G 20/2.00A/F	0430900000	10			
			2.5 (F)	G 20/2.50A/F	0431000000	10			
			3.15 (F)	G 20/3.15A/F	0431100000	10			
			4.0 (F)	G 20/4.00A/F	0431200000	10			
			5.0 (F)	G 20/5.00A/F	0431300000	10			
			6.3 (F)	G 20/6.30A/F	0431400000	10			
G fuse inserts 5 x 25 with indicator acc. to DIN 41576¹⁾									
SAKS 1	5 x 25 m. K.1) Breaking capacity 80 A (at 250 V, 50 Hz, cos φ = 1)	250	0.25 (M)	G 25/0.25A/M	0546900000	10			
SAKS 7			0.5 (M)	G 25/0.50A/M	0510300000	10			
WSI 6 			0.8 (M)	G 25/0.80A/M	0646400000	10			
			1 (M)	G 25/1.00A/M	0265800000	10			
			10 (M) ⁵⁾	G 25/10.0A/M	0193100000	10			
			2 (F)	G 25/2.00A/F	0192700000	10			
			4 (F)	G 25/4.00A/F	0192800000	10			
			6.3 (F)	G 25/6.30A/F	0192900000	10			
			Fuse inserts 1 1/4" x 1/4" without indicator acc. to BS 88						
			SAKS 3 ²⁾	33 kA Breaking capacity 33 kA fast	440	E 0.5 A	GZ 0.5A/F	0533800000	10
SAKS 6 	E 1 A	GZ 1.0A/F	0525500000			10			
	E 2 A	GZ 2.0A	0294500000			10			
	E 3 A	GZ 3.0A	0295700000			10			
	E 5 A	GZ 5.0A	0294600000			10			
	E 7 A	GZ 7.0A	0295800000			10			
	E 10 A	GZ 10.0A	0293900000			10			
D fuse inserts E 16 with indicator acc. to DIN 49360 (diazed)									
SAKS 2 	E 10 A E 16 A E 20 A E 25 A	500	10	E 16/10A RT	0208500000	25			
			16	E 16/16A GR	0208600000	25			
			20	E 16/20A BL	0208700000	25			
			25	E 16/25A GE	0208800000	25			
D fuse inserts E 14 Size D 01 and E 18 size D 02 with indicator acc. to DIN 49522 (neozed)³⁾									
SAKS 4 ⁴⁾ 	E 14/2 E 14/4 E 14/6 E 14/10 E 14/16 E 18/20	400	2	E 14/2A RS	0137400000	10			
			4	E 14/4A BR	0137500000	10			
			6	E 14/6A GN	0328300000	10			
			10	E 14/10A RT	0328400000	10			
			16	E 14/16A GR	0328500000	10			
			20	E 18/20A BL	0361300000	10			
SAKS 5 	E 18/25 E 18/35 E 18/50 E 18/63	400	25	E 18/25A GE	0361400000	10			
			35	E 18/35A SW	0361500000	10			
			50	E 18/50A WS	0361600000	10			
			63	E 18/63A KU	0361700000	10			

(F) = fast
(M) = medium-delayed action

- Note:**
- 1) The SIBA company also supplies 5 x 25 G fuse inserts with indicators in a shipbuilding model for 450 V AC.
 - 2) 5 x 30 (500 V AC) fuse inserts for SAKS 3 are available from the WICKMANN company
 - 3) The LINDNER company also supplies neozed fuse cartridges in an additional shipbuilding mode for 440 V AC.
 - 4) Fuse cartridges with the dimensions 1"x1/4" ≅ 25.4x6.35 mm and 13/32"x1 1/8" ≅ 10.3x38.1 mm are not included in product line.
 - 5) Only for SAKS 1 and SAKS 7.

Gauge rings


For terminal type	Gauge ring type	Amp.	Colour	Type	Cat. No.	Qty.
SAKS 4 and 4/35 	P 14/2	2	Pink	P 14/2D01 RS	0138000000	50
	P 14/4	4	Brown	P 14/4D01 BR	0138100000	50
	P 14/6	6	Green	P 14/6D01 GN	0328600000	50
	P 14/1	10	Red	P 14/10D01 RT	0328700000	50
	SAKS 5 and 5/35 	P 18/20	20	Blue	P 18/20D02 BL	0361800000
P 18/25		25	Yellow	P 18/25D02 GE	0361900000	50
P 18/35		35	Black	P 18/35D02 SW	0362000000	50
P 18/50		50	White	P 18/50D02 WS	0362100000	50
SAKS 2 and 2/35 	P 16/10	10	Red	P 16/10 RT	0208900000	100
	P 16/16	16	Grey	P 16/16 GR	0209000000	100
	P 16/20	20	Blue	P 16/20 BL	0209100000	100

Disconnect test terminals


SAKR SAKR/35




SAKR-D SAKR-D/35



DKT 4 DKT 4/35



DKT 4 V DKT 4 V/35



Dimensions/approvals		SAKR SAKR/35	SAKR-D SAKR-D/35	DKT 4 DKT 4/35	DKT 4 V DKT 4 V/35
Width/length/height (mm)	with TS 32	6.5/42/40.5/54.5 (opened)	6.5/42/40.5/57 (with DLS 2)	6/65/56.5/70 (opened)	6/65/56.5/70 (opened)
Width/length/height (mm)	with TS 35 x 7.5	6.5/46/38/52	6.5/46/38/54.5	6/65/56.5/70	6/65/56.5/70
Insulation stripping length/clamping screw/screwdriver blade		8 mm/M 3/3.5 x 0.6	8 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Rated data					
Rated voltage/current/cross-section		400 V ⁵⁾ /10 A/4 mm ²	400 V/10 A/4 mm ²	400V/10 A/4 mm ²	400 V/10 A/4 mm ²
Rated impulse voltage/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data					
Tightening torque range	Nm	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB	0.5...1.0/0.5 StB
Torque setting with electric screwdriver type DMS 2		2/1	2/1	2/1	2/1
Clampable conductor					
Solid H07V-U	mm ²	0.5...4	0.5...4	0.5...4	0.5...4
Stranded H07V-R	mm ²	1.5...4	1.5...4	1.5...4	1.5...4
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...4	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²				
With/without plastic insulating collar	mm ²	0.5...4	0.5...4	0.5...4	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3	A 3	A 3	A 3
Continuous current rating of cross-connection 2...5-pole	A	(QB 2...25) 10	(QB 2...25) 10	(QB 2...4) 10	(QB 2...4) 10
Continuous current rating of cross-connection 6...10-pole	A				
Rated data according to UL/CSA					
Voltage/current/conductor size	UL	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG
Ordering data		Type Qty. Type Qty.	Type Qty. Type Qty.	Type Qty. Type Qty.	Type Qty. Type Qty.
	KrG	0412120000 100			
	PA	0412160000 100 0172160000 100	0412960000 ¹⁾ 100 0299960000 ²⁾ 50	0687360000 50 0687460000 50	
	Without diode PA		0413060000 ³⁾ 50 0185760000 ⁴⁾ 50		
	With diode PA		0263660000 ³⁾ 50 0299560000 ⁴⁾ 50		
	Blue PA	0412180000 100 0172180000 100			
	Orange PA	1461960000 100			
	KrG	0412220000 100			
	PA	0412260000 100 0183360000 100	0546460000 ¹⁾ 100	0327860000 50 0327960000 50	1304860000 50 1304960000 50
	without diode PA		0413160000 ²⁾ 50		
	Blue	0412280000 100 0183380000 100			
End plate (thickness mm)		Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
	KrG	AP (1.5) 0211320000 20	AP (1.5) 0211360000 20	AP (1.5) 0687560000 20	AP (1.5) 0687560000 20
	PA	AP (1.5) 0211360000 20			
	Blue PA	AP (1.5) 0211380000 20			
Partition (thickness mm)					
		TW HP (1.0) 0297100000 20	TW HP (1.0) 0297100000 20	TW HP (2.0) 0607000000 20	TW HP (2.0) 0607000000 20
Cross-connection					
QB 4	2-pole	QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100	QB 2 ⁴⁾ 0482700000 100
	3-pole	QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50	QB 3 ⁴⁾ 0482800000 50
	4-pole	QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50	QB 4 ⁴⁾ 0482900000 50
	25-pole	QB 25 blank ⁴⁾ 0134000000 20	QB 25 blank ⁴⁾ 0134000000 20		
Contact sleeve (spare)					
Test plug		PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
Diode plug (spare)					
	without diode		DLS 2 0321060000 50		
	with diode 1N4007		DLS 2 + 0630160000 50		
	with diode 1N4007		DLS 2 - 0547760000 50		
	with jumper		DLS 2 0547660000 25		
Marking tags		Print			
	DEK Standard	DEK 6.5 see "Accessories"	DEK 6.5 see "Accessories"	DEK 6 see "Accessories"	DEK 6 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"					


1) without DLS
2) with DLS empty

3) with DLS 1N4007
4) When using QB the rated cross-current reduces to max. 2.5 mm²

5) With DKT 4 only on upper terminal level
6) As disconnect test terminal rated voltage 250 V

Disconnect test terminals

ASK 1 ASK 1/35



RU @

8/58/49

8/58/44

9 mm/M 3/3.5 x 0.6

500 V/19 A/4 mm²

6 kV/3

0.5...1.0

2

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...4) 10

300 V/15 A/12 max. AWG

300 V/6.3 A/26...12 AWG

Qty.

0456360000 100

0105260000 100

Type	Cat. No.	Qty.
------	----------	------

AP (1.5)	0380360000	20
----------	-------------------	----

TW HP (2.0)	0607000000	20
-------------	-------------------	----

QB 2 ⁴)	0461100000	100
---------------------	-------------------	-----

QB 3 ⁴)	0461200000	50
---------------------	-------------------	----

QB 4 ⁴)	0461300000	50
---------------------	-------------------	----

multipole interruptable with group marking carrier SchS 2; 2-pole (Cat. No. **1359500000**) 1000 mm (Cat. No. **0337400000**)


K sleeve	0553300000	100
----------	-------------------	-----

DEK 5 FW	see "Accessories"	
----------	-------------------	--

Feed-through terminals with tab connection

AST 1 AST1/35

6.3
2.8



UL @ DNV

Dimensions/approvals	
Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

6.5/58/53.5
6.5/58/46

AST 3 AST 3/35

6.3
2.8



UL @ DNV

6.5/40/47.5
6.5/44/40

AST 4 AST 4/35

6.3
2.8




UL @

6.5/40/47.5
6.5/44/40
9 mm/M 2.5/3.5 x 0.6

AST 5 AST 5/35

6.3
2.8



UL @ DNV

6.5/58/53.5
6.5/58/46
12 mm/M 3/3.5 x 0.6

Rated data	
Rated voltage/-current	500 V ¹⁾ /-
Rated cross-section for clamping yokes	-
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
Clampable conductor	
Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2...5-pole	A
Continuous current rating of cross-connection 6...10-pole	A

Rated data according to UL/CSA	
Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA
Ordering data	
	Version
	Slotted KrG
	Slotted blue KrG
	Slotted PA
	Unslotted KrG
	Unslotted blue KrG
	Unslotted PA

Type	Cat. No.	Qty.
AP (3.0)	0266420000	20
AP (1.5)	0266460000	20
PA	0474700000	20
HP	0607000000	20
HP	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0298120000	20
AP (1.5)	0460560000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20
TSch 1	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0298120000	20
AP (1.5)	0460560000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20
TSch 1	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0266420000	20
AP (1.5)	0266460000	20
TW (1.0)	0474700000	20
TW (2.0)	0607000000	20
TSch 1	0319160000	100

End plate/partition/small partition (thickness mm)		
AP	TW	TSCH 1
		KrG
		Blue KrG
		PA
		HP
		HP
		Only for PA
		TSch 1

Cross-connection	
Q4	2-pole
	3-pole
	4-pole
	10-pole
	25-pole

Plug adapter	
	2-pole
	3-pole
	4-pole
	5-pole
	8-pole

Test plug/socket	
	Plug-test socket without using QL for TS 32
	PS
	StB

Insulation sleeve	
	IH 2.8
	IH 6.3

Marking tags	
	Print
	DEK
	Standard

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ with insulation sleeve
²⁾ shock proof with ADP 4 cover profiles ADP4 (see section "Accessories")

Feed-through terminals with tab connection

SAK 4 S SAK 4 S/35

6.3
2.8



Dimensions/approvals	
Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data	
Rated voltage/-current	500 V ¹⁾ /16 A
Rated cross-section for clamping yokes	4 mm ²
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3

Further technical data	
Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor	
Solid H07V-U	mm ² 0.33...6
Stranded H07V-R	mm ² 1.5...4
Flexible H07V-K	mm ² 0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...4
Plug gauge according to 60 947-7-1	Size A 4
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A (QL 2...10) 36 A at 6 mm ²
Continuous current rating of cross-connection multipole	A (QL 2...10) 36 A at 6 mm ²

Rated data according to UL/CSA	
Voltage/current/conductor size	UL 300 V/13 A/26...12 AWG
Voltage/current/conductor size	CSA 300 V/13 A/26...12 AWG

Ordering data		Version	
		Slotted KrG	Qty.
		Slotted blue KrG	Qty.
		Slotted PA	Qty.
		Unslotted KrG	Qty.

End plate/partition/small partition (thickness mm)		
AP	TW	TSch 1
		KrG
		Blue KrG
		PA
		HP

Cross-connection	
QL	QB 4
	2-pole
	3-pole
	4-pole
	10-pole
	25-pole

BS M 3 x 4.5	BS M 3 x 24

Test plug/socket
PS

Insulation sleeve
IH 2.8
IH 6.3

Marking tags	Print
	DEK Standard
DEK 6.5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

SAK 4 SS SAK 4 SS/35

6.3
2.8



Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data	
Rated voltage/-current	500 V ¹⁾ /16 A
Rated cross-section for clamping yokes	4 mm ²
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3

Further technical data	
Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor	
Solid H07V-U	mm ² 0.33...6
Stranded H07V-R	mm ² 1.5...4
Flexible H07V-K	mm ² 0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...4
Plug gauge according to 60 947-7-1	Size A 4
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A (QL 2...10) 36 A at 6 mm ²
Continuous current rating of cross-connection multipole	A (QL 2...10) 36 A at 6 mm ²

Rated data according to UL/CSA	
Voltage/current/conductor size	UL 300 V/13 A/26...12 AWG
Voltage/current/conductor size	CSA 300 V/13 A/26...12 AWG

Ordering data		Version	
		Slotted KrG	Qty.
		Slotted blue KrG	Qty.
		Slotted PA	Qty.
		Unslotted KrG	Qty.

Type	Cat. No.	Qty.
AP (1.5)	0117920000	20
AP (1.5)	0117970000	20
AP (1.5)	0117960000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20

QL 2	0130600000	100
QL 3	0130700000	100
QL 4	0130800000	50
QL 10	0338200000	20
BS M 3x4.5	1593210000	100
BS M 3x4.5	1593210000	100

PS 2.3	0180400000	20
--------	------------	----

IH 2.8	0386060000	100
IH 6.3	0386260000	100

DEK 6.5	see "Accessories"
DEK 6.5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

SAKR F SAKR F/35

2.8



Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data	
Rated voltage/-current	250 V ¹⁾ /10 A
Rated cross-section for clamping yokes	4 mm ²
Rated cross-section tab	-/1.0 mm ²
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3

Further technical data	
Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	1

Clampable conductor	
Solid H07V-U	mm ² 0.5...4
Stranded H07V-R	mm ² 1.5...4
Flexible H07V-K	mm ² 0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...2.5
Plug gauge according to 60 947-7-1	Size A 3
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A (QB 2...25) 10
Continuous current rating of cross-connection multipole	A (QB 2...25) 10

Rated data according to UL/CSA	
Voltage/current/conductor size	UL 300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA 300 V/10 A/26...12 AWG

Ordering data		Version	
		Slotted KrG	Qty.
		Slotted blue KrG	Qty.
		Slotted PA	Qty.
		Unslotted KrG	Qty.

Type	Cat. No.	Qty.
AP (1.5)	0211360000	20
TW (1.0)	0297100000	20

QB 2*	0482700000	100
QB 3*	0482800000	50
QB 4*	0482900000	50
QB 25 blank*	0134000000	20

PS 2.3	0180400000	20
--------	------------	----

IH 2.8	0386060000	200
--------	------------	-----

DEK 6.5	see "Accessories"
DEK 6.5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ With insulation sleeve

¹⁾ The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used

Feed-through terminals with tab connection

DK 4 SS/35



UL CE LR

Dimensions/approvals
 Width/length/height (mm) with TS 32
 Width/length/height (mm) with TS 35 x 7.5
 Insulation stripping length/clamping screw/screwdriver blade

6/54/60.5

Rated data

Rated voltage/-current 400 V¹/2 x 16 A
 Rated cross-section for clamping yokes -
 Rated cross-section tab 6.3/2.8 mm 2.5/1.0 mm²
 Rated Voltage VDE 0110/1.89/pollution severity 8 kV/3

Further technical data

Tightening torque range Nm
 Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U mm²
 Stranded H07V-R mm²
 Flexible H07V-K mm²
 Flexible H07V-K and ferrule according to DIN 46 228/1 mm²
 With/without plastic insulation collar
 Plug gauge according to 60 947-7-1 Size
 Continuous current of terminal for conductor size
 Continuous current rating of cross-connection 2 pole A (QL 2...10) 20
 Continuous current rating of cross-connection multipole A

Rated data according to UL/CSA

Voltage/current/conductor size UL 300 V/10 A/22...12 AWG
 Voltage/current/conductor size CSA 300 V/10 A/22...12 AWG

Ordering data

Version PA

Cat. No. Qty. **0217160000** 100

DK 4 SS/35 only 2.8



UL CE LR

6/54/60.5

400 V¹/2x10
 -
 1.0 mm²
 4 kV/3

-
 -


-
 -
 -
 -
 -
 -

(QL 2...10) 20

300 V/10 A/22...12 AWG
 300 V/10 A/22...12 AWG

Cat. No. Qty. **0297060000** 100

DK 4 S DK 4 S/35



UL CE

6/54/59.5
 6/54/60.5
 9 mm/M 3/3.5 x 0.6

400 V¹/2 x 10
 4 mm²
 1.0 mm²
 6 kV/3

0.5...1.0
 2

0.5...4
 1.5...4
 0.5...4
 0.5...4
 A 3

(QL 2...10) 20

300 V/10 A/22...12 AWG
 300 V/10 A/22...12 AWG

Qty. Qty. **0631260000** 100 **0686660000** 100

DK 4 S only 2.8 DK 4 S/35 only 2.8



UL CE

6/54/59.5
 6/54/60.5
 9 mm/M 3/3.5 x 0.6

400 V¹/2 x 10
 4 mm²
 1.0 mm²
 6 kV/3

0.5...1.0
 2

0.5...4
 1.5...4
 0.5...4
 0.5...4
 A 3

(QL 2...10) 20

300 V/10 A/22...12 AWG
 300 V/10 A/22...12 AWG

Qty. Qty. **0631160000** 100 **0686560000** 100

End plate (thickness mm)



PA

Type Cat. No. Qty. AP (1.5) **0631360000** 20

Type Cat. No. Qty. AP (1.5) **0631360000** 20

Type Cat. No. Qty. AP (1.5) **0631360000** 20

Type Cat. No. Qty. AP (1.5) **0631360000** 20

Partition



for TS 32 HP

TW HP (2.0) **0607000000** 20

TW HP (2.0) **0607000000** 20

Small partition



TSch 6

TSch 6 **0190260000** 100

TSch 6 **0190260000** 100

TSch 6 **0190260000** 100

TSch 6 **0190260000** 100

Cross-connection



Q 3

2-pole Q 2 **0336400000** 50
 3-pole Q 3 **0336500000** 50
 4-pole Q 4 **0336600000** 50
 10-pole Q 10 **0368600000** 20

2-pole Q 2 **0336400000** 50
 3-pole Q 3 **0336500000** 50
 4-pole Q 4 **0336600000** 50
 10-pole Q 10 **0368600000** 20

2-pole Q 2 **0336400000** 50
 3-pole Q 3 **0336500000** 50
 4-pole Q 4 **0336600000** 50
 10-pole Q 10 **0368600000** 20

2-pole Q 2 **0336400000** 50
 3-pole Q 3 **0336500000** 50
 4-pole Q 4 **0336600000** 50
 10-pole Q 10 **0368600000** 20

Test plug/socket



StB

Plug test socket without using QL
 Plug test socket for use with QL


StB 8.5 **0215700000** 50

StB 8.5 **0215700000** 50

StB 8.5 **0215700000** 50

StB 8.5 **0215700000** 50

Insulation sleeve



PS


PS 2.3 **0180400000** 20
 IH 2.8 **0386060000** 100
 IH 6.3 **0386260000** 100

PS 2.3 **0180400000** 20
 IH 2.8 **0386060000** 100
 IH 6.3 **0386260000** 100

PS 2.3 **0180400000** 20
 IH 2.8 **0386060000** 100
 IH 6.3 **0386260000** 100

PS 2.3 **0180400000** 20
 IH 2.8 **0386060000** 100

Marking tags



DEK

Print

Standard

DEK 6 see "Accessories"

DEK 6 see "Accessories"

DEK 6 see "Accessories"

DEK 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

) With insulation sleeve

Feed-through terminals for wrap termination

DIN 41 611, Part 2 and
for spring-clip termination
DIN 41 611, Part 4

SAK 2.5 T

Pin 1 x 1



SAK 2.5 T

Pin 0.8 x 1.6



SAK 2.5 T

Pin 0.8 x 2.4



Dimensions/approvals		Ⓒ	Ⓒ	Ⓒ
Width/length/height (mm)	with TS 32	6/36.5/47.5/67	6/36.5/47.5/62	6/36.5/47.5/69
Insulation stripping length/clamping screw/screwdriver blade		12 mm/M 2.5/3.5 x 0.6	12 mm/M 2.5/3.5 x 0.6	12 mm/M 2.5/3.5 x 0.6
Rated data				
Rated voltage/current/cross-section		250 V/8 A/2.5 mm ²	250 V/10 A/2.5 mm ²	250 V/10 A/2.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3	4 kV/3	4 kV/3
Further technical data				
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7
Torque setting with electric screwdriver type DMS 2		1	1	1
Clampable conductor				
Solid H07V-U	mm ²	0.5...6	0.5...6	0.5...6
Stranded H07V-R	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Plug gauge according to IEC 60 947-1	Size	A 3	A 3	A 3
Continuous current of terminal for conductor size				
Continuous current rating of cross-connection 2-pole	A	(Q 2...10) 24	(Q 2...10) 24	(Q 2...10) 24
Continuous current rating of cross-connection multipole	A			
Rated data according to UL/CSA				
Voltage/current/conductor size	UL			
Voltage/current/conductor size	CSA	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Ordering data		Pin	Version	
	Right		KrG	0108520000 100
	Horizontal right		KrG	0485920000 100
	Vertical left		KrG	0478820000 100
	Vertical right		KrG	0371020000 100
	2x vertical		KrG	0485020000 100
Right		PA	0108560000)100	
End plate (thickness mm)		Type	Cat. No.	Qty.
	KrG	AP (1.5)	0279520000	20
	PA	AP (1.5)	0279560000	20
AP (1.5)	KrG	AP (1.5)	0279520000	20
	PA	AP (1.5)	0279560000	20
Partition (thickness mm)		Type	Cat. No.	Qty.
	KrG	TW (2.5)	0302820000	20
	PA	TW (1.5)	0302860000	20
	HP	TW (0.5)	0197100000	20
	HP	TW (2.0)	0607000000	20
TSch 1	KrG	TSch 1	0319160000	100
	PA	TSch 1	0319160000	100
	2-pole	Q 2	0337000000	50
	3-pole	Q 3	0337100000	50
	4-pole	Q 4	0337200000	50
	10-pole	Q 10	0368700000	20
	Q 2**	0337000000	50	
Q 3**	0337100000	50		
Q 4**	0337200000	50		
Q 10**	0368700000	20		
Test plug/socket		Plug-test socket without using QL		
	PS	StB	StB 8.5 (ø 2.3)	0280600000 50
	PS 2.3	StB	PS 2.3	0180400000 20
	DEK	Standard	DEK 6	see "Accessories"
	DEK	Standard	DEK 6	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

) Shock-proof with ADP4 cover profile (see section "Accessories")

** Not for Type 2 x vertical"

Feed-through terminals

Disconnect terminals for wrap connection acc. to DIN 41 611, Part 2 and for spring-clip connection acc. to DIN 41 611, Part 4

DK 4 T
Pin 1 x 1



DK 4 T
Pin 0.8 x 1.6



DK 4 T
Pin 0.8 x 2.4



SAKRT
Pin 1 x 1/0.8 x 2.4 and 0.8 x 1.6



Dimensions		DK 4 T	DK 4 T	DK 4 T	SAKRT
Width/length/height (mm) with TS 32		6/50/58.5/75.5	6/50/60.5/77.5	6/50/67.5/84.5	6/42/40.5/54.5
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6	8 mm/M 3/3.5 x 0.6
Rated data					
Rated voltage/current/cross-section		250 V/8 A/4 mm ²	250 V/10 A/4 mm ²	250 V/10 A/4 mm ²	250 V/6/8 A/4 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3	4 kV/3	4 kV/3	4 kV/3
Further technical data					
Tightening torque range Nm		0.5...1.0	0.5...1.0	0.5...1.0	0.5...1.0
Torque setting with electric screwdriver type DMS 2		1	1	1	2
Clampable conductor					
Solid H07V-U mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Stranded H07V-R mm ²		1.5...4	1.5...4	1.5...4	1.5...4
Flexible H07V-K mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1					
With/without plastic insulating collar mm ²		0.5...4	0.5...4	0.5...4	0.5...4
Plug gauge according to IEC 60 947-1 Size		A3	A3	A3	A3
Continuous current of terminal block for conductor size					
Continuous current rating of cross-connection 2-pole A		(Q 2...10) 32	(Q 2...10) 32	(Q 2...10) 32	(QB 2...10) 10
Continuous current rating of cross-connection multipole A					
Rated data according to UL/CSA					
Voltage/current/conductor size UL		-	-	-	-
Voltage/current/conductor size CSA		-	-	-	-
Ordering data		Pin Type	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
 Horizontal assembly Vertical assembly	Right PA	0536560000 50			
	Links PA				
	Horizontal right PA		0370460000 ¹⁾ 50		1 x 1 0587460000 100
	Vertical right PA		0370360000 ¹⁾	0527760000 ¹⁾ 50	0.8 x 2.4 0545060000 100
	Vertical right Blue PA				
	Vertical left PA				0.8 x 1.6 0469360000 100
DK 4 QT bridgeable on both levels	Right PA	1398460000 ¹⁾ 50			
End plate/partition (thickness mm)		Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
	PA	AP (1.5) 0359260000 20	AP (1.5) 0359260000 20	AP (1.5) 0359260000 20	AP (1.5) 0211360000 20
	Blue PA	AP (1.5) 0359280000 20	AP (1.5) 0359280000 20		
		TW (2.0) 0607000000 20	TW (2.0) 0607000000 20	TW (2.0) 0607000000 20	TW (2.0) 0607000000 20
Small partition		TSch 4	TSch 4	TSch 4	
	TSch 4	0363360000 100	0363360000 100	0363360000 100	
Cross-connection/covers		Q 2	Q 2	Q 2	
	Q 3	0336400000 50	0336400000 50	0336400000 50	
	Q 4	0336500000 50	0336500000 50	0336500000 50	
	Q 4	0336600000 50	0336600000 50	0336600000 50	
	Q 10	0368600000 20	0368600000 20	0368600000 20	
	QB 2*	0482700000 100	0482700000 100	0482700000 100	0482700000 100
	QB 3*	0482800000 50	0482800000 50	0482800000 50	0482800000 50
	QB 4*	0482900000 50	0482900000 50	0482900000 50	0482900000 50
	25-pole				QB 25 blank* 0134000000 20
Test plug/socket		StB	StB	StB	
	Plug-test socket without using QL	StB 8.5 (ø23) 0215700000 50	StB 8.5 (ø23) 0215700000 50	StB 8.5 (ø2.3) 0215700000 50	
	PS	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	
	FW/FS	dekafix 6 see "Accessories"	dekafix 6 see "Accessories"	dekafix 6 see "Accessories"	

Mounting rails, end brackets, further marking material see "Accessories"

* The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.
** Only to be used with PA-version

¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

Disconnect test terminals with solder connections


SAKR L

With 2 StB 6



SAKR LL

With 2 StB 6



SAKR LL

With 2 StB 6



Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data

Rated voltage/current/cross-section	250 V/10 A/4/1.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2		1

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1		
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3

Continuous current of terminal block for conductor size		
Continuous current rating of cross-connection 2 pole	A	(QB 2...25) 10
Continuous current rating of cross-connection multipole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Type	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0518160000	100
Blue PA		
KrG		
KrS		
PA	0572660000	100
Blue PA		

6.5/50/40.5/54.5 (opened)

8 mm/M 3/3.5 x 0.6

250 V/10 A/4/1.5 mm²

4 kV/3

0.5...1.0

1

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...25) 10

A

6.5/58/40.5/54.5 (opened)

250 V/10 A/1.5 mm²

4 kV/3

300 V/10 A/22...12 AWG

Qty.

6.5/58/40.5/54.5 (opened)

250 V/10 A/1.5 mm²

4 kV/3

Qty.

0294260000 100

End plate/partition (thickness mm)

Type	Cat. No.	Qty.
KrG		
Blue KrG		
PA	AP (1.5)	0211360000 20
Blue PA	AP (1.5)	0211380000 20
PA		
HP	TW (0.5)	0474700000 20
HP	TW (2.0)	0607000000 20



Type Cat. No. Qty.

KrG		
Blue KrG		
PA	AP (1.5)	0211360000 20
Blue PA	AP (1.5)	0211380000 20
PA		
HP	TW (0.5)	0474700000 20
HP	TW (2.0)	0607000000 20

Type Cat. No. Qty.

AP (1.5)	0211320000	20
AP (1.5)	0211360000	20
AP (1.5)	0211380000	20
TW (0.5)	0474700000	20
TW (2.0)	0607000000	20

Type Cat. No. Qty.

AP (1.5)	0211320000	20
AP (1.5)	0211360000	20
AP (1.5)	0211380000	20
TW (0.5)	0474700000	20
TW (2.0)	0607000000	20

Small partition



Cross-connection



QB 3	QB 4	QB 2**	0482700000 100
	2-pole	QB 3**	0482800000 50
	3-pole	QB 4**	0482900000 50
	4-pole		
	10-pole	QB 25 blank**	0134000000 20
	25-pole		


Test plug/socket



PS 2.3 **0180400000** 20

PS 2.3 **0180400000** 20

Marking tags



DEK Standard

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

DEK 6.5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* Soldering lug on left-hand side

** The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.

Disconnect test terminals with solder connections

TAL
2 solder connections

TAL
4 solder connections

SAKK 4 **SAKK 10**
Ceramic feed-through terminals for use in high temperature ranges up to max. 210°C



Dimensions/approvals

Width/length/height (mm) with TS 32 with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade

4/48/36/50 (opened)

4/54/36/50 (opened)

8/40/53

11.5/40/53

Rated data

Rated voltage/current/cross-section
Rated impulse voltage VDE 0110/1.89/pollution severity

63 V/10 A/1.5 mm²
1.5 kV/3

63 V/10 A/1.5 mm²
1.5 kV/3

IEC 60 947-7-1
800 V/32 A/4 mm²

IEC 60 947-7-1
800 V/57 A/10 mm²

Further technical data

Tightening torque range Nm
Torque setting with electric screwdriver type DMS 2

Nm

0.5...1

1.2...2

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²
Flexible H07V-K mm²
Flexible H07V-K and ferrule according to DIN 46 228/1 mm²
Plug gauge according to 60 947-7-1 Size

0.5...6 mm²

2.5...16 mm²

0.5...4 mm²

2.5...10 mm²

A 4

B 6

35 A/6 mm²

63 A/16 mm²

36

47

36

36

Rated data according to UL/CSA

Voltage/current/conductor size UL
Voltage/current/conductor size CSA

Ordering data

Type Cat. No. Qty.
KrG
Blue KrG
KrS
PA **0212060000** 100
Blue PA
KrG
KrS
PA
Blue PA
Ceramic

Type Cat. No. Qty.
0304960000 100

Type Cat. No. Qty.

Type Cat. No. Qty.

End plate/partition (thickness mm)

AP TW

KrG
Blue KrG
PA
Blue PA
PA

Type Cat. No. Qty.
AP (1.5) **0212260000** 20

Type Cat. No. Qty.
AP (1.5) **0212260000** 20

SAKK 4 **1598080000** 50

SAKK 10 **1598090000** 50

AP/SAKK 4/10 **9502630000** 10

AP/SAKK 4/10 **9502630000** 10

Small partition

Cross-connection

Q 3 QB 4

2-pole
3-pole
4-pole
10-pole
25-pole

Type Cat. No. Qty.

QL 2 **9509420000** 100

QL 3 **9509430000** 100

QL 4 **9509440000** 50

QL 10 **9509450000** 20

VH 13.5 **0248500000** 100

BS (M3 X 20) **0303000000** 100

Type Cat. No. Qty.

QL 2 **9509470000** 100

QL 3 **9509480000** 50

QL 4 **9509490000** 50

QL 10 **9509500000** 20

VH 12.5 **9509510000** 50

BS (M3 X 20) **0303000000** 100

Additional accessories

Marking tags

DEK Standard On demand

On demand

On demand

SST **0152700000**

MEW 1/32 **0445600000**

EK 2 **0323100000**

SST **0152700000**


MEW 1/32 **0445600000**

EK 2 **0323100000**

Mounting rails, end brackets, further marking material see "Accessories"



Feed-through terminals for initiators and actuators

DLI 2.5




6/65/49	6/65/49
7 mm/M 2.5/3.5 x 0.6	7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD PNP



6/65/49	6/65/49
7 mm/M 2.5/3.5 x 0.6	7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD NPN



6/65/49	6/65/49
7 mm/M 2.5/3.5 x 0.6	7 mm/M 2.5/3.5 x 0.6

DLD 2.5



6/82/49	6/82/49
7 mm/M 2.5/3.5 x 0.6	7 mm/M 2.5/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	250 V/20 A/2.5 mm ²
Rated impulse voltage/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.6
Torque setting with electric screwdriver type DMS 2		1

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...2.5
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1	mm ²	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A 3
Continuous current of terminal for conductor size		20 A/2.5 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(Q 2...10) 20
Continuous current rating of cross-connection 6...10-pole	A	(Q 2...10) 20

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG

Ordering data

	Standard	Cat. No.	Qty.
		1313360000	100
	with diode 1N4007		
	with LED red (5...30 V)	1578510000	100
	with LED green (5...30 V)	1578520000	100
	with LED and diode 1N4007		
	with LED and diode 1N4007		
	Block of 10 ¹⁾	(w/o) 1411360000	10
	Block of 10 ¹⁾	(with dekafix) 1579070000	10
	Fuse inserts		

End plate/Small partition

AP-DLI	AP-DLD	Part-AP	TSch 1	Type	Cat. No.	Qty.
				AP	1313260000	20
				TSch 1	0319160000	100

Test plug/plug socket

	StB 8.5	PS	StB 8.5 (ø23) 0215700000	50
			PS 2.3 0180400000	20

Cross-connection

Q 3	Q 2	Q 3	Q 4	Q 10	Q 20	Q 2	Q 3	Q 4	Q 10	Q 20	QL 2	VH 4.2	VQB1.5/50BL	VQB1.5/50RT	VQB1.5/50SW

VQB

	Snap fit, external cross-connection VQB 1.5.
	For cross-connections for more than 20 terminals, replace VH with VH 4.2 (134580) without internal thread

Group marking

WT 4		WT 4	1341060000	100
SF 10		SF 10	0332400000	1000
SG 10		SG 10	0332500000	1000

Cover

HP 4		ADP	0485400000	20
		HP 4	0485860000	20

Marking tags

	DEK	Standard	DEK 6	see "Accessories"
--	-----	----------	-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

1) DLI 2.5/35/10 = Block of 10 with built-in cross-connections * only in upper busbar


Feed-through terminals for initiators and motors

VLI 1.5




UL	6/79/64
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

VLI 1.5PE



UL	6/69/63
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

MAK 2.5



UL	6/88/64
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	250 V/17.5 A/1.5 mm ²	250 V/17.5 A/1.5 mm ²	500 V (L-L)/250 V (L-PE) 24 A/2.5 mm ²
Rated impulse voltage/pollution severity	4 kV/3	4 kV/3	6 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.6**	0.4...0.6	0.4...0.6
Torque setting with electric screwdriver type DMS 2		1	1	1

Clampable conductor

Solid H07V-U	mm ²	0.5...4.0	0.5...4.0	0.5...4.0
Stranded H07V-R	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K	mm ²	0.5...4	0.5...4	1.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A3	A3	A3
Continuous current of terminal for conductor size		24 A/2.5 mm ²	24 A/2.5 mm ²	24 A/4 mm ²
Continuous current rating of cross-connection, multipole	A	24	24	24

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG

Ordering data

Version	Cat. No.	Qty.	Version	Cat. No.	Qty.	Version	Cat. No.	Qty.
PA	1633250000	50	PA	1633310000	50	PA	1615270000	50
							1631650000	50

End plate/partition

Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
End plate	AP VLI1.5	1633260000	20	APVLI1.5/PE	1633320000	20	AP MAK2.5	1615280000	20
Partial end plate for VLI1.5 – MAK2.5 combination	TEAP2 MAK2.5	1633330000	20	TEAP VLI1.5	1633270000	20	TEAP2 MAK2.5	1633330000	20
Partial end plate for VLI1.5 – VLI1.5PE combination	TEAP VLI1.5	1633270000	20	TEAP1 MAK2.5	1633340000	20	TEAP1 MAK2.5	1633340000	20
Partial end plate for VLI1.5PE – MAK2.5 combination									

Cross-connection

VQB 50-pole, snap-fit, external cross-connection	VQB1.5/50BL* 1633280000	5	VQB1.5/50BL* 1633280000	5	VQB1.5/50BL* 1633280000	5
	VQB1.5/50RT* 1633290000	5	VQB1.5/50RT* 1633290000	5	VQB1.5/50RT* 1633290000	5
	VQB1.5/50SW* 1635120000	5	VQB1.5/50SW* 1635120000	5	VQB1.5/50SW* 1635120000	5
					QB 25 SW* 0520000000	20
					QB 25 RT* 0520060000	20
					QB 25 BL* 0520080000	20



QB 25-pole external cross-connection

Group marking

T 5	0348500000	100	T 5	0348500000	100	T 5	0348500000	100
SF 10	0332400000	1000	SF 10	0332400000	1000	SF 10	0332400000	1000
SG 10	0332500000	1000	SG 10	0332500000	1000	SG 10	0332500000	1000

Marking tags

DEK	Standard	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"
-----	----------	-------	-------------------	-------	-------------------	-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

* When using cross-connection bridges, the connected cross-section is reduced by one level
 ** 0.4...0.45 for lower connection level

Disconnect test terminal against induced high voltage

PPT/35



SAKH 6



Measures to minimize risks of electric voltage peaks in control systems of power plants and transforming stations:

- Insulation between installation and control cable by pulling disconnect plugs.
- Grounding of control cable is possible on an appropriate location of the workplace.
- Easy connection of electric isolation of counting, control and communication circuits.

Electricity Supply Industry Standard ESI 12-4 1973

The Electricity Supply Industry Standard ESI 12-4 1973 defines a detailed specification of control and protection equipment. The main functions of these installations are as follows:

- Insulation of the control cables located in front of ground or installation lines with increased potential, which is required to prevent unintentional contact of service staff with live parts.
- Separation of control cables from local control circuits.
- Application also includes test connections for auxiliary control circuits and / or local control circuits.
- Grounding of control cables and / or auxiliary control circuits.
- Bundled disconnection of all auxiliary control circuits from potential earth.
- A test voltage can be applied using the screening connection of the control cable, which is normally routed on the enclosure, with the help of an appropriate separation. This permits to check whether the screening line is correctly functioning. For this test, an insulated feed-through plate is required.

ESI 12-4:

"Terminating Equipment for Pilot Cables subject to Induced Transient Voltages exceeding 650 V rms".

Dimensions/approvals		PPT/35		SAKH 6		
Width/length/height (mm)	with TS 35 x 7.5	15/138/79				
Insulation stripping length/clamping screw/screwdriver blade		12 mm			12 mm	
Rated data according to IEC 60 947-7-1						
Rated voltage/current		15 kV ac (ESI 12-4)**/30 A		1 kV ac / 1.5 kV dc / 47 A		
Rated impulse voltage/pollution severity				>15 kV (from terminal to terminal)		
Clampable conductor						
Solid H07V-U	mm ²	0.5...10		0.5... 6		
Stranded H07V-R	mm ²	0.5...10*		0.5... 6		
Ordering data		Version	Cat. No.	Qty.	Cat. No.	Qty.
		EP	PPT/35 3835020000	10	SAKH 6 0126600000	50
End plate		EP	AP/PPT (3) 3835120000	10	AP 0131700000	20
Disconnect plug			TST/PPT 3835360000	10		
Displacement tool		PA	PH/PPT 3835260000	10		
			The disconnect plug may only be removed with the displacement tool.			
Test plug/socket			PS (4) 0299600000	20		
			StB 17 0147100000	50		
Insulated mounting rail		PVC 35 x 1.5 mm	TSK 35 0514300000	1		
Marking tags		Print				
	DEK	Standard	DEK 5 see "Accessories"		DEK 5 see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"						

SAK-series

* Also two push-on tabs are possible
** mounted on an insulated mounting rail

Rail mounting TS 15

AK 4 AK 4/10



38.5 A / 6 mm²

UL **CE**
60/32/34

9 mm/M 3/3.5 x 0.6

690 V/32 A/4 mm²
8 kV/3

0.5...1.0
2

0.5...6
1.5...4

0.5...4
0.5...4

0.5...4
0.2...6.0 / A 3

20
20

TS 15 Cat. No. Qty.

0489560000 100

(10pol./no.mk.) **0366560000** 10
(10pol./w.mk.) **0469560000** 10

Type Cat. No. Qty.

BB 3 (8.0) **0366660000** 50
combined AP + end brackets

TW/AP (1.5) **1331760000** 20

TSch 4 **0363360000** 100

Q 2 **0369000000** 50

Q 3 **0369100000** 50

Q 4 **0369200000** 50

Q 10 **0369300000** 20

AD 4 **0303400000** 50

BSKM 25x18 **0303300000** 100

StB 8.5 **0215700000** 50

PS 2.3 **0180400000** 20

DEK 6 see "Accessories"

AKE 2.5



UL **CE**

5/28/27

7 mm/M 2.5/3.0 x 0.5

IEC 60 947-7-2

-/-/2.5 mm²
4 kV/3

0.4...0.6
1

0.5...4
1.5...2.5

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

TS 15 Cat. No. Qty.

1303360000 100

(green/yellow)

Type Cat. No. Qty.

-/-/26...12 AWG
-/-/26...12 AWG

AKE 4



UL **CE**

7/32/34

9 mm/M 3/3.5 x 0.6

IEC 60 947-7-2

-/-/4 mm²
8 kV/3

0.5...1.0
2

0.5...6
1.5...4

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

TS 15 Cat. No. Qty.

0380260000 100

(green/yellow)

Type Cat. No. Qty.

-/-/22...12 AWG
-/-/26...12 AWG

AKE 4 MS



CE

7/27.5/30

9 mm/M 3/3.5 x 0.6

-/-/4 mm²

0.8...1.6
3

0.5...4
1.5...4

0.5...4
0.5...4

0.5...4
0.5...4.0 / A 3

TS 15 Cat. No. Qty.

0211200000 50

-/-/22...14 AWG

Type Cat. No. Qty.

ASK 1

Fuse terminal



UL **CE**

8/58/34

9 mm/M 3/3.5 x 0.6

500 V/6.3 A¹/4 mm²
6 kV/3

0.5...1.0
2

0.5...4
1.5...4

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

(QB 2...4) 10

300 V/10 A/22...12 AWG

300 V/6.3 A/26...12 AWG

TS 15 Cat. No. Qty.

0376860000 100

5 x 20 without indicator

Type Cat. No. Qty.

AP (1.5) **0380360000** 20

QB 2¹) insul. **0461100000** 50

QB 3¹) insul. **0461200000** 50

QB 4¹) insul. **0461300000** 50

3-pole ganging with tag bar
SchS 2, snapped onto three
disconnect levers
(Cat. No. **0337400000**)

K sleeve **0553300000** 100

DEK 6.5 see "Accessories"

SAKR

Isolating blade terminal with 2 sockets or with 2 clamping screws



6.5/42/45

8 mm/M 3/3.5 x 0.6

400 V²/10 A/4 mm²
6 kV/3

0.5...1.0
2

0.5...4
1.5...4

0.5...4
0.5...4

0.5...4
0.13...4.0 / A 3

(QB 2...4) 10

TS 15 Cat. No. Qty.

with 2 StB **0412860000** 100

w. clamp.screw **0412760000** 100

Type Cat. No. Qty.

AP (1.5) **0211360000** 20

QB 2¹) insul. **0482700000** 50

QB 3¹) insul. **0482800000** 50

QB 4¹) insul. **0482900000** 50

QB 25¹) blank **0134000000** 20

PS 2.3 **0180400000** 20

DEK 6.5 see "Accessories"

¹) The conductor cross-section is * With contact sleeve 19 A reduced to max. 2.5 mm² when QB is used.

²) As disconnect test terminal: rated voltage 250 V

Feed-through terminals for TS 15

Tab connection
Solder connection

AKZ 4 SS

AKZ 4 SS

AKZ 4 S

AKZ 4 SF



Dimensions/approvals	AKZ 4 SS	AKZ 4 SS	AKZ 4 S	AKZ 4 SF							
Width/length/height (mm)	6/28.5/30.5	6/28.5/30.5	6/27/30	6/27/30							
Insulation stripping length/clamping screw/screwdriver blade			9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6							
Rated data											
Rated voltage*/current/cross-section	400 V/8 A/2.5/1 mm ²	400 V/8 A/1 mm ²	400 V/8 A/4/1 mm ²	400 V/8 A/4/1 mm ²							
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	6 kV/3	6 kV/3	6 kV/3							
Further technical data											
Tightening torque range	Nm		0.5...1.0	0.5...1.0							
Torque setting with electric screwdriver type DMS 2			2	2							
Clampable conductor											
Solid H07V-U	mm ²		0.5...4	0.5...4							
Stranded H07V-R	mm ²		1.5...4	1.5...4							
Flexible H07V-K	mm ²	Tab connec. 6.3 and 2.8 mm	0.5...4	0.5...4							
Flexible H07V-K and ferrule DIN 46 228/1	mm ²		0.5...4	0.5...4							
Flexible H07V-K and ferrule with plastic insul. collar	mm ²		0.5...4	0.5...4							
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size			0.2...4/A 3	0.2...4/A 3							
Continuous current rating of cross-connection 2-pole	A	20	20	20							
Continuous current rating of cross-connection multipole	A	20	20	20							
Rated data according to UL/CSA											
Voltage/current/conductor size	UL	150 V/10 A/22...12 AWG	150 V/20 A/22...12 AWG								
Voltage/current/conductor size	CSA	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG							
Ordering data	Type	Type	Type	Type							
	TS 15	TS 15	TS 15	TS 15							
	Cat. No.	Cat. No.	Cat. No.	Cat. No.							
	Qty.	Qty.	Qty.	Qty.							
	KrG										
	PA	0324560000	0324460000	0158760000							
	Blue PA	100	100	100							
	PA										
End plate (thickness mm)	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
	PA	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	
	PA										
	Blue PA										
	HP										
	HP										
	BB										
Partition (thickness mm)	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.		
	PA	TW (0.5)	0348260000	50	TW (0.5)	0348260000	50	TW (0.5)	0348260000	50	
	HP										
	HP										
Small partition											
Cross-connection											
	Q 2	0369000000	50	Q 2	0369000000	50	Q 2	0336400000	50		
	Q 3	0369100000	50	Q 3	0369100000	50	Q 3	0336500000	50		
	Q 4	0369200000	50	Q 4	0369200000	50	Q 4	0336600000	50		
	Q 10	0369300000	20	Q 10	0369300000	20	Q 10	0368600000	20		
Switchable cross-connection link											
	VL 2	0446700000	50	VL 2	0446700000	50	VL 2	0446700000	50		
	VH 10	0446600000	50	VH 10	0446600000	50	VH 10	0446600000	50		
	BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100		
Test plug/socket											
	StB	Plug test socket ø 2.3	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
	PS		PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
Cover											
Insulation sleeves											
	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100		
	IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100		
Marking tags											
	DEK	Standard	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"											

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals for TS 15

AL 1




6.5/32/21
400 V/16 A/1 mm ² 6 kV/3
0.5...1
0.5...1
TS 15 Cat. No. Qty. 0137320000 100
Type Cat. No. Qty. AP (1.5) 0164100000 20 AP (1.5) 0164500000 100
EP (1.0) 0164100000 100 EP (1.0) 0164500000 100
TW (0.5) 0166800000 50
TSch 4 0363360000 100
Q 2 0368200000 50 Q 3 0368300000 50 Q 4 0368400000 50 Q 10 0368500000 20
VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50 BSK M 25x18 0303300000 100
DEK 6.5 see "Accessories"

AKZ 1.5 L



5/34.5/25
7 mm / M 2.5 / 3.0 x 0.5
250 V/16 A/1.5 mm ² 4 kV/3
0.4...0.7 1
0.5...2.5 1.5
0.5...1.5 0.5...1.5 0.5...1.5 0.2...2.5 / A 1
24 24
150 V/10 A/24...16 AWG
TS 15 Cat. No. Qty. 0340160000 100
Type Cat. No. Qty. AP (1.5) 0329660000 20
TW (0.5) 0166800000 50
TSch 4 0363360000 100
Q 2 0368200000 50 Q 3 0368300000 50 Q 4 0368400000 50 Q 10 0368500000 20
VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50 BSK M 25x18 0303300000 100
DEK 5 see "Accessories"

AKZ 4 L



6/35.5/30
9 mm / M 3 / 3.5 x 0.6
250 V/16 A/4/1.5 mm ² 4 kV/3
0.5...1.0 2
0.5...4 1.5...4 0.5...4 0.5...4 0.2...4.0 / A 3
20 20
300 V/20 A/22...12 AWG 300 V/10 A/24...12 AWG
TS 15 Cat. No. Qty. 0334820000 100 0334860000 100
Type Cat. No. Qty. AP (1.5) 0294420000 20 AP (1.5) 0294460000 20 AP (1.5) 0294480000 20
TW (0.5) 0348260000 50
TSch 4 0363360000 100
Q 2 0336400000 50 Q 3 0336500000 50 Q 4 0336600000 50 Q 10 0368600000 20
VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50 BSK M 25x18 0303300000 100
DEK 6 see "Accessories"

AKZ 4 LL



6/44/30
250 V/16 A/1.5 mm ² 4 kV/3
0.5...1.5 1.5
0.5...1.5
0.2...2.5 / -
20 20
300 V/20 A/22...12 AWG 300 V/10 A/24...12 AWG
TS 15 Cat. No. Qty. 0346460000 100
Type Cat. No. Qty. AP (1.5) 0294460000 20
TW (0.5) 0348260000 50
TSch 4 0363360000 100
Q 2 0336400000 50 Q 3 0336500000 50 Q 4 0336600000 50 Q 10 0368600000 20
VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50 BSK M 25x18 0303300000 100
DEK 6 see "Accessories"


Feed-through terminals for TS 15

Solder connection
Spring-clip connection
 acc. to DIN 41611 Part 4
Wrap connection
 acc. to DIN/IEC 352 Part 1

AKZ 1.5 T



AKZ 1.5 T



AKZ 1.5 T



AKZ 2.5 K



Dimensions/approvals	with TS 15	AKZ 1.5 T	AKZ 1.5 T	AKZ 1.5 T	AKZ 2.5 K		
Width/length/height (mm)		5/25/45	5/25/39.5	5/28/44	5/26/46.7		
Pin size		0.8 x 1.6	1 x 1	0.8 x 1.6	0.8 x 1.6		
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5		
Rated data							
Rated voltage/current/cross-section		125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/10 A/2.5 mm ²		
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3	2.5 kV/3	2.5 kV/3	2.5 kV/3		
Further technical data							
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7	0.4...0.6		
Torque setting with electric screwdriver type DMS 2		1	1	1	1		
Clampable conductor							
Solid H07V-U	mm ²	0.5...2.5	0.5...2.5	0.5...2.5	0.5...4		
Stranded H07V-R	mm ²	1.5	1.5	1.5	1.5...2.5		
Flexible H07V-K	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5		
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5		
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5		
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A1	0.13...2.5 / A1	0.13...2.5 / A1	0.13...4.0 / A3		
Continuous current rating of cross-connection 2-pole	A	24	24	24	24		
Continuous current rating of cross-connection multipole	A	24	24	24	24		
Rated data according to UL/CSA							
Voltage/current/conductor size	UL	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG		
Voltage/current/conductor size	CSA	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/26...10 AWG		
Ordering data	Pin versions	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0.6 x 0.6	AKZ 1.5 T	0442560000	100	AKZ 1.5 T	0483660000	100
	1.0 x 1.0	AKZ 1.5 T	0357960000	100	AKZ 1.5 T	0357860000	100
	0.8 x 1.6 horizont.	AKZ 1.5 W	0329460000	100			
	0.8 x 1.6 vertical						
	0.8 x 2.4 horizontal						
	0.8 x 2.4 vertical						
Mounting, horizontal	Mounting, vertical						
End plate (thickness mm)	PA	AP (1.5) 0340560000 50	AP (1.5) 0340560000 50	AP (1.5) 0340560000 50	AP (2.5) 0697260000 50		
Partition (thickness mm)	PA				TW (1.5) 0318560000 20		
Small partition							
Cross-connection							
	2-pole	Q 2 0368200000 50	Q 2 0368200000 50	Q 2 0368200000 50	Q 2 0368200000 50		
	3-pole	Q 3 0368300000 50	Q 3 0368300000 50	Q 3 0368300000 50	Q 3 0368300000 50		
	4-pole	Q 4 0368400000 50	Q 4 0368400000 50	Q 4 0368400000 50	Q 4 0368400000 50		
	10-pole	Q 10 0368500000 20	Q 10 0368500000 20	Q 10 0368500000 20	Q 10 0368500000 20		
Switchable cross-connection link							
	VL						
	BS						
	VH						
Test plug/socket							
	StB	Plug test socket ø 2.3	StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50		
	PS		PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20		
Marking tags	Print						
	DEK	Standard	DEK 5 see "Accessories"	DEK 5 see "Accessories"	DEK 5 see "Accessories"		
Mounting rails, end brackets, further marking material see "Accessories"							

Feed-through terminals for TS 15

AKZ 2.5 K



AKZ 2.5 K



AKZ 4 T



AKZ 4 T



AKZ 4 T



AKZ 4 ST




AKZ 2.5 K			AKZ 2.5 K			AKZ 4 T			AKZ 4 T			AKZ 4 T			AKZ 4 ST		
5/26/46.7			5/47.5/27			6/27/48.5			6/27/50.5			6/27/57.8			6/27/50.2		
0.8 x 1.6			0.8 x 1.6			1 x 1			0.8 x 1.6			0.8 x 2.4			0.8 x 1.6		
7 mm/M 2.5/3.0 x 0.5			7 mm/M 2.5/3.0 x 0.5			9 mm/M 3/3.5 x 0.6			9 mm/M 3/3.5 x 0.6			9 mm/M 3/3.5 x 0.6			-		
250 V/8 A/2.5 mm ²			250 V/8 A/2.5 mm ²			250 V/10 A/4 mm ²			250 V/10 A/4 mm ²			250 V/10 A/4 mm ²			250 V/10 A/2.5 mm ²		
4 kV/3			4 kV/3			4 kV/3			4 kV/3			4 kV/3			4 kV/3		
0.4...0.6			0.4...0.6			0.5...1.0			0.5...1.0			0.5...1.0					
1			1			2			2			2					
0.5...4			0.5...4			0.5...4			0.5...4			0.5...4					
1.5...2.5			1.5...2.5			1.5...4			1.5...4			1.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.5...2.5 / -		
24			24			20			20			20			20		
24			24			20			20			20			20		
300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG		
300 V/10 A/26...10 AWG			300 V/10 A/26...10 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
AKZ 2.5 K	0695460000	100	AKZ 2.5 K	0695960000	100	AKZ 4 T	0445860000	100	AKZ 4 T	0344160000	100				AKZ 4 ST	0439260000	100
AKZ 2.5 K	0695660000	100	AKZ 2.5 K	0696160000	100				AKZ 4 T	0344060000	100						
												AKZ 4 T	0366460000	100			
												AKZ 4 T	0461660000	100			
AP (2.5)	0697260000	50	AP (2.5)	0697260000	50	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20
TW (1.5)	0318560000	20	TW (1.5)	0318560000	20	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50
						TSch 4	0363360000	100	TSch 4	0363360000	100	TSch 4	0363360000	100			
Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0369000000	50
Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0369100000	50
Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0369200000	50
Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0369300000	20
						VL 2	0446700000	50	VL 2	0446700000	50	VL 2	0446700000	50			
						VH 10	0446600000	50	VH 10	0446600000	50	VH 10	0446600000	50			
						BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100			
StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"	

SAK-series

Feed-through terminals for TS 15

for temperature measuring circuits


AKZ 4/TC



Weidmüller's thermocouple terminals are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path. This high measuring precision is necessary for, e.g. test beds for aircraft engines, for complicated chemical processes, control systems, etc.

- Busbar material corresponds to thermal and compensating conductors
- Clear thermocouple marking
- 2-pole blocks per thermocouple
- Row width 14 mm, incl. end plate

Configuration of a temperature measuring circuit



- | | |
|--------------------------|-----------------------------------|
| 1 Thermocouple (sensor) | 4 Reference point |
| 2 Thermocouple terminals | 5 Supply conductors (to and from) |
| 3 Compensating conductor | 6 Measuring device |

The thermocouple terminals displayed in this measurement circuit are used to thermo-electrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device. Thermocouple terminals are required for the construction of temperature measuring circuits.

Dimensions		
Width/length/height (mm)	with TS 15	14/27/30
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6
Rated data		
Rated voltage/current/cross-section		-/~/4 mm ²
Further technical data		
Tightening torque range	Nm	0.5...1
Torque setting with electric screwdriver type DMS 2		2
Clampable conductor		
Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...2.5
Plug gauge acc. to IEC 60 947-1	Size	A 3
Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2-pole	A	
Continuous current rating of cross-connection multipole	A	
Ordering data		
Version		TS 15
for thermocouples	Type J	Cat. No.
Acc. to IEC 584	Type T	Fe - CuNi
(DIN 43710)	Type K	Cu - CuNi
	Type E	NiCr - Ni
		NiCr - CuNi
		Qty.
		1627010000 20
		on demand
		1677130000 20
		on demand

End plate			Cat. No.	Qty.
	AP (thickness 1.5 mm)	PA	0294460000	20
Partition			Cat. No.	Qty.
	TW (thickness 0.5 mm)	PA	0348260000	50

Thermocouple, type J	
Thermocouple acc. to IEC 584 (DIN 43 710)	Busbar
	Constantan (CuNi)
	Iron (Fe)

Marking tags		Print
	Material VO	DEK 5/6
		1789590000 500

Mounting rails, end brackets, further marking material see "Accessories"

Multipole terminal blocks




Screw connection

MK 2/12

MK 10/14

MK 3/12





MK 4/16



Dimensions/approvals	UL	UL	UL	UL
Width/length/height (mm)	86/15/15	88.5/13.5/12	110/15/16.1	103/17/16
Insulation stripping length/clamping screw/screwdriver blade	5 mm/M 2.5/3.5 x 0.6	6 mm/M 2.5/3.5 x 0.6	5 mm/M 2.5/3.5 x 0.6	5 mm/M 2.5/3.5 x 0.6
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section	125 V/24 A/2.5 mm ²	125 V/24 A/2.5 mm ²	400 V/24 A/2.5 mm ²	400 V/24 A/2.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	2.5 kV/3	2.5 kV/3	6 kV/3	6 kV/3
Further technical data				
Tightening torque range	Nm 0.4...0.45	0.4...0.45	0.4...0.45	0.4...0.45
Torque setting with electric screwdriver type DMS 2	1	1	1	1
Clampable conductor				
Solid H07V-U	mm ² 0.5...4	0.5...4	0.5...4	0.5...4
Stranded H07V-R	mm ² 1.5...2.5	1.5...2.5	1.5...2.5	1.5...2.5
Flexible H07V-K	mm ² 0.5...2.5	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule DIN 46 228/1	mm ² 0.5...1.5	0.5...1.5	0.5...1.5	0.5...1.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ² 0.5...1.5	0.5...1.5	0.5...1.5	0.5...1.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size 0.2...4.0 / A 2	0.2...4.0 / A 2	0.2...4.0 / A 2	0.2...4.0 / A 2

Continuous current rating of cross-connection 2-pole A
 Continuous current rating of cross-connection multipole A

Rated data according to UL/CSA											
Voltage/current/conductor size		UL		UL		UL		UL			
300 V/10 A/24...12 AWG		300 V/10 A/24...12 AWG		150 V/25 A/22...12 AWG		300 V/25 A/22...12 AWG		150 V/20 A/22...12 AWG			
Voltage/current/conductor size		CSA		UL		UL		UL			
300 V/10 A/24...12 AWG		300 V/10 A/24...12 AWG		300 V/10 A/24...12 AWG		300 V/25 A/22...12 AWG		150 V/15 A/22...12 AWG			
Ordering data		Version	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
		2-pole				MK 3/2 KrG	0273820000	100			
		3-pole				MK 3/3 KrG	0273920000	50			
		4-pole				MK 3/4 KrG	0274020000	50			
		4-pole									
		6-pole				MK 3/6 KrG	0274220000	50			
		6-pole									
		8-pole				MK 3/8 KrG	0274420000	25			
		8-pole									
		10-pole				MK 3/10 KrG	0274620000	20			
		12-pole	MK 2/12 PA	0241260000	50	MK 3/12 KrG	0243520000	20			
		12-pole									
		14-pole				MK 10/14 PA	0370160000	20			
		16-pole				other numbers on request			MK 4/16 KrG	0244220000	20



The MK 10/14 can be mounted with glue or with M 3 x 12* screws through the empty terminal point aperture

*DIN EN ISO 1207

Soldering strip/expansion rivet									
MF 2/12		0241760000		50					
SN		0200100000		500					

Marking strips									
printed	1 ...	BSTb 28/12	0245700000	50		BSTb 28/16	0262200000	50	
		bottom				bottom			
		BSTb 28/12	0278500000	50		BSTb 28/16	0278700000	50	
		top				top			
unprinted		BSTo 28/12	0245600000	50		BSTo 28/16	0262100000	50	
		BSTo 28/8	0284700000	50					
		BSTo 28/6	0289500000	50					

Printed on top on request

SAK-series

Multipole terminal blocks


Screw/tab connection

MK 5/2

KS 2...10

BK 2...12

MK 6/2...6/6



Dimensions/approvals

Width/length/height (mm)	40/18/15.5	see table below	see table below	see table below
--------------------------	------------	-----------------	-----------------	-----------------

Insulation stripping length/clamping screw/screwdriver blade

5 mm/M 2.5/3.5 x 0.6	8 mm/M 3/4.0 x 0.8	8 mm/M 3/4.0 x 0.8	9 mm/M 4/4.0 x 0.8
----------------------	--------------------	--------------------	--------------------

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/24 A/2.5 mm ²	500 V/24 A/2.5 mm ²	400 V/32 A/4 mm ²	690 V/41 A/6 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	6 kV/3	6 kV/3	8 kV/3

Further technical data

Tightening torque range	Nm 0.4...0.45	0.5...0.7	0.5...0.7	1.2...2.0
Torque setting with electric screwdriver type DMS 2	1	2	2	4

Clampable conductor

Solid H07V-U	mm ² 0.5...4	0.5...4	0.5...4	0.5...6
Stranded H07V-R	mm ² 1.5...2.5	1.5...2.5	1.5...4	1.5...6
Flexible H07V-K	mm ² 0.5...2.5	0.5...2.5	0.5...4	0.5...6
Flexible H07V-K and ferrule DIN 46 228/1	mm ² 0.5...1.5	0.5...1.5	0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar	mm ² 0.5...1.5	0.5...1.2	0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size 0.2...4.0 / A 2	0.2...4.0 / A 2	0.33...4.0 / A 3	0.33...6.0 / A 3

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/20 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/30 A/22...10 AWG
Voltage/current/conductor size	CSA	300 V/25 A/24...12 AWG	300 V/10 A/22...12 AWG	300 V/40 A/22...10 AWG

Ordering data

Versions


Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
2-pole	MK 5/2 KrG	0243820000	100	KS 2 KrG ²⁾	0134420000	100	BK 2 KrG	0624720000	50	MK 6/2 KrG	0620420000	50
3-pole				KS 4 KrG ²⁾	0140320000	50	BK 3 KrG	0624920000	50	MK 6/3 KrG	0620320000	50
4-pole							BK 4 KrG	0625120000	50	MK 6/4 KrG	0620220000	20
4-pole												
6-pole				KS 6 KrG ²⁾	0140620000	50	BK 6 KrG	0625220000	50	MK 6/6 KrG	0620120000	20
6-pole												
8-pole												
8-pole												
10-pole				KS 10 KrG ²⁾	0141620000	20						
12-pole	Cover			Cover			BK 12 KrG	0625320000	50			
12-pole	D2 (for MK 5/2)	0244060000	50	D2 (for KS 2)	0134500000	100						
				D4 (for KS 4)	0140500000	50						
				D6 (for KS 6)	0140800000	50						
				D10 (for KS 10)	0141800000	20						



Cover D 2
(for MK 5/2)




Cover D 4
(for KS 4)



Cover




Marking tag cover



Dimensions

Type	a	b
BK 2	20	-
BK 3	31	11
BK 4	38	18
BK 6	52	32
BK 12	92	72.5



Dimens. Length/attach. dim.

Type	KRG
MK 6/2	23.5
MK 6/3	36.5
MK 6/4	49.5
MK 6/6	75.5

Expansion rivet

Marking strips

printed
1 ...

unprinted

ELSb 2	0143200000	50	BSTb 2B/2	0203600000	50	BSTb 17/6	0304600000	50
ELSb 4	0143300000	50	BSTb 2B/3	0203800000	50			
ELSb 6	0143400000	50	BSTb 2B/4	0197300000	50			
ELSb 10	0143500000	50	BSTb 2B/6	0197500000	50			
			BSTb 2B/12	0198800000	50			
ELSo 2	0142800000	50	BSTo 2B/2	0203500000	50			
ELSo 4	0142900000	50	BSTo 2B/3	0203700000	50			
ELSo 6	0143000000	50	BSTo 2B/4	0197200000	50			
ELSo 10	0143100000	50	BSTo 2B/6	0197400000	50			
			BSTo 2B/12	0198700000	50			


Mounting rails, end brackets, further marking material see "Accessories"

1) Projecting length = 1 mm. To be considered for the last terminal in a row!
Printed on top on request

2) Please order cover and marking strips separately.

Multipole terminal blocks

MF 1/6...1/12




UL CE

see below

SLS 2/2



SLS 2/4



UL CE

see below

Max. technical data

Dimensions/approvals

Width/length/height (mm)

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage²⁾/current/cross-section

Rated impulse voltage VDE 0110/1.89/pollution severity

Further technical data

Tightening torque range

Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U

mm²

Stranded H07V-R

mm²

Flexible H07V-K

mm²

Flexible H07V-K and ferrule DIN 46 228/1

mm²

Flexible H07V-K and ferrule with plastic insul. collar

mm²

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size

Rated data according to UL/CSA

Voltage/current/conductor size

UL

Voltage/current/conductor size

CSA

Ordering data

PA

300 V/10 A/24...12 AWG

300 V/10 A/22...10 AWG

Type Cat. No. Qty.

MF 1/6 KrG²⁾ **0479720000** 100

MF 1/6 KrG³⁾ **0480020000** 100

MF 1/8 KrG²⁾ **0479820000** 50

MF 1/8 KrG³⁾ **0480120000** 50

MF 1/12 KrG²⁾ **0479920000** 50

MF 1/12 KrG³⁾ **0480220000** 50

8 mm/M 3.5/4.0 x 0.8

400 V²⁾/16 A/4 mm²

6 kV/3

0.8...1.6

3

0.5...4

1.5...4

0.5...4

0.5...4

0.33...4.0 / A 3

300 V/10 A/22...10 AWG


Type Cat. No. Qty.

SLS 2/2 KrG **0213420000** 100

SLS 2/4 KrG **0240420000** 50



SLS 2/4 KrG **0480320000** 50

Slotted



Dimensions

Type	a	b	c	d
MF 1/6	52	34	9.5	6.5
MF 1/8	68	50	9.5	6.5
MF 1/12	113 ^{+0.5}	102	8	7.5



Expansion rivet/insulation sleeve

IH

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

SN **0200100000** 500

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

Cover/marking strips

BSTb 10/6 **0240900000** 50

BSTb 10/8 **0241100000** 50

BSTb 10/12 **0209500000** 50

BSTo 10/6 **0240800000** 50

BSTo 10/8 **0241000000** 50

BSTo 10/12 **0209400000** 100

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Insulation sleeves are to be used for tab connections to maintain the rated voltage.

²⁾ Single tab
³⁾ Double tab

Multipole terminal blocks





Screw, solder, tab connection

MKL 2/12

MF 2/12

MKL 3/12

MKL 4/16



Dimensions/approvals		MKL 2/12			MF 2/12			MKL 3/12			MKL 4/16				
Width/length/height (mm)		88/23/15			75/24/6			110/23/16			103/24/16.5				
Insulation stripping length/clamping screw/screwdriver blade		5 mm/M 2.5/3.5 x 0.6			5 mm			5mm/M 2.5/3.5 x 0.6			5mm/M 2.5/3.5 x 0.6				
Rated data															
Rated voltage*/current/cross-section		125 V/20 A/2.5/1.5/1 mm ²			63 V/17.5 A/1.5/1 mm ²			400 V*/20 A/2.5/1.5/1 mm ²			400 V/20 A/2.5/1.5/1 mm ²				
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3			1.5 kV/3			6 kV/3			6 kV/3				
Further technical data															
Tightening torque range		Nm 0.4...0.45						0.4...0.45			0.4...0.45				
Torque setting with electric screwdriver type DMS 2		1						1			1				
Clampable conductor															
Solid H07V-U		mm ² 0.5...2.5						0.5...4			0.5...4				
Stranded H07V-R		mm ² 1.5...2.5						1.5...2.5			1.5...2.5				
Flexible H07V-K		mm ² 0.5...2.5						0.5...2.5			0.5...2.5				
Flexible H07V-K and ferrule DIN 46 228/1		mm ² 0.5...2.5						0.5...1.5			0.5...1.5				
Flexible H07V-K and ferrule with plastic insul. collar		mm ² 0.5...2.5						0.5...1.5			0.5...1.5				
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.2...2.5 / A 2						0.33...4.0 / A 2			0.33...4.0 / A 2				
Rated data according to UL/CSA															
Voltage/current/conductor size		UL						300 V/25 A/22...12 AWG			300 V/25 A/22...12 AWG				
Voltage/current/conductor size		CSA						300 V/25 A/22...12 AWG			150 V/15 A/22...12 AWG				
Ordering data		Versions		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Horizontal		2-pole								MKL 3/2 KrG 0274920000** 100					
Other number of poles on demand		4-pole								MKL 3/4 KrG 0275120000** 100					
		6-pole								MKL 3/6 KrG 0275320000** 50					
		12-pole		MKL 2/12 PA	0241360000	50				MKL 3/12 KrG 0243620000** 20					
		16-pole											MKL 4/16 KrG 0262020000) 20		
Vertical		2-pole								MKL 3/2 KrG 0276020000* 100					
Other number of poles on demand		4-pole													
		6-pole								MKL 3/6 KrG 0276420000* 50					
		12-pole								MKL 3/12 KrG 0249920000* 20					
		16-pole											MKL 4/16 KrG 0244320000 20		
		double-sided 2.8 x 0.8					MF 2/12 PA	0241860000	50						
		single-sided 0.8 x 1.6/2.8 x 0.8					MF 2/12 PA	0241760000	50						
Expansion rivet/insulation sleeve		SN 0200100000 500			IH 2.8 0386060000 100										
Marking strips		printed			BSTb 28/12 0245700000 50			BSTb 28/4 0289800000 50			BSTb 28/16 0262200000 50				
		1 ... bottom			top 0278500000 50			BSTb 28/6 0290000000 50			bottom				
		unprinted			BSTo 28/12 0245600000 50			BSTo 28/12 0245900000 50			top				
								BSTo 28/4 0289300000 50			BSTo 28/16 0262100000 50				
								BSTo 28/6 0289500000 50							
								BSTo 28/12 0245800000 50							
Mounting rails, end brackets, further marking material see "Accessories"															


* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

) Rated voltage 250 V


Multipole terminal blocks

Screw, solder, tab
connection
Modular design

AKB 4



AKZ 2.5



ASK 1



Max. technical data

Dimensions/approvals	AKB 4	AKZ 2.5	ASK 1
Width/length/height (mm)	6/27/23	5/25.5/26.5	8/58/30.5
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6	7 mm/M 2.5/3 x 0.5	9 mm/M 3/3.5 x 0.6
Rated data according to IEC 60 947-7-1			
Rated voltage/current/cross-section	400 V/32 A/4 mm ²	250 V/24 A/2.5 mm ²	500 V/6.3 A/4 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	4 kV/3	6 kV/3
Further technical data			
Tightening torque range Nm	0.5...1.0	0.4...0.6	0.5...1.0
Torque setting with electric screwdriver type DMS 2	2	1	2
Clampable conductor			
Solid H07V-U mm ²	0.5...6	0.5...4	0.5...4
Stranded H07V-R mm ²	1.5...4	1.5...2.5	1.5...4
Flexible H07V-K mm ²	0.5...4	0.5...2.5	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²	0.5...4	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar mm ²	0.5...4	0.5...2.5	0.5...2.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size	0.33...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3
Continuous current rating of cross-connection 2-pole A	32	24	(QB 2...4) 10
Continuous current rating of cross-connection multipole A	32	24	
Rated data according to UL/CSA			
Voltage/current/conductor size UL	300/250 V/27 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size CSA	300 V/10 A/22...12 AWG	300 V/10 A/26...10 AWG	300 V/6.3 A/26...12 AWG
Ordering data			
	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
PA	AKB 4 PA 0321560000 100	AKZ 2.5 0697160000 100	ASK 1 PA 0376960000 100
Blue PA	0321580000 100	AKZ 2.5 0697180000 100	
	Direct mounting with BB 1 please order separately	Direct mounting with BB 4 please order separately	(for G fuse inserts 5x 20 without indicator)
End plate/attachment bracket (thickness mm)			
AP	BB 1 (7) 0320560000 50 BS M 3 x 15 0359000000 100	BB 4 (7.5) 0697560000 50	AP (1.5) 0380360000 20
Blue PA		AP (2.5) 0697360000 50 AP (2.5) 0697380000 50	
Partition (thickness mm)			
	TW PA (0.5) 0348260000 50		
Small partition			
	TSch 4 0363360000 100		
Cross-connection			
Q 3 QB 4	Q 2 0336400000 50 Q 3 0336500000 50 Q 4 0336600000 50 Q 10 0368600000 20	Q 2 0368200000 50 Q 3 0368300000 50 Q 4 0368400000 50 Q 10 0368500000 20	QB 2 ¹⁾ 0461100000 50 QB 3 ¹⁾ 0461200000 50 QB 4 ¹⁾ 0461300000 50
Switchable cross-connection link			
VL BS VH	VL 2 0446700000 50 VH 10 0446600000 50 BS M 2.5x14 0266800000 100		
Test plug/socket			
PS StB	StB 8.5 0215700000 50 PS 2.3 0180400000 20	StB 8.5 0215700000 50 PS 2.3 0180400000 20	
Cover/contact sleeve			
K sleeve	AD 4 0303400000 50 BSKM2.5x18 0303300000 100		K sleeve 0553300000 100
Marking tags			
DEK Standard	DEK 6 see "Accessories"	DEK 5 see "Accessories"	DEK 6.5 see "Accessories"

For fixing the screws of ASK 1 please use M 3 x ... DIN EN. ISO 1207 or M 3 x ... DIN EN, ISO 1580

* With contact sleeve 19 A

Feed-through terminals

Screw connection
Solder connection
Tab connection
Spring-clip connection
 acc. to DIN 41 611 Part 4
Wrap connection
 acc. to DIN/IEC 352 Part 1

AKA 2.5



ADK 1



ADK 1 F ADK 3 F



ADK 1 S



Dimensions/approvals		UL ®	UL ®	UL ®	UL ®								
Width/length/height with Pins (mm)		6/20/31	6/22/36.5	6/22/36.5	6/22/36.5								
Length solder tag/pin (mm)		7,8	8,4	8,5/7,5	8,4								
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 2.5/3.5 x 0.6	9 mm/M 3.5/3.5 x 0.6	11 mm/M 2.5/3.5 x 0.6	-								
Rated data													
Rated voltage*/current/cross-section		400 V/20 A/2.5/1.5 mm ²	400 V/16 A/4/1.5 mm ²	400 V/20 A/2.5/1.5 mm ²	400 V/16 A/2.5/1.5/1 mm ²								
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3								
Further technical data													
Tightening torque range	Nm	0.4	0.5...1.0	0.4...0.6	-								
Torque setting with electric screwdriver type DMS 2		1	2	1	-								
Clampable conductor													
Solid H07V-U	mm ²	0.5...2.5	0.5...4	0.5...2.5									
Stranded H07V-R	mm ²	1.5...2.5	1.5...4	1.5...2.5									
Flexible H07V-K	mm ²	0.5...2.5	0.5...4	0.5...2.5									
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...2.5	0.5...1.5									
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...2.5	0.5...1.5									
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A2	0.13...2.5 / A3	0.13...2.5 / A2	0.5...2.5 / -								
Continuous current rating of cross-connection 2-pole	A												
Continuous current rating of cross-connection multipole	A	10	10										
Rated data according to UL/CSA													
Voltage/current/conductor size	UL	300 V/20 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/20 A/26...14 AWG	300 V/18 A/12 AWG max.								
Voltage/current/conductor size	CSA	300 V/10 A/24...12 AWG	300 V/15 A/26...12 AWG	300 V/15 A/22...14 AWG	300 V/3 A/-								
Ordering data		Version	for plate thckn. mm	Cat. No.	1.5 Qty.	2.5 Qty.	1.5 Qty.	2.5 Qty.	1.5 Qty.	2.5 Qty.	2.5 Qty.		
		PA		0300720000	100								
		KrG											
		Pin 1.0x1.0											
		Pin 0.8x1.6											
		FS 1x6.3 slotted/0.8x2.8									0476160000 100		
		12-pole PA											
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
		KrG	AP (3)	0162520000	100								
		PA				AP (3)	0476260000	50	AP (3)	0476260000	50	AP (3)	0476260000
		EP							AP (3)	0360000000	20		
Spacer (thickness mm)													
		KrG	ZP (1.5)	0240720000	50								
		KrG	ZP (2.5)	0288520000	20								
Partition (thickness mm)													
						TW (0.5)	0442300000	50	TW (0.5)	0442300000	50	TW (0.5)	0442300000
Test plug/socket													
		StB	Plug test socket ø 2.3			PS 2.3	0180400000	20					
		PS											
Fuse pin/insulation sleeve/expansion rivet													
			SST 1.2	0306600000									
						SST 1.2	0306600000		SST 1.2	0306600000		SST 1.2	030660
						IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000
												IH 6.3	0386260000
Marking tags													
		Print											
		DEK	Standard	DEK 6	see "Accessories"	DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"													

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals

ADK 1 T



6/22/50.5
19.5...21.9
9 mm/M 3/3.5 x 0.6
400 V/8 A/4 mm ²
6 kV/3
0.5...1.0
2
0.5...4
1.5...4
0.5...4
0.5...2.5
0.5...2.5
0.13...4.0 / A3
10
300/250 V/10 A/26...12 AWG
300 V/15 A/26...12 AWG
1.5 Qty. 2.5 Qty.
0372260000 100
0366360000 100

Type	Cat. No.	Qty.
AP (3)	0476260000	50


TW (0.5)	0442300000	50
----------	-------------------	----

PS 2.3	0180400000	20
StB 8.5	0215700000	50

SST 1.2	0306600000	
---------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

AKZ 2.5 K



5/26/45.5
22.4...23.6
7 mm/M 2.5/3.0 x 0.5
250 V/8 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.13...2.5 / A2
10
300/250 V/10 A/22...12 AWG
300 V/10 A/26...10 AWG
Cat. No. Qty.
0109160000 solder tag 100
0108960000 100

Type	Cat. No.	Qty.
AP (3)	0697260000	50

TW (1.5)	0318560000	20
----------	-------------------	----

PS 2.3	0180400000	20
StB 8.5	0215700000	50

IH 2.8	0386060000	100
--------	-------------------	-----

DEK 5	see "Accessories"	
-------	-------------------	--

ADK 1 FT



6/22/52
24
11 mm/M 2.5/3.5 x 0.6
250 V/10 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...1.5
0.5...1.5
0.33...2.5 / A2
10
300 V/3 A/22...14 AWG
Cat. No. 1.5 Qty.
0176960000 100


Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5)	0442300000	50
----------	-------------------	----

SST 1.2	0306600000	
---------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

MK 2/12



86/15/23
8
5
63 V/20 A/2.5/1.5 mm ²
1.5 kV/3
0.4...0.45
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.2...2.5 / A2
10
300 V/10 A/24...12 AWG
300 V/10 A/24...12 AWG
Cat. No. Qty.
0241460000 50

Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5)	0442300000	50
----------	-------------------	----

SN	0200100000	500
----	-------------------	-----

BSTb 28/12	024570...	50
BSTo 28/12	024560...	50

Rack-mounted interface systems

TOP 1.5 F/32




SP 10 FF²⁾ SP 10 LF³⁾



SP 60 FF²⁾ SP 60 LF³⁾



SP 90 FF²⁾ SP 90 LF³⁾



Dimensions		TOP 1.5 F/32	SP 10 FF ²⁾ SP 10 LF ³⁾	SP 60 FF ²⁾ SP 60 LF ³⁾	SP 90 FF ²⁾ SP 90 LF ³⁾									
Width/length/height (mm)		40.2/110.6/29.5	42/46.5/170/28	40/45.5/162.5/110	40/45.5/228.5/110									
Hole spacing/mounting dimensions	mm	101.6/20.3	147	151/90	217/90									
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6												
Rated data														
Rated voltage [*] /current/cross-section		250 [*] V/6 A/1.5/1 mm ²	1000 [*] V/16 A/2.5/1.5 mm ²	400 [*] V/16 A/2.5/1.5 mm ²	400 [*] V/16 A/2.5/1.5 mm ²									
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3	6 kV/3	6 kV/3	6 kV/3									
Further technical data														
Tightening torque range	Nm	0.4...0.7												
Torque setting with electric screwdriver type DMS 2		1												
Clampable conductor														
Solid H07V-U	mm ²	0.5...2.5												
Stranded H07V-R	mm ²	1.5												
Flexible H07V-K	mm ²	0.5...1.5												
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5												
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5												
Plug gauge acc. to IEC 60 947-1	Size	A1												
Ordering data		Version	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Pin 1.0 x 1.0		PA	TOP 1.5 F/32	0443160000 ¹⁾	5									
Pin 0.8 x 2.8 (push-on), unprinted		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32, blue		PA												
6 x plug (6.3 x 0.8)		KrG				SP 10 FF	0456220000	10	SP 60 FF ⁴⁾	0340320000	1	SP 90 FF ^{**}	0248120000	1
6 x plug (6.3 x 0.8), blue		KrG							SP 60 FF ⁴⁾	0340370000	1			
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted		KrG										SP 90 FF ^{**}	0608920000	1
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted, blue		KrG												
3 x plug (6.3 x 0.8) / 1 x solder per pole		KrG							SP 60 LF ⁴⁾	0343720000	1	SP 90 LF ^{**}	0248220000	1
3 x plug (6.3 x 0.8) / 1 x solder per pole, blue		KrG							SP 60 LF ⁴⁾	0343770000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8) / 1 x solder		KrG							SP 60 LF ⁵⁾	0124520000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8) / 1 x solder, blue		KrG							SP 60 LF ⁵⁾	0124570000	1			
2 x direct connection, 1 x Pin 0.8 x 1.6		PA										printed:		
												** A...F / 1...15		
									printed:					
									⁴⁾ A...F / 1...10					
									⁵⁾ 00...50 / 1...10					
Insulation sleeves		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
		IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	
					IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100	
Marking tags		Print												
dekafix		for group markers			FW 5	see "Accessories"								
Mounting rails, end brackets, further marking material see "Accessories"														

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

¹⁾ Rated voltage 125 V

²⁾ FF = Tab-Tab
³⁾ LF = Solder-Tab

Rack-mounted interface systems

RV 8/8 long



RV 8/8 short



RV 8/9 long



RV 8/9 short



Technical data acc. to VDE

Pin versions (intern)

0.8 x 2.4/1 x 1

0.8 x 2.4/0.8 x 2.4

Plug adapter



1-pole

for connection of solid and flexible conductors from 0.75 to 1.5 mm² directly on to the pins of the interface system.


125 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0468860000	1		0467160000	1
	0468960000	1		0467260000	1
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

105 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0498960000	1		0444060000	1
	0499060000	1		0545960000	1
with shield pins			with shield pins		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

RV 8/20 short



RV 8/56 short

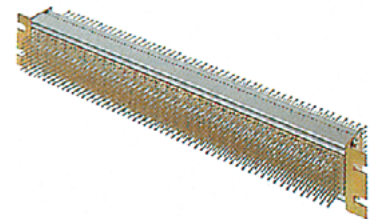

Technical data acc. to VDE

Pin versions (internal)


0.8 x 2.4/1 x 1

0.8 x 2.4/0.8 x 2.4

Additional versions on request

125 V/-/-		
Cat. No.	Qty.	
0544460000	1	

125 V/-/-		
Cat. No.	Qty.	
0462260000	1	
0533060000	4	

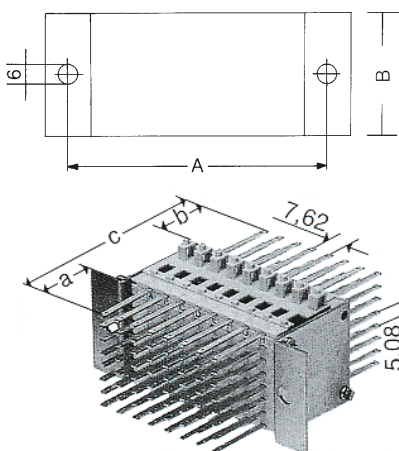

Type	Size A		Size B	
	in mm		in mm	
RV 8/8 K	81	40.64		
RV 8/9 K	89	40.64		
RV 8/8 L	93	40.64		
RV 8/9 L	100	40.64		
RV 8/20 K	187,62/31.5	63		
RV 8/56 K	460/31.5	63		

(K = short/L = long)

Cat. No.	RV	a	b	c
0468860000	8/8 L	26	20	200
0468960000	8/8 L	26	26	206
0467160000	8/8 K	26	20	84
0467260000	8/8 K	26	26	89
0119360000	8/20 K	26	20	84
0544460000	8/20 K	26	26	89
0462260000	8/56 K	26	20	84
0533060000	8/56 K	26	26	89

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series