


## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

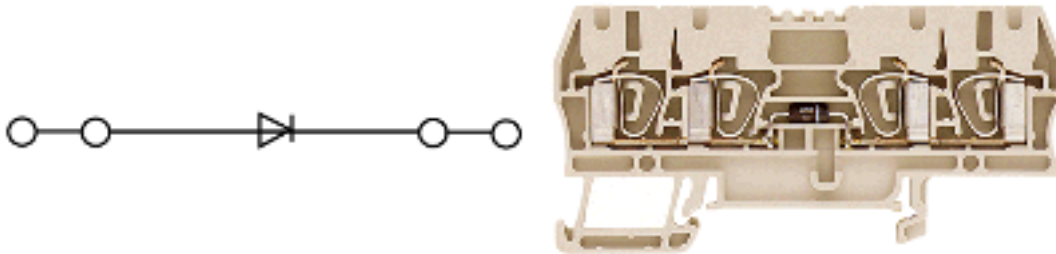

#### General ordering data

Order No.	1650340000
Part designation	ZDU 2.5/2X2AN/D+
Version	Component terminal, 2.5 mm <sup>2</sup> , Tension clamp connection, Wemid, beige, TS 35
EAN	4008190297398
Qty.	20 pc(s).

#### Product notes

Note, ordering data	Soldered diode: Type 1N 4007, reverse voltage 1000V, current 1 A
Product description	Z-series standard ranges provide solutions for conductor cross-sections from 0.05 to 35 mm <sup>2</sup> .

#### Additional technical data

Colour of insulating material	beige
Connection direction	top
Electronic component	Diode
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of levels	1
No. of terminal strips per level	4
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	Z-series
Type of connection	Plugged
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal with electronic components

#### Conductors for clamping (additional connection)

Type of connection	Tension clamp connection
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm <sup>2</sup>

#### Conductors for clamping (rated connection)

Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, max.	4 mm <sup>2</sup>
Type of connection	Tension clamp connection
Connection direction	top
No. of connections	4
Stripping length	10 mm
Blade size	0.6 x 3.5 mm
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	4 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	1.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	2.5 mm <sup>2</sup>
AWG conductor size, min.	0.05 mm <sup>2</sup>
AWG conductor size, max.	4 mm <sup>2</sup>

#### Dimensions

Width	5.1 mm
Height of lowest version	39.5 mm
Length	79.5 mm
TS 32 offset	41.5 mm
TS 35 offset	39 mm

#### Rating data

Rated cross-section	2.5 mm <sup>2</sup>
Rated voltage	400 V
Rated impulse voltage	6 kV
Rated current	1 A
Standards	IEC 60947-7-1
Pollution severity	3

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	27-14-11-27
------------	-------------

#### Classifications

eClass 5.0	27-14-11-27
eClass 5.1	27-14-11-27

#### Similar products

Order No.	Part designation	Version
1650350000	ZDU 2.5/2X2AN/D-	Component terminal, 2.5 mm <sup>2</sup> , Tension clamp connection, Wemid, beige, TS 35