


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

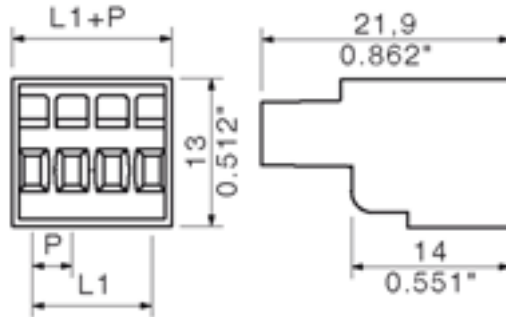

General ordering data

Order No.	1690190000
Part designation	BLZF 3.5/2 SN OR
Version	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
EAN	4008190328689
Qty.	100 pc(s).

System parameters

Conductor connection system	Tension clamp connection
Outgoing direction of conductor	180°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	2
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264-A
Stripping length	10 mm
L1 in mm	3.5 mm
L1 in inch	0.138 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

System parameters

Material data

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	Copper alloy
Contact surface	tinned

Connectable conductors

Clamping range, min.	0.13 mm ²
Clamping range, max.	1.5 mm ²
AWG, min.	28
AWG, max.	16
Outer diameter of insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²
With wire end ferrule, acc. to DIN 46 228/1, min.	0.2 mm ²
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, max.	1 mm ²
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm;

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	14.5 A
Rated current, max. No. pins (Tu=20°C)	10 A
Rated current, min. No. pins (Tu=40°C)	12 A
Rated current, max. No. pins (Tu=40°C)	8 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 100 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	26
AWG conductor (field wiring), max.	14

CSA rating data

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	26
AWG conductor, max.	14

Approvals

Approvals institutes



Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1690420000	BLZF 3.5/2 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
1690200000	BLZF 3.5/3 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
1690430000	BLZF 3.5/3 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
1690210000	BLZF 3.5/4 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1690440000	BLZF 3.5/4 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1690220000	BLZF 3.5/5 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1690450000	BLZF 3.5/5 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1690230000	BLZF 3.5/6 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 180°, Box

1690460000	BLZF 3.5/6 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 180°, Box
1690240000	BLZF 3.5/7 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1690470000	BLZF 3.5/7 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1690250000	BLZF 3.5/8 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1690480000	BLZF 3.5/8 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1690260000	BLZF 3.5/9 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1690490000	BLZF 3.5/9 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1690270000	BLZF 3.5/10 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1690500000	BLZF 3.5/10 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1690280000	BLZF 3.5/11 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1690510000	BLZF 3.5/11 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1690290000	BLZF 3.5/12 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1690520000	BLZF 3.5/12 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1690300000	BLZF 3.5/13 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1690530000	BLZF 3.5/13 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1690310000	BLZF 3.5/14 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 14, 180°, Box
1690540000	BLZF 3.5/14 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 14, 180°, Box

1690320000	BLZF 3.5/15 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1690550000	BLZF 3.5/15 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1690330000	BLZF 3.5/16 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1690560000	BLZF 3.5/16 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1690340000	BLZF 3.5/17 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1690570000	BLZF 3.5/17 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1690350000	BLZF 3.5/18 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1690580000	BLZF 3.5/18 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1690360000	BLZF 3.5/19 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1690590000	BLZF 3.5/19 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1690370000	BLZF 3.5/20 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1690600000	BLZF 3.5/20 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1690380000	BLZF 3.5/21 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1690610000	BLZF 3.5/21 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1690390000	BLZF 3.5/22 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1690620000	BLZF 3.5/22 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1690400000	BLZF 3.5/23 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 23, 180°, Box

1690630000	BLZF 3.5/23 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 23, 180°, Box
1690410000	BLZF 3.5/24 SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 24, 180°, Box
1690640000	BLZF 3.5/24 SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 24, 180°, Box