


## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

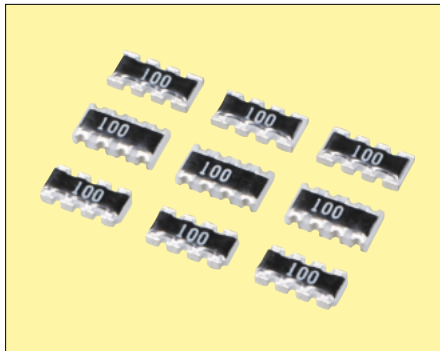

### Features

- Reduction in mounting process & costs
- Save PCB space.
- Reduction of inventory control costs.

### Applications

- Computer
- Printer
- Hard Disk Drive
- CD-ROM

### How to Order

CRA3A 4E 103 J T  
① ② ③ ④ ⑤

- ① Series
- ② Number of elements (4E : 4 elements)
- ③ Resistance value (3 digits),  
Chip Jumper Arrays : 000
- ④ Tolerance

|              |                    |
|--------------|--------------------|
| <b>J</b>     | ±5%                |
| <b>Blank</b> | Chip Jumper Arrays |

- ⑤ Packaging

|          |                             |
|----------|-----------------------------|
| <b>T</b> | Paper Taping, 5,000pcs/reel |
|----------|-----------------------------|

Chip Resistor Arrays have several resistor elements integrated as a single component.

- 4 Elements Array
  - CRA3A4E series Convex Scallop type
  - CRB3A4E series Concave type
  - CRC3A4E series Convex Corner type

### Rating

| Chip resistor arrays  |                  | Chip jumper arrays          |         |
|-----------------------|------------------|-----------------------------|---------|
| Item                  | Rating           | Item                        | Rating  |
| Rated power (70°C)*   | 1/16W element    | Rated current               | 1A      |
| Max working voltage   | 50V              |                             |         |
| Max Over-load voltage | 100V             |                             |         |
| Resistance value      | J : 10Ω to 2.2MΩ | Conductive resistance value | 50mΩmax |
| Tolerance             | J ±5%            |                             |         |
| Working Temperature   | -55 to +125°C    |                             |         |
| Number of elements    | 4E: 4 Elements   |                             |         |

\*Rated Voltage : 50V or  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less.

\*Standard Resistance Value: E-12 Series


\*For non standard value, optional please contact us.

### Dimensions

(Unit : mm)

|       |                 | 4 elements<br>CRA3A4E series | 4 elements<br>CRB3A4E series | 4 elements<br>CRC3A4E series |
|-------|-----------------|------------------------------|------------------------------|------------------------------|
| Shape |                 |                              |                              |                              |
|       | Dimensions (mm) |                              |                              |                              |
|       | W               | 1.60±0.15                    | 1.60±0.15                    | 1.60±0.15                    |
|       | L               | 3.20±0.15                    | 3.20±0.15                    | 3.20±0.15                    |
|       | c               | 0.30±0.20                    | 0.30±0.20                    | 0.30±0.20                    |
|       | d               | 0.20±0.15                    | 0.40±0.15                    | 0.20±0.15                    |
|       | T               | 0.50±0.10                    | 0.60±0.10                    | 0.50±0.10                    |
|       | p               | 0.8typ                       | 0.8typ                       | 0.8typ                       |

• Detailed specifications are available on request.

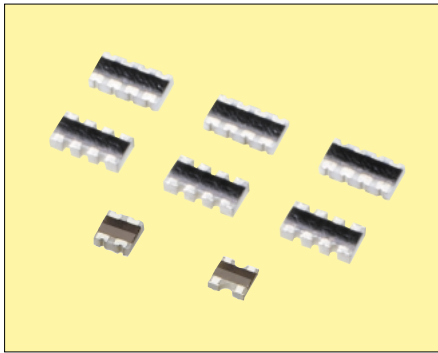

Miniature chip resistor arrays have 4 and 2 resistor elements integrated as a single component.

### Features

- Miniature (2.0×1.0mm) Resistor Arrays  
Max 60% space saving compared with the use of standard chip array (3.2×1.6mm)
- 0.5mm Termination pitch (Same as IC lead-pin pitch)  
Easy designing of pattern layout and improve electrical characteristics for circuit

- 4 element chip Resistors Array — CRB2A4E series ( Termination)  
CRC2A4E series ( Termination)
- 2 element chip Resistors Array — CRB11A2E series ( Termination)  
CRC11A2E series ( Termination)

### How to Order

CRB2A
4E
103
J
H

①
②
③
④
⑤

- ① Series (CRB2A: 2.0×1.0mm, termination)  
(CRC2A: 2.0×1.0mm, termination)  
(CRB11A: 1.0×1.0mm, termination)  
(CRC11A: 1.0×1.0mm, termination)
- ② Number of elements (4E: 4 elements)  
(2E: 2 elements)
- ③ Resistance Value (3 digits numbering)  
472 = 4.7kΩ, 103 = 10kΩ  
000 = 0Ω (Chip Jumper Array)
- ④ Tolerance


|          |     |              |                   |
|----------|-----|--------------|-------------------|
| <b>J</b> | ±5% | <b>Blank</b> | Chip Jumper Array |
|----------|-----|--------------|-------------------|

- ⑤ Packaging

| Code     | Form   | Material | Packing unit  |
|----------|--------|----------|---------------|
| <b>H</b> | Taping | Paper    | 10000pcs/reel |


• 2mm pitch taping

### Dimensions

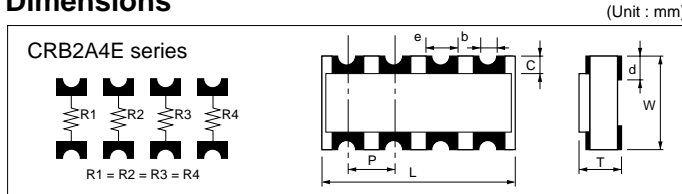


| Code              | L                                     | W                                      | T                                     | P      | b        |
|-------------------|---------------------------------------|--|---------------------------------------|--------|----------|
| <b>Dimensions</b> | 2.0 <sup>+0.10</sup> <sub>-0.10</sub> | 1.0 <sup>+0.10</sup> <sub>-0.10</sub>  | 0.4 <sup>+0.10</sup> <sub>-0.10</sub> | 0.5typ | φ0.15typ |
| <b>Code</b>       | <b>c</b>                              | <b>d</b>                               | <b>e</b>                              |        |          |
| <b>Dimensions</b> | 0.2 <sup>+0.15</sup> <sub>-0.15</sub> | 0.25 <sup>+0.15</sup> <sub>-0.15</sub> | 0.25typ                               |        |          |

• Non-marking on chips

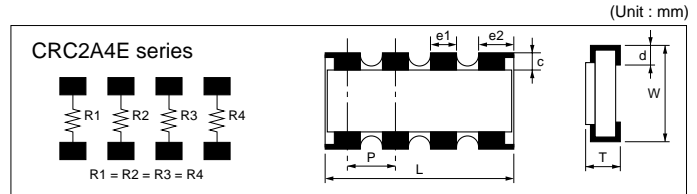


| Code              | L                                      | W                                      | T                                     | P                                     |
|-------------------|--|--|---------------------------------------|---------------------------------------|
| <b>Dimensions</b> | 2.0 <sup>+0.10</sup> <sub>-0.10</sub>  | 1.0 <sup>+0.10</sup> <sub>-0.10</sub>  | 0.4 <sup>+0.10</sup> <sub>-0.10</sub> | 0.5typ                                |
| <b>Code</b>       | <b>c</b>                               | <b>d</b>                               | <b>e1</b>                             | <b>e2</b>                             |
| <b>Dimensions</b> | 0.15 <sup>+0.15</sup> <sub>-0.15</sub> | 0.25 <sup>+0.15</sup> <sub>-0.15</sub> | 0.3 <sup>+0.10</sup> <sub>-0.10</sub> | 0.4 <sup>+0.10</sup> <sub>-0.10</sub> |

• Non-marking on chips

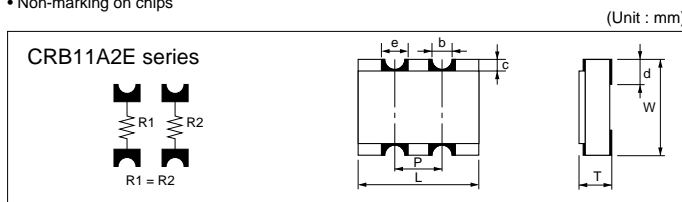

| Code              | L                                      | W                                      | T                                      | P       | b        |
|-------------------|--|--|--|---------|----------|
| <b>Dimensions</b> | 1.00 <sup>+0.10</sup> <sub>-0.10</sub> | 1.00 <sup>+0.10</sup> <sub>-0.10</sub> | 0.40 <sup>+0.10</sup> <sub>-0.10</sub> | 0.50typ | φ0.15typ |
| <b>Code</b>       | <b>c</b>                               | <b>d</b>                               | <b>e</b>                               |         |          |
| <b>Dimensions</b> | 0.20 <sup>+0.15</sup> <sub>-0.15</sub> | 0.25 <sup>+0.15</sup> <sub>-0.15</sub> | 0.25typ                                |         |          |

• Non-marking on chips

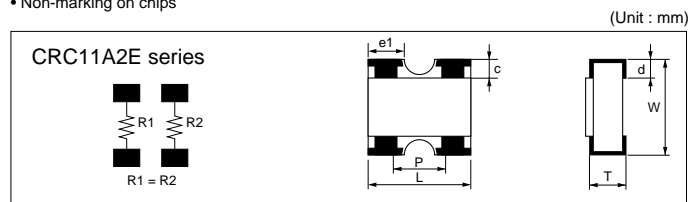

| Code              | L                                      | W                                      | T                                      | P       |
|-------------------|--|--|--|---------|
| <b>Dimensions</b> | 1.00 <sup>+0.10</sup> <sub>-0.10</sub> | 1.00 <sup>+0.10</sup> <sub>-0.10</sub> | 0.35 <sup>+0.05</sup> <sub>-0.05</sub> | 0.65typ |
| <b>Code</b>       | <b>c</b>                               | <b>d</b>                               | <b>e1</b>                              |         |
| <b>Dimensions</b> | 0.20 <sup>+0.15</sup> <sub>-0.15</sub> | 0.20 <sup>+0.15</sup> <sub>-0.15</sub> | 0.33 <sup>+0.10</sup> <sub>-0.10</sub> |         |

• Non-marking on chips


### Rating

| Chip resistor arrays  |                                | Chip jumper array           |         |
|-----------------------|--------------------------------|-----------------------------|---------|
| Item                  | Rating                         | Item                        | Rating  |
| Rated power(70°C)     | 1/32W/element                  | Rated current               | 1A      |
| Max working * voltage | 25V                            |                             |         |
| Max Over-load voltage | 50V                            |                             |         |
| Resistance value      | 10Ω to 1MΩ                     | Conductive resistance value | 50mΩmax |
| Tolerance             | J : ±5%                        |                             |         |
| Working Temperature   | -55 to +125°C                  |                             |         |
| Number of elements    | 4E : 4Elements, 2E : 2Elements |                             |         |

\* Rated Voltage :  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less.

\* Standard Resistance Value: E-6 Series

\* Please contact sales engineer for any other requirements of the nominal resistance value and the tolerance.

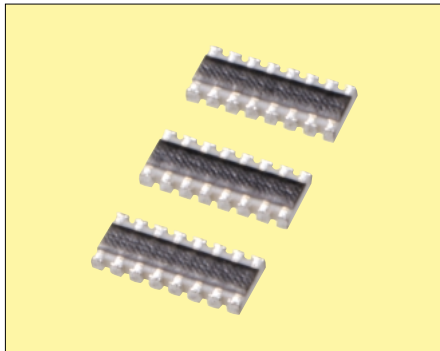

### Features

- 0.5mm termination pitch (same as IC lead-pin pitch).  
Easy designing of pattern layout and improve electrical characteristics for circuit. 3.8mm length of the chip makes the assembly of the next chip possible without changing the pattern pitch.

### How to Order

**CRC4A 8E 103 J T**  
 ① ② ③ ④ ⑤

- ① Series CRC4A
- ② Number of elements  
8E = 8 elements
- ③ Resistance value  
3 digits numbering
- ④ Tolerance

|          |     |
|----------|-----|
| <b>J</b> | ±5% |
|----------|-----|


- ⑤ Packaging

|          |                            |
|----------|----------------------------|
| <b>T</b> | Taping paper 5,000pcs/reel |
|----------|----------------------------|

• 8 element chip Resistor Array ———— CRC4A8E series ( □ Termination)

### Dimensions

(Unit : mm)

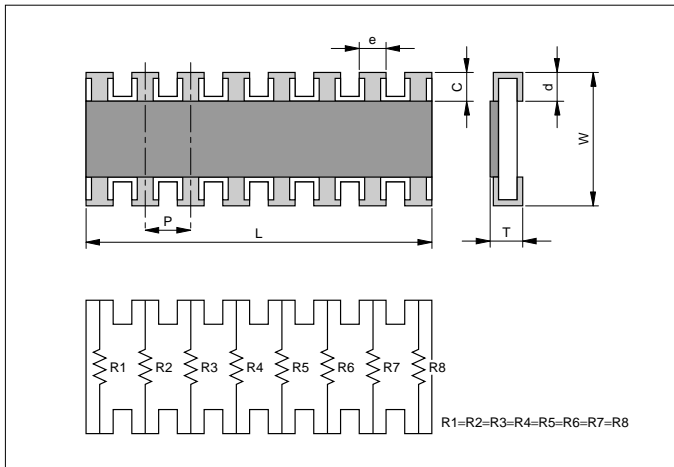


| Code       | L        | W       | T        | P      | c       |
|------------|----------|---------|----------|--------|---------|
| Dimensions | 3.8±0.1  | 1.6±0.1 | 0.45±0.1 | 0.5typ | 0.3±0.2 |
| Code       | d        | e       |          |        |         |
| Dimensions | 0.3±0.15 | 0.3±0.1 |          |        |         |

• No marking on chips.

### Rating

| Chip Resistor Arrays         |                               |
|------------------------------|-------------------------------|
| Item                         | Rating                        |
| <b>Rated power(70°C)</b>     | 1/16W/element<br>1/4W/package |
| <b>Max working voltage*</b>  | 25V                           |
| <b>Max over-load voltage</b> | 50V                           |
| <b>Resistance value</b>      | 10Ω to 1MΩ                    |
| <b>Tolerance</b>             | J:±5%                         |
| <b>Working temperature</b>   | -55 to +125°C                 |
| <b>Number of elements</b>    | 8E:8elements                  |

\* Rated Voltage :  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less.  
 \* Standard Resistance Value: E-6 Series  
 \* Please contact sales engineer for any other requirements of the nominal resistance value and the tolerance.

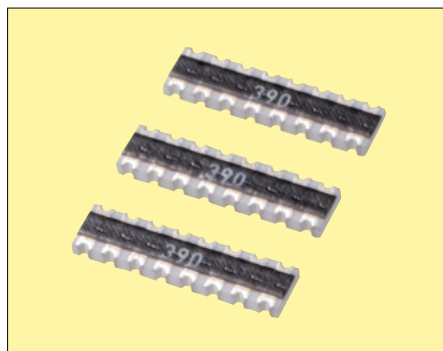

## Features

- Equal length conductors can be traced out from 0.8mm pitch termination.  
Also, good matching at low impedance.

## How to Order

CRB6A 8E 390 G U  
① ② ③ ④ ⑤

- ① Series CRB6A
- ② Number of elements  
8E = 8 elements
- ③ Resistance value  
3 digits numbering
- ④ Tolerance

|          |     |
|----------|-----|
| <b>G</b> | ±2% |
|----------|-----|


- ⑤ Packaging

|          |                              |
|----------|------------------------------|
| <b>U</b> | Taping plastic 4,000pcs/reel |
|----------|------------------------------|

• 8 element chip Resistor Array ——— CRB6A8E series ( □ Termination)

## Dimensions

(Unit : mm)

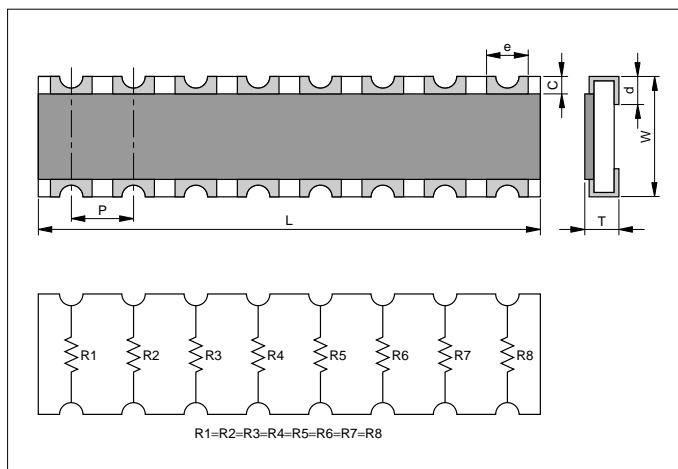

| Code       | L        | W           | T              | P      | c       |
|------------|----------|-------------|----------------|--------|---------|
| Dimensions | 6.4±0.2  | 1.6±0.2     | 0.6±0.1        | 0.8typ | 0.3±0.2 |
| Code       | d        | e(Top side) | e(Bottom side) |        |         |
| Dimensions | 0.4±0.15 | 0.5±0.1     | 0.4±0.15       |        |         |

## Rating

| Chip Resistor Arrays  |               |
|-----------------------|---------------|
| Item                  | Rating        |
| Rated power(70°C)     | 1/16W/element |
| Max working voltage*  | 50V           |
| Max over-load voltage | 100V          |
| Resistance value      | 10Ω to 1MΩ    |
| Tolerance             | G:±2%         |
| Working temperature   | -55 to +125°C |
| Number of elements    | 8E:8elements  |


\* Rated Voltage :  $\sqrt{\text{Rated power} \times \text{Resistance value}}$ , whichever is less.

\* Standard Resistance Value: E-6 Series



\* Please contact sales engineer for any other requirements of the nominal resistance value and the tolerance.

Recommended Land Patterns is referred the following for example


(Unit : mm)

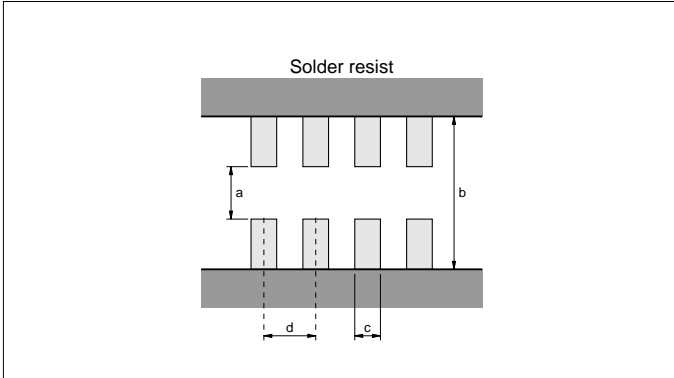


| Series   | a   | b   | c    | d    |
|----------|-----|-----|------|------|
| CRA3A4E  | 0.8 | 2.4 | 0.4  | 0.8  |
| CRB3A4E  | 0.7 | 2.3 | 0.4  | 0.8  |
| CRC3A4E  | 0.8 | 2.4 | 0.4  | 0.8  |
| CRB2A4E  | 0.4 | 1.5 | 0.25 | 0.5  |
| CRB11A2E | 0.4 | 1.5 | 0.25 | 0.5  |
| CRC11A2E | 0.5 | 1.5 | 0.4  | 0.65 |
| CRC4A8E  | 0.8 | 2.4 | 0.3  | 0.5  |
| CRB6A8E  | 0.7 | 2.3 | 0.4  | 0.8  |
| ATC1A    | 0.5 | 1.5 | 0.4  | 0.65 |

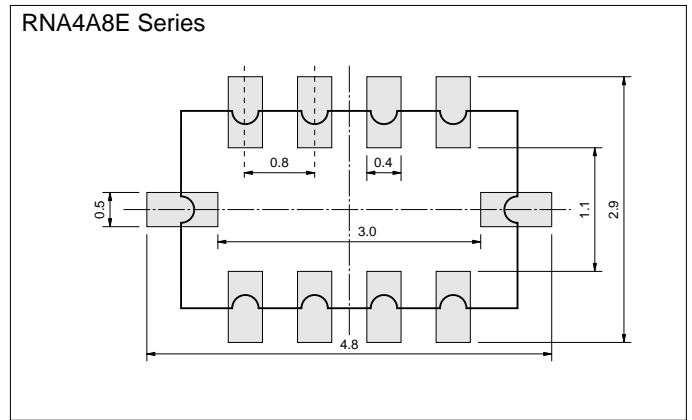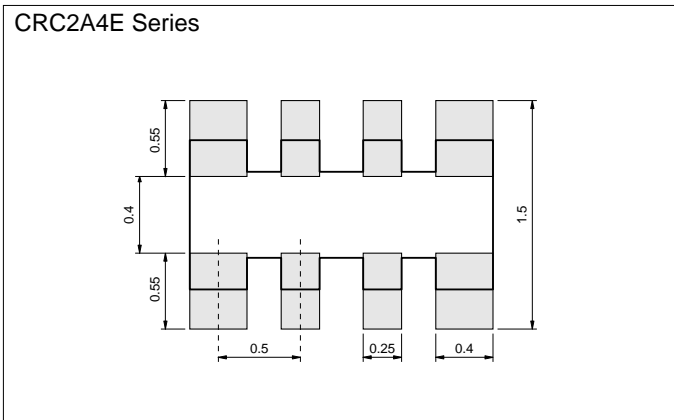

**Electrical Characteristics**
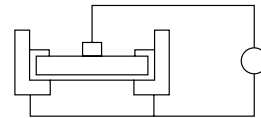
| Item                                     | Standard  |  | Test Conditions  |  |              |  |  |  |   |  |
|--|---|--|--|--|--------------|--|--|--|---|--|
|  | Resistor  | Jumper   | Resistor   | Jumper   |              |  |  |  |   |  |
| DC Resistance                            | Within Initial Tolerance  |  | Power Condition A<br>(20°C, 65%RH)   |  |              |  |  |  |   |  |
| Temperature Characteristics              | <table border="1"> <tr> <th>Resistance(Ω)</th> <th>TCR(ppm/°C)</th> </tr> <tr> <td>*D, F<br/>10≤R≤1M</td> <td>-100 to +100</td> </tr> <tr> <td>J, CR05:F<br/>R &lt;10<br/>10≤ R ≤1M<br/>1M&lt; R</td> <td>-100 to +600<br/>-250 to +250<br/>-500 to +300</td> </tr> </table>                                    | Resistance(Ω)  | TCR(ppm/°C)  | *D, F<br>10≤R≤1M   | -100 to +100 | J, CR05:F<br>R <10<br>10≤ R ≤1M<br>1M< R | -100 to +600<br>-250 to +250<br>-500 to +300 |  | Test Temperature: 25,125(°C)<br>$\Delta R/R = R_2 - R_1 / R_1 \times 1 / T_2 - T_1 \times 10^6$<br>$\Delta R/R$ : Temp. Coefficient (ppm/°C)<br>T <sub>1</sub> : 25(°C)<br>T <sub>2</sub> : 125(°C)<br>R <sub>1</sub> : T <sub>1</sub> Resistance at (Ω)<br>R <sub>2</sub> : T <sub>2</sub> Resistance at (Ω) |  |
|  | Resistance(Ω)   | TCR(ppm/°C)  |  |  |              |  |  |  |   |  |
| *D, F<br>10≤R≤1M                         | -100 to +100  |  |  |  |              |  |  |  |   |  |
| J, CR05:F<br>R <10<br>10≤ R ≤1M<br>1M< R | -100 to +600<br>-250 to +250<br>-500 to +300  |  |  |  |              |  |  |  |   |  |
| *Except CR05                             |   |  |  |  |              |  |  |  |   |  |
| Short-time Overload                      | ΔR/R  | ±(2.0%+0.10Ω)max of the initial value                  | 50mΩmax  | (1) Apply 2.0×rated voltage for 5sec. (2.5×rated voltage for Arrays)<br>(2) Wait 30minutes<br>(3) Measure resistance<br>CR03: 30Vmax<br>CR05: 50Vmax<br>CR10: 100Vmax<br>CR21: 200Vmax<br>CR32: 400Vmax<br>CRA3A, CRB3A, CRC3A : 100V max  |              |  |  |  |   |  |
|  | Visual  | No evidence of mechanical damage intermittent overload |  | (1) 2A for 5sec. (CJ03: 1A)<br>(2) Wait 30minutes<br>(3) Measure resistance  |              |  |  |  |   |  |
| Intermittent Overload                    | ΔR/R  | ±(5%+0.1Ω)max of the initial value                     | 50mΩmax  | (1) Perform 10000voltage cycles as follows:<br>ON(2.0×rated voltage, 2.5×for Arrays ) 1sec.<br>OFF 25sec.<br>(2) Stabilization time 30min without loading<br>(3) Measure resistance<br>CR03: 30Vmax<br>CR05: 50Vmax<br>CR10: 100Vmax<br>CR21: 200Vmax<br>CR32: 400Vmax<br>CRA3A, CRB3A, CRC3A : 100V max |              |  |  |  |   |  |
|  | Visual  | No evidence of mechanical damage                       |  | (1) Perform 10000 current cycles as follows:<br>ON(2A) 1sec.<br>OFF 25sec.<br>(2) Wait 30minutes<br>(3) Measure resistance<br>CJ03: 1A max   |              |  |  |  |   |  |
| Dielectric Withstanding Voltage          | No evidence of mechanical damage  |  | Apply 500VAC for 1min (CR10 300VAC)<br>(CR05, CRA3A, CRB3A, CRC3A 300VAC/1sec.<br>CR03 50VAC/1min.)  |  |              |  |  |  |   |  |
| Insulation Resistance                    | <ul style="list-style-type: none"> <li>■CR03, CJ03 : 10<sup>8</sup>Ωmin</li> <li>■CR05, CJ05 : 10<sup>8</sup>Ωmin</li> <li>■CR10, CJ10 : 10<sup>9</sup>Ωmin</li> <li>■CR21, CJ21 : 10<sup>10</sup>Ωmin</li> <li>■CR32, CJ32 : 10<sup>12</sup>Ωmin</li> <li>■CRA3A, CRB3A, CRC3A : 10<sup>9</sup>Ωmin</li> </ul> |  |  <p>Apply 500V DC.<br/>(CR05, CRA3A, CRB3A, CRC3A 100V DC<br/>CR03 50VDC)</p> |  |              |  |  |  |   |  |

**Mechanical Characteristics**
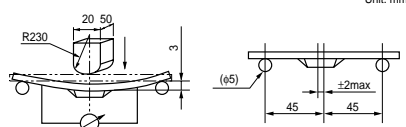
| Item                      |              | Standard   |                  | Test Conditions  |        |
|---------------------------|--------------|--|------------------|--|--------|
|                           |              | Resistor   | Jumper           | Resistor   | Jumper |
| Terminal Strength         | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max of the initial value   | 50m $\Omega$ max | Apply the load as show:<br>Measure resistance during load application  |        |
|                           | Visual       | No evidence of mechanical damage after loading   |                  |   |        |
| Soldering Heat Resistance | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max of the initial value   | 50m $\Omega$ max | Immerse into molten solder at 260 $\pm$ 5 $^{\circ}$ C for 10 $\pm$ 1sec. Stabilize component at room temperature for 1hr. Measure resistance.                       |        |
|                           | Visual       | No evidence of leaching                          |                  |  |        |
| Solderability             |              | Coverage $\geq$ 95% each termination end         |                  | Immerse in Rogin Flux for 2 $\pm$ 0.5 sec. and in SN62 solder at 235 $\pm$ 5 $^{\circ}$ C for 2 $\pm$ 0.5 sec.   |        |
| Anti-Vibration Test       | $\Delta R/R$ | $\pm(1\%+0.1\Omega)$ max of the initial value    | 50m $\Omega$ max | 2 hrs. each in X, Y and Z axis. (TTL 6hrs.)10 to 55 Hz sweep in 1min.at 1.5mm amplitude.   |        |
|                           | Visual       | No evidence of mechanical damage                 |                  |  |        |
| Solvent Resistance        | $\Delta R/R$ | $\pm(0.5\%+0.05\Omega)$ max of the initial value | 50m $\Omega$ max | Immerse in static state butyl acetate at 20 $^{\circ}$ C to 25 $^{\circ}$ C for 30 $\pm$ 5sec. Stabilize component at room temperature for 30min then measure Value. |        |
|                           | Visual       | No evidence of mechanical damage                 |                  |  |        |

**Environmental Characteristics**

| Item                     |              | Standard                                       |                  | Test Conditions  |        |
|--------------------------|--------------|--|------------------|--|--------|
|                          |              | Resistor                                       | Jumper           | Resistor   | Jumper |
| Temperature Cycle        | $\Delta R/R$ | $\pm(1\%+0.05\Omega)$ max of the initial value | 50m $\Omega$ max | 1) Run 5cycles as follows: -55 $\pm$ 3 $^{\circ}$ C for 30min. 125 $\pm$ 3 $^{\circ}$ C for 30min. Room temp for 10-15min. 2) Stabilize component at room temperature for 1hr. then measure value.       |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |
| Low Temperature Storage  | $\Delta R/R$ | $\pm(2\%+0.1\Omega)$ max of the initial value  | 50m $\Omega$ max | 1) Dwell in -55 $^{\circ}$ C chamber without loading for 1000 $^{+48}_{-0}$ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.   |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |
| High Temperature Storage | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max of the initial value  | 50m $\Omega$ max | 1) Dwell in 125 $^{\circ}$ C chamber without loading for 1000 $^{+48}_{-0}$ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.   |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |
| Moisture Resistance      | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max of the initial value  | 50m $\Omega$ max | 1) Dwell in temp: 65 $^{\circ}$ C RH90 to 95%RH chamber without loading for 1000 $^{+48}_{-0}$ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.                              |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |
| Life Test                | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max of the initial value  | 50m $\Omega$ max | 1) Temp: 70 $\pm$ 3 $^{\circ}$ C Voltage: (rated voltage) on 90 min off 30min. Duration: 1000 $^{+48}_{-0}$ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.                 |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |
| Loading Life in Moisture | $\Delta R/R$ | $\pm(3\%+0.1\Omega)$ max of the initial value  | 50m $\Omega$ max | 1) Temp: 40 $\pm$ 2 $^{\circ}$ C RH: 90-95% Voltage Cycle: on 90 min(rated voltage) off 30min. Duration: 1000 $^{+48}_{-0}$ hrs. 2) Stabilize component at room temperature for 1hr. then measure value. |        |
|                          | Visual       | No evidence of mechanical damage               |                  |  |        |



### Circuit design

- 1) Once application and assembly environments have been checked, the resistors may be used in conformance with the catalog and the specifications.
- 2) Please consult the manufacturer in advance when the resistors is used in devices such as: devices which deal with human life, I.e. medical devices; devices which are highly public oriented; and devices which demand a high standard of liability.
- 3) Please use the resistors in conformance with the operating temperature provided in both the catalog and the specifications.
- 4) Please keep voltage under the rated voltage which is applied to the resistor.
- 5) Do not use the resistor in an environment where it might easily exceed the respective provisions concerning shock and vibration specified in the catalog and specifications.
- 6) Please do not use the resistor in the following environments.
  - ① State that water, oil, and solvent hang in resistor
  - ② State where poisonous gas (sulfur and chlorine, etc.) exists
  - ③ State that direct sunshine, radiation, and ultraviolet, etc. are irradiated
- 7) There is a thing that resistance changes according to the stuff of the resin when the coating with the resin is given. Please use resin coating after confirming the characteristic.
- 8) There is a thing that resistance changes according to flux and cleaner. Please use flux and cleaner after confirming the characteristic.
- 9) Please consult about a lead free products.

### Storage

- 1) Keep storage place temperature +5 to +35°C, humidity 45 to 75% RH.
- 2) Please keep parts out of poisonous gas such as sulfur or chlorine in the air, and out of salty moisture. Or they may cause rust of terminal, and poor solderability. and, please consider the above-mentioned item after mounting your company.


#### 4) Soldering iron

|                    |                          |
|--------------------|--------------------------|
| <b>Temperature</b> | soldering iron 300±5°C * |
| <b>Time</b>        | 3 sec. max. *            |


\*Do not place the soldering iron on the chip. Soldering iron is 30W max.

### Soldering method

#### 1) Recommendable temperature profile

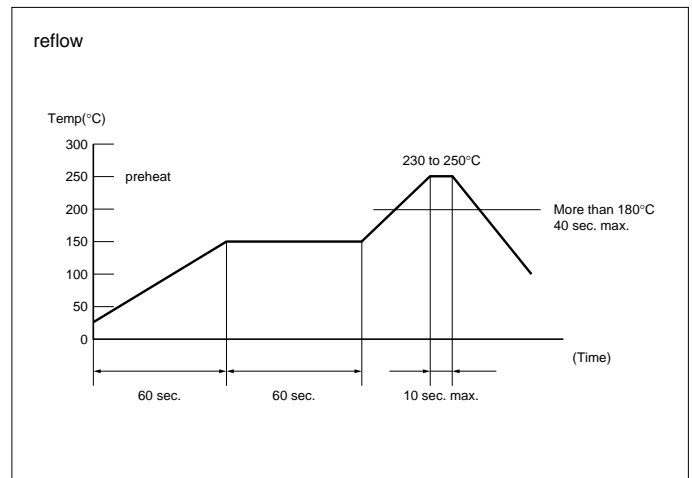

#### 2) Recommendable temperature profile

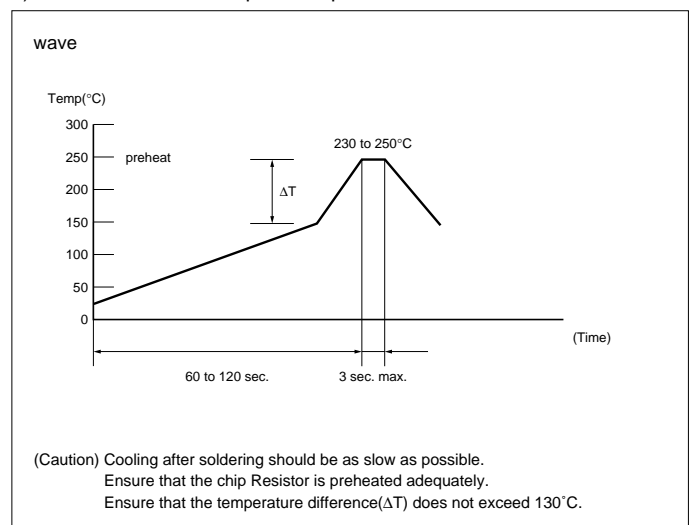

#### 3) pb-free recommendable temperature profile

