

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .


Uni- and Bipolar Hall IC Switches for Magnetic Field Applications

TLE 4905 G; TLE 4935 G
TLE 4935-2 G; TLE 4945-2 G

Bipolar IC

Features

- Temperature compensated magnetic performance
- Digital output signal
- For unipolar and alternating magnetic fields
- Large temperature range
- Protection against reversed polarity
- Output protection against electrical disturbances



| Type | Ordering Code | Package |
|--------------|---------------|---------|
| TLE 4905 G | Q62705-K402 | SOT-89 |
| TLE 4935 G | Q62705-K404 | SOT-89 |
| TLE 4935-2 G | Q62705-K405 | SOT-89 |
| TLE 4945-2 G | Q62705-K403 | SOT-89 |

TLE 4905/35/35-2/45-2 (Unipolar/Bipolar Magnetic Field Switches) have been designed specifically for automotive and industrial applications. Reverse polarity protection is included on-chip as is output protection against negative voltage transients.

Typical applications are position/proximity indicators, brushless DC motor commutation, rotational indexing etc.

■ 8235605 0134275 433 ■

Pin Configuration
(top view)

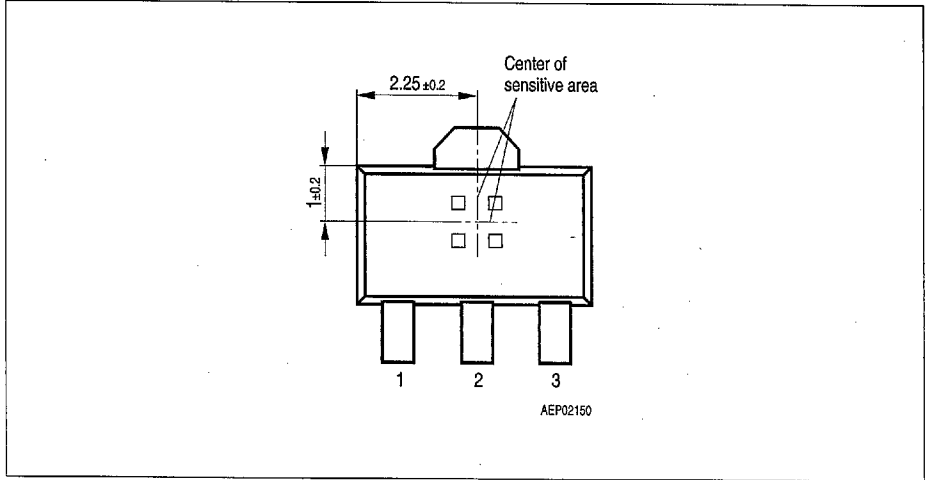


Figure 1

Pin Definitions and Functions

| Pin No. | Symbol | Function |
|---------|--------|----------------|
| 1 | V_s | Supply voltage |
| 2 | GND | Ground |
| 3 | Q | Output |

8235605 0134276 37T

Circuit Description

The circuit includes Hall generator, amplifier and Schmitt-Trigger on one chip. The internal reference provides the supply voltage for the components. A magnetic field perpendicular to the chip surface induces a voltage at the hall probe. This voltage is amplified and switches a Schmitt-trigger with open-collector output. A protection diode against reverse power supply is integrated.

The output is protected against electrical disturbances.

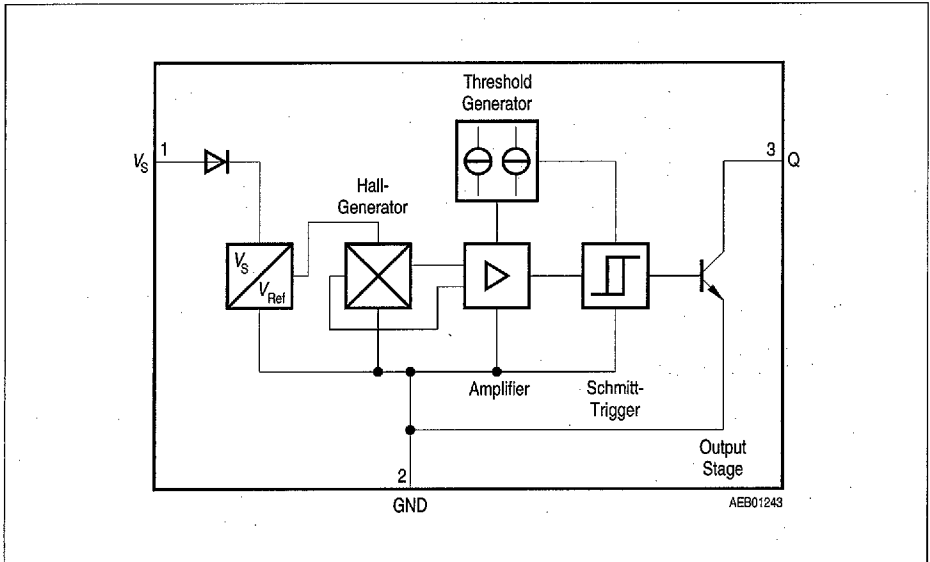


Figure 2 Block Diagram

8235605 0134277 206

Functional Description Unipolar Type TLE 4905 (Figure 3 and 4)

When a positive magnetic field is applied in the indicated direction (**Figure 3**) and the turn-on magnetic induction B_{OP} is exceeded, the output of the Hall-effect IC will conduct (Operate Point). When the magnetic field is reduced to a value smaller than the release point, the output of the IC turns off (Release Point; **Figure 4**).

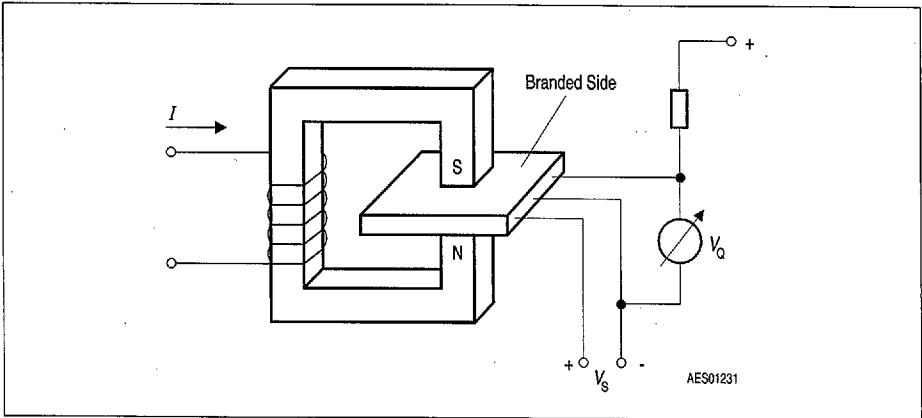


Figure 3 Sensor/Magnetic-Field Configuration

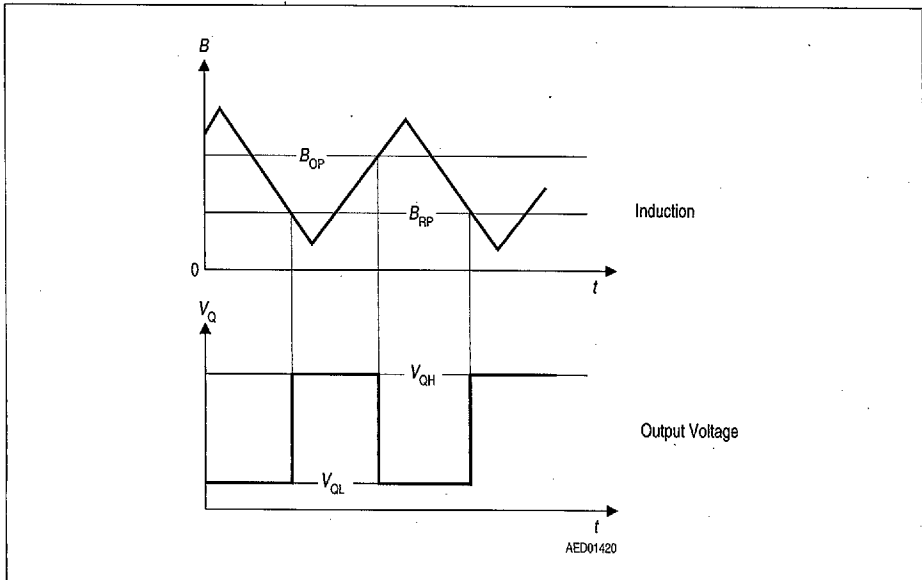


Figure 4 Switching Characteristics Unipolar Type

Functional Description Bipolar Type TLE 4935/35-2/45-2 (Figure 5 and 6)

When a positive magnetic field is applied in the indicated direction (**Figure 5**) and the turn-on magnetic induction B_{OP} is exceeded, the output of the Hall-effect IC will conduct (Operate Point). The output state does not change unless a reverse magnetic field exceeding the turn-off magnetic induction $|B_{RP}|$ is exceeded. In this case the output will turn off (Release Point; **Figure 6**).

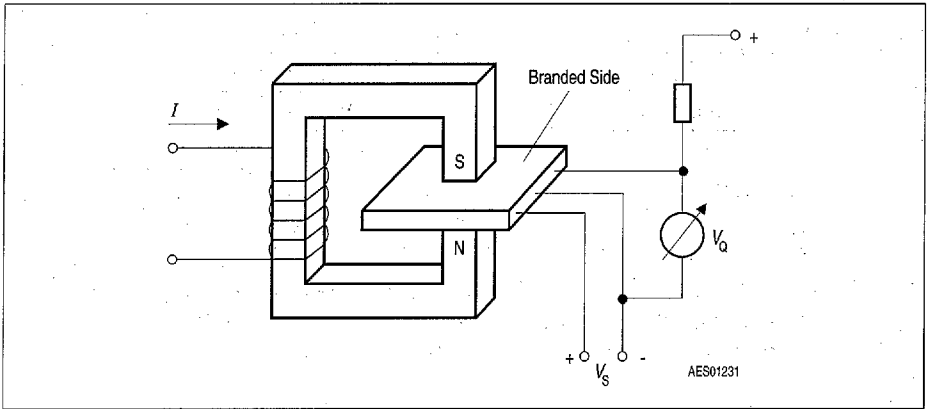


Figure 5 Sensor/Magnetic-Field Configuration

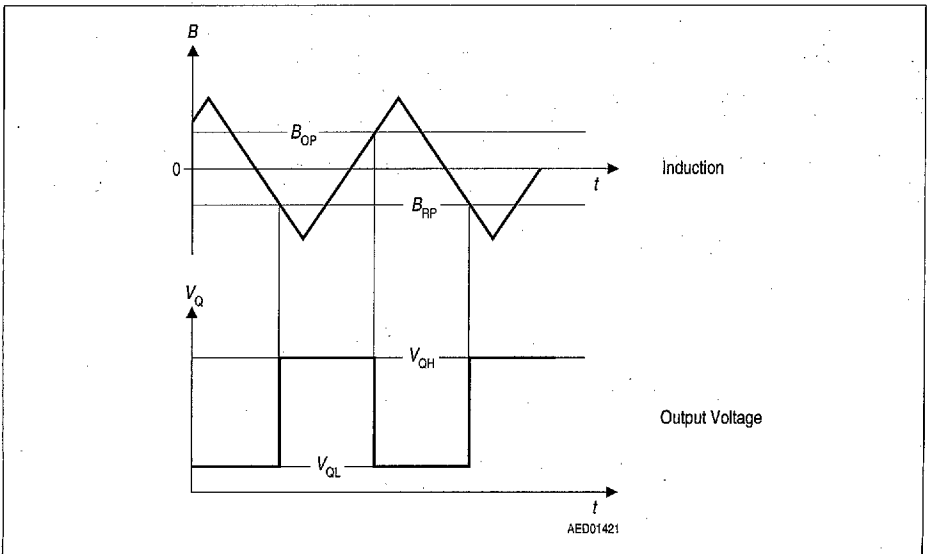


Figure 6 Switching Characteristics Bipolar Type

Absolute Maximum Ratings

$T_j = -40$ to 150 °C

| Parameter | Symbol | Limit Values | | Unit | Remarks |
|------------------------|-------------|--------------|------|------|-------------------------|
| | | min. | max. | | |
| Supply voltage | V_S | -40 | 32 | V | - |
| Supply voltage | V_S | - | 40 | V | $t < 400$ ms; $v = 0.1$ |
| Output voltage | V_Q | - | 32 | V | - |
| Output current | I_Q | - | 100 | mA | - |
| Output reverse current | $-I_Q$ | - | 100 | mA | - |
| Junction temperature | T_j | -40 | 150 | °C | - |
| Storage temperature | T_{stg} | -50 | 150 | °C | - |
| Thermal resistance | $R_{th,JA}$ | | 100 | K/W | - |

Note: Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Operating Range

| Parameter | Symbol | Limit Values | | Unit | Remarks |
|----------------------|--------|--------------|------|------|---------|
| | | min. | max. | | |
| Supply voltage | V_S | 4.0 | 18 | V | - |
| Junction temperature | T_j | -40 | 125 | °C | - |

Note: In the operating range the functions given in the circuit description are fulfilled.

8235605 0134280 8T0

AC/DC Characteristics

$4.0\text{ V} \leq V_S \leq 24\text{ V}$; $-40\text{ }^\circ\text{C} \leq T_j \leq 150\text{ }^\circ\text{C}$

| Parameter | Symbol | Limit Values | | | Unit | Test Condition | Test Circuit |
|---------------------------|--------------------|--------------|------|------|---------------|---|--------------|
| | | min. | typ. | max. | | | |
| Supply current | I | 1.6 | – | 5.0 | mA | | 1 |
| | I_{SHigh} | – | 2.5 | – | mA | $B < B_{\text{RP}}$ | 1 |
| | I_{SLow} | – | 3.5 | – | mA | $B > B_{\text{OP}}$ | 1 |
| Output saturation voltage | V_{QSat} | – | 0.25 | 0.5 | V | $I_{\text{Q}} = 40\text{ mA}$ | 1 |
| Output leakage current | I_{QL} | – | – | 10 | μA | $V_{\text{Q}} = 18\text{ V}$ | 1 |
| Rise/fall time | t_r / t_f | – | – | 1 | μs | $R_{\text{L}} = 1.2\text{ k}\Omega$ $C_{\text{L}} \leq 33\text{ pF}$ | 1 |

Note: The listed characteristics are ensured over the operating range of the integrated circuit. Typical characteristics specify mean values expected over the production spread. If not otherwise specified, typical characteristics apply at $T_j = 25\text{ }^\circ\text{C}$ and the given supply voltage.

Note: Moderate changes may occur during the development process or customer discussion.

8235605 0134281 737

Magnetic Characteristics

4.0 V ≤ V_S ≤ 24 V

| Parameter | Symbol | Limit Values | | | | | | | | Unit |
|-----------|--------|-------------------|------|------------------------|------|--------------------------|------|---------------------------|------|------|
| | | TLE 4905 unipolar | | TLE 4935 bipolar latch | | TLE 4935-2 bipolar latch | | TLE 4945-2 bipolar switch | | |
| | | min. | max. | min. | max. | min. | max. | min. | max. | |

Junction Temperature T_j = -40 °C

| | | | | | | | | | | |
|--|------------------|-----|-----|-----|-----|-----|-----|----|---|----|
| Turn-ON induction | B _{OP} | 7.5 | 19 | 10 | 20 | 15 | 27 | -3 | 6 | mT |
| Turn-OFF induction | B _{RP} | 5.5 | 17 | -20 | -10 | -27 | -15 | -6 | 3 | mT |
| Hysteresis (B _{OP} -B _{RP}) | ΔB _{HY} | 2 | 6.5 | 20 | 40 | 30 | 54 | 1 | 5 | mT |

Junction Temperature T_j = 25 °C

| | | | | | | | | | | |
|--|------------------|---|----|-----|-----|-----|-----|----|---|----|
| Turn-ON induction | B _{OP} | 7 | 18 | 10 | 20 | 14 | 26 | -3 | 6 | mT |
| Turn-OFF induction | B _{RP} | 5 | 16 | -20 | -10 | -26 | -14 | -6 | 3 | mT |
| Hysteresis (B _{OP} -B _{RP}) | ΔB _{HY} | 2 | 6 | 20 | 40 | 28 | 52 | 1 | 5 | mT |

Junction Temperature T_j = 85 °C


| | | | | | | | | | | |
|--|------------------|-----|------|-----|-----|-----|-----|----|---|----|
| Turn-ON induction | B _{OP} | 6.5 | 17.5 | 10 | 20 | 13 | 26 | -3 | 6 | mT |
| Turn-OFF induction | B _{RP} | 4.5 | 15 | -20 | -10 | -26 | -13 | -6 | 3 | mT |
| Hysteresis (B _{OP} -B _{RP}) | ΔB _{HY} | 2 | 5.5 | 20 | 40 | 26 | 52 | 1 | 5 | mT |

Junction Temperature T_j = 125 °C


| | | | | | | | | | | |
|--|------------------|---|----|-----|-----|-----|-----|----|---|----|
| Turn-ON induction | B _{OP} | 6 | 17 | 10 | 20 | 12 | 25 | -3 | 6 | mT |
| Turn-OFF induction | B _{RP} | 4 | 14 | -20 | -10 | -25 | -12 | -6 | 3 | mT |
| Hysteresis (B _{OP} -B _{RP}) | ΔB _{HY} | 2 | 5 | 20 | 40 | 24 | 50 | 1 | 5 | mT |

Note: The listed characteristics are ensured over the operating range of the integrated circuit. Typical characteristics specify mean values expected over the production spread. If not otherwise specified, typical characteristics apply at T_j = 25 °C and the given supply voltage.

8235605 0134282 673

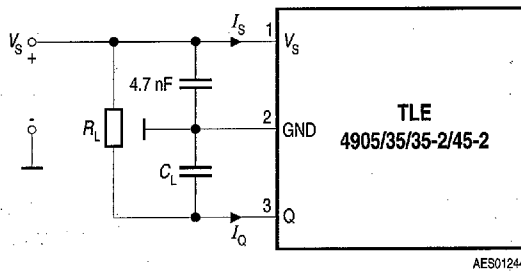

Unipolar Type TLE 4905

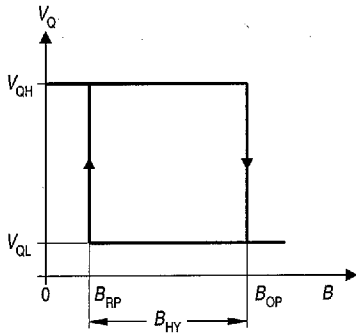

Bipolar Type TLE 4935

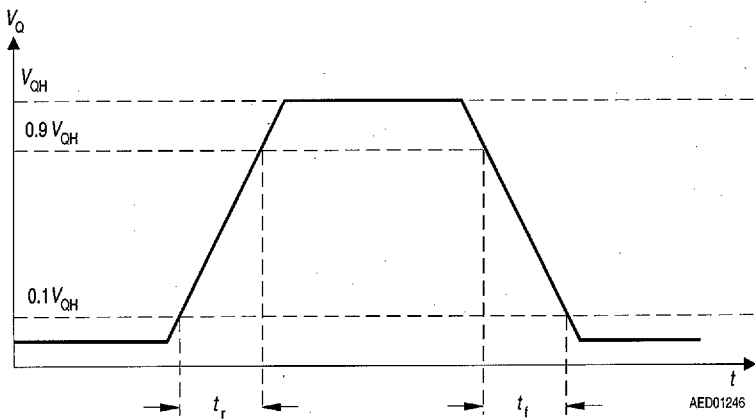
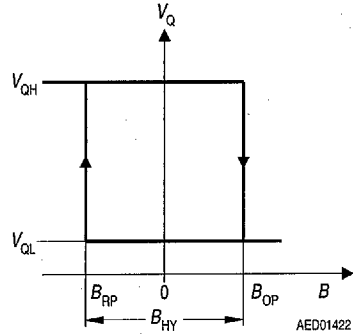


Figure 7 Test Circuit 1

8235605 0134283 50T


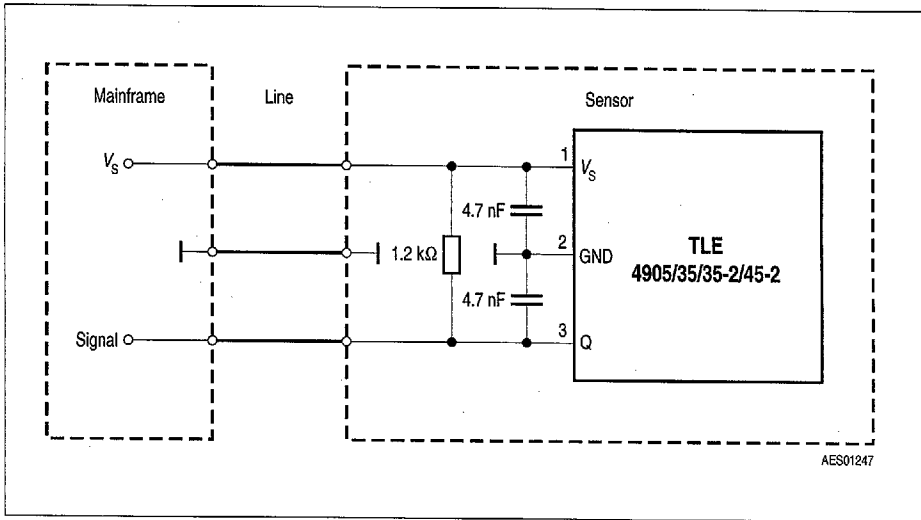


Figure 8 Application Circuit


8235605 0134284 446

If not otherwise specified, all curves reflect typical values at $T_j = 25^\circ\text{C}$ and $V_S = 12\text{ V}$.


Quiescent Current Difference versus Temperature

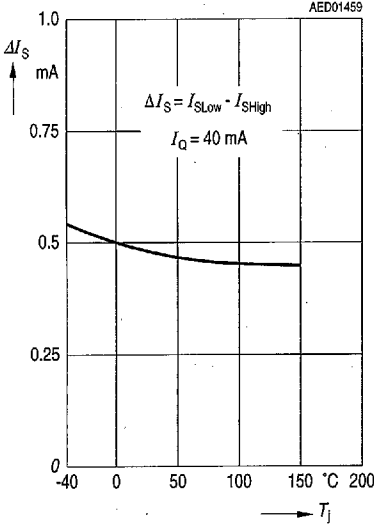


Saturation Voltage versus Output Current

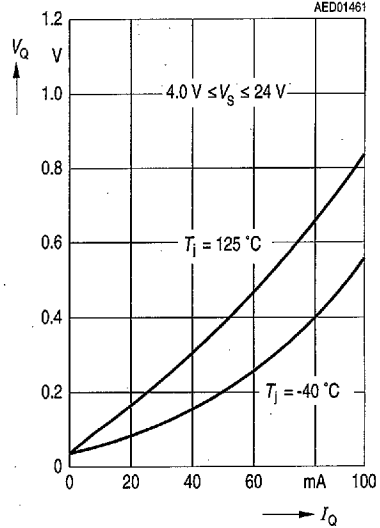


Quiescent Current versus Junction Temperature

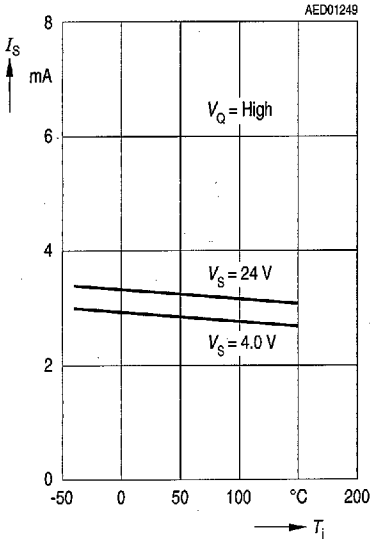


TLE 4905 Operate-and Release-Point versus Junction Temperature

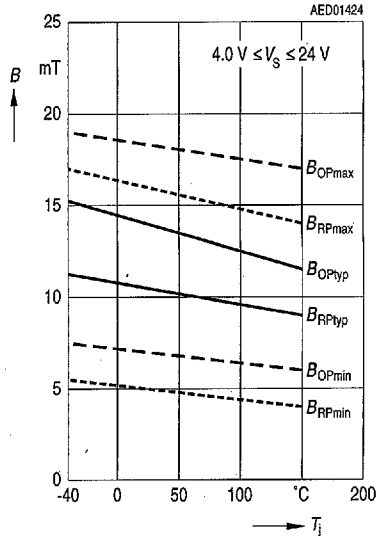


TLE 4935 Operate-and Release-Point versus Junction Temperature

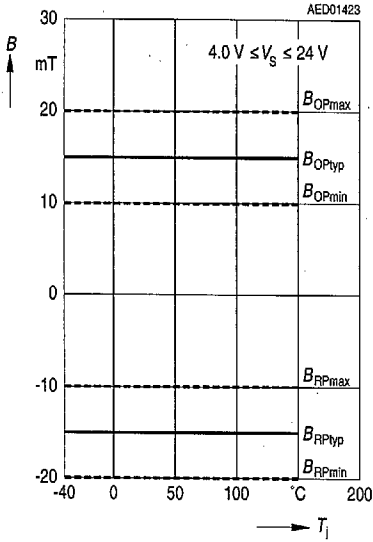


TLE 4935-2 Operate-and Release-Point versus Junction Temperature

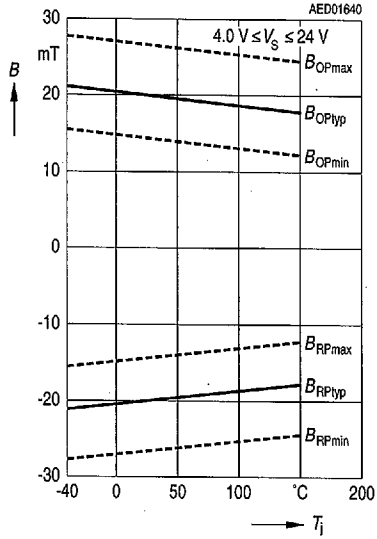


TLE 4905 Hysteresis versus Junction Temperature

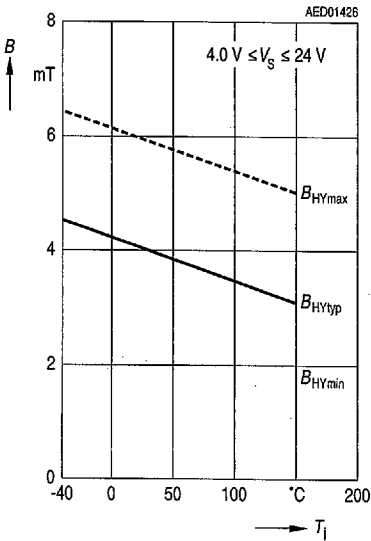


TLE 4945-2 Operate-and Release-Point versus Junction Temperature

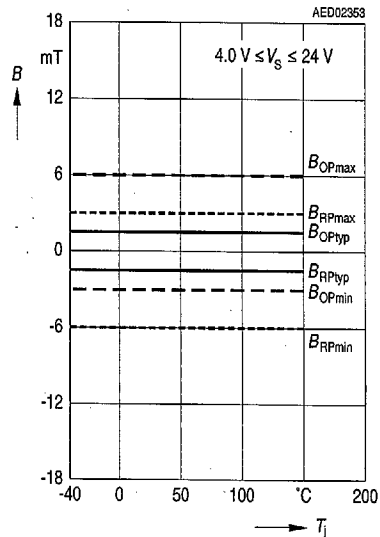

Package Outline

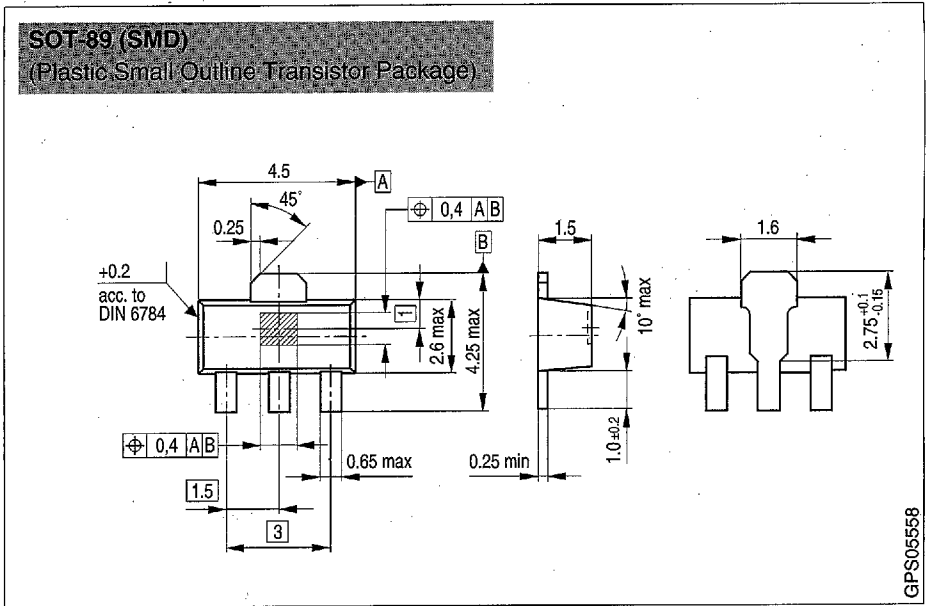

Package Information

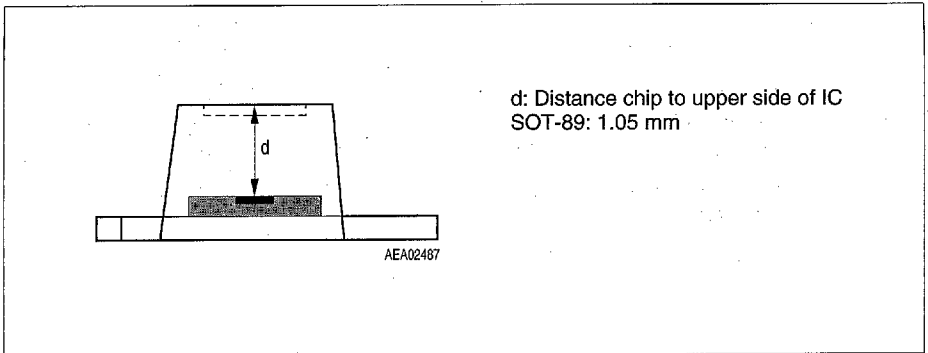

Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm