

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# KLK SERIES 10x38 FUSES

600 Vac/500 Vdc • 1/10-30 A • Fast Acting



## Specifications

|                               |  |
|-------------------------------|--|
| <b>Voltage Rating:</b>        | 600 Vac / 500 Vdc  |
| <b>Amperage Rating:</b>       | 1/10, 1/8, 2/10, 1/4, 3/10, 1/2, 3/4, 1, 1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20, 25, 30 |
| <b>Interrupting Ratings:</b>  | AC: 100 kA<br>200 kA Littelfuse self-certified<br>DC: 50 kA  |
| <b>Material:</b>              | Body: Melamine / Caps: Copper Alloy  |
| <b>Operating Temperature:</b> | See Rating Curve   |
| <b>Approvals:</b>             | UL 248-14 Listed (File: E10480)<br>CSA Certified (File: LR29862)<br>QPL (File: F60C)<br>CE                   |
| <b>Country of Origin:</b>     | Mexico   |
| <b>Environmental:</b>         | RoHS Compliant   |

## Description

Fast-Acting, High-Interrupting Capacity, Current-Limiting Type Fuse. Especially suited for control circuits, street lighting, HID lighting, computers, and other applications without high in-rush currents.


## Features/Benefits

- UL approved
- 1/10 - 30 A ratings available
- 100,000 A Interrupting Rating

## Applications

- Control Circuits
- Street lighting, HID lighting
- Computers

## Dimensions Inches (mm)

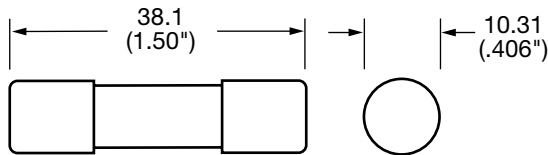


## Recommended Fuse Holders

- Littelfuse LFPSM Dead-Front Series
- Littelfuse LEB Series
- Littelfuse L60030M Series

## Web Resources


Download CAD drawings and other technical information:  
[littelfuse.com/klk](http://littelfuse.com/klk)

## Part Numbering System

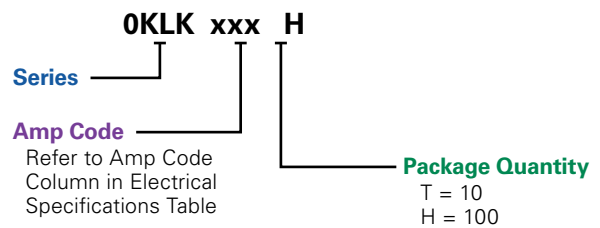

| SERIES | AMP | PACKAGE QUANTITY | CATALOG NUMBER | ORDERING NUMBER |
|--------|-----|------------------|----------------|-----------------|
| OKLK   | 1/8 | 10               | OKLK.125       | OKLK.125T       |
| OKLK   | 5   | 100              | OKLK005        | OKLK005.H       |

## Temperature Derating Curve (Temperature of Air Immediately Surrounding Fuse)

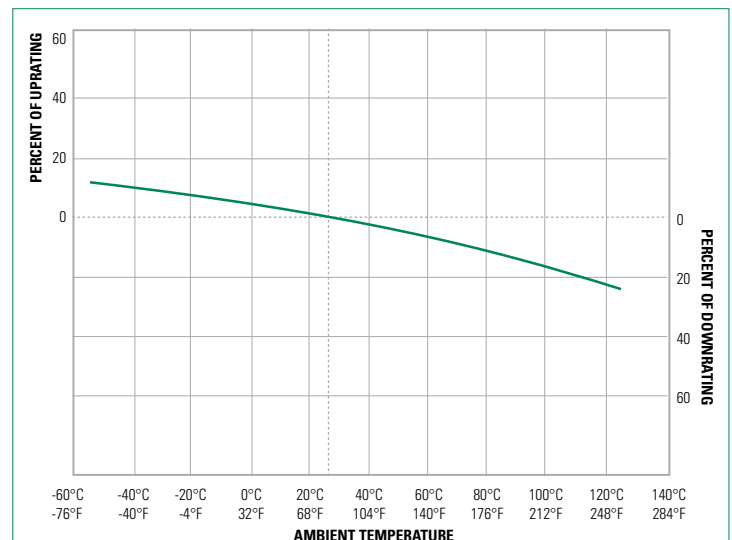

# KLK SERIES 10x38 FUSES

## Ordering Information


| AMP RATING | AMP CODE | CATALOG NUMBER | ORDERING NUMBER | VOLTAGE |     | INTERRUPTING RATING (kA) |    | UPC         | WEIGHT LB (G) | AGENCY APPROVALS |     |
|------------|----------|----------------|-----------------|---------|-----|--------------------------|----|-------------|---------------|------------------|-----|
|            |          |                |                 | AC      | DC  | AC                       | DC |             |               | UL               | CSA |
| 1/10       | .100     | OKLK 1/10      | OKLK.100T       | 600     | 500 | 100                      | 50 | 07945825011 | .013 (5.90)   | •                | •   |
| 1/8        | .125     | OKLK 1/8       | OKLK.125T       | 600     | 500 | 100                      | 50 | 07945825012 | .013 (5.90)   | •                | •   |
| 2/10       | .20      | OKLK 2/10      | OKLK.200T       | 600     | 500 | 100                      | 50 | 07945825018 | .013 (5.90)   | •                | •   |
| 1/4        | .250     | OKLK 1/4       | OKLK.250T       | 600     | 500 | 100                      | 50 | 07945825019 | .013 (5.90)   | •                | •   |
| 3/10       | .300     | OKLK 3/10      | OKLK.300T       | 600     | 500 | 100                      | 50 | 07945825020 | .013 (5.90)   | •                | •   |
| 1/2        | .500     | OKLK 1/2       | OKLK.500T       | 600     | 500 | 100                      | 50 | 07945825024 | .013 (5.90)   | •                | •   |
| 3/4        | .750     | OKLK 3/4       | OKLK.750T       | 600     | 500 | 100                      | 50 | 07945825029 | .013 (5.90)   | •                | •   |
| 1          | 001.     | OKLK 1         | OKLK001.T       | 600     | 500 | 100                      | 50 | 07945825031 | .013 (5.90)   | •                | •   |
| 1 1/2      | 01.5     | OKLK 1 1/2     | OKLK01.5T       | 600     | 500 | 100                      | 50 | 07945825037 | .013 (5.90)   | •                | •   |
| 2          | 002.     | OKLK 2         | OKLK002.T       | 600     | 500 | 100                      | 50 | 07945825041 | .017 (7.71)   | •                | •   |
| 2 1/2      | 02.5     | OKLK 2 1/2     | OKLK02.5T       | 600     | 500 | 100                      | 50 | 07945825043 | .017 (7.71)   | •                | •   |
| 3          | 003.     | OKLK 3         | OKLK003.T       | 600     | 500 | 100                      | 50 | 07945825047 | .017 (7.71)   | •                | •   |
| 3 1/2      | 03.5     | OKLK 3 1/2     | OKLK03.5T       | 600     | 500 | 100                      | 50 | 07945825048 | .017 (7.71)   | •                | •   |
| 4          | 004.     | OKLK 4         | OKLK004.T       | 600     | 500 | 100                      | 50 | 07945825053 | .017 (7.71)   | •                | •   |
| 5          | 005.     | OKLK 5         | OKLK005.T       | 600     | 500 | 100                      | 50 | 07945825055 | .017 (7.71)   | •                | •   |
| 6          | 006.     | OKLK 6         | OKLK006.T       | 600     | 500 | 100                      | 50 | 07945825058 | .017 (7.71)   | •                | •   |
| 7          | 007.     | OKLK 7         | OKLK007.T       | 600     | 500 | 100                      | 50 | 07945825061 | .017 (7.71)   | •                | •   |
| 8          | 008.     | OKLK 8         | OKLK008.T       | 600     | 500 | 100                      | 50 | 07945825063 | .017 (7.71)   | •                | •   |
| 9          | 009.     | OKLK 9         | OKLK009.T       | 600     | 500 | 100                      | 50 | 07945825064 | .017 (7.71)   | •                | •   |
| 10         | 010.     | OKLK 10        | OKLK010.T       | 600     | 500 | 100                      | 50 | 07945825065 | .017 (7.71)   | •                | •   |
| 12         | 012.     | OKLK 12        | OKLK012.T       | 600     | 500 | 100                      | 50 | 07945825067 | .017 (7.71)   | •                | •   |
| 15         | 015.     | OKLK 15        | OKLK015.T       | 600     | 500 | 100                      | 50 | 07945825068 | .017 (7.71)   | •                | •   |
| 20         | 020.     | OKLK 20        | OKLK020.T       | 600     | 500 | 100                      | 50 | 07945825071 | .017 (7.71)   | •                | •   |
| 25         | 025.     | OKLK 25        | OKLK025.T       | 600     | 500 | 100                      | 50 | 07945825072 | .017 (7.71)   | •                | •   |
| 30         | 030.     | OKLK 30        | OKLK030.T       | 600     | 500 | 100                      | 50 | 07945825073 | .017 (7.71)   | •                | •   |

## Electrical Specification – Agency Requirements


| AMPERAGE RATING | OPENING TIME (MINUTES)    |                           |                           |
|-----------------|---------------------------|---------------------------|---------------------------|
|                 | 100% of Amp Rating per UL | 135% of Amp Rating per UL | 200% of Amp Rating per UL |
| 1/10-30         | Temperature Stabilization | 60 Max                    | 2 Max                     |

# KLK SERIES 10x38 FUSES

**Time Current Curve (1/10 - 2 1/2 A)**

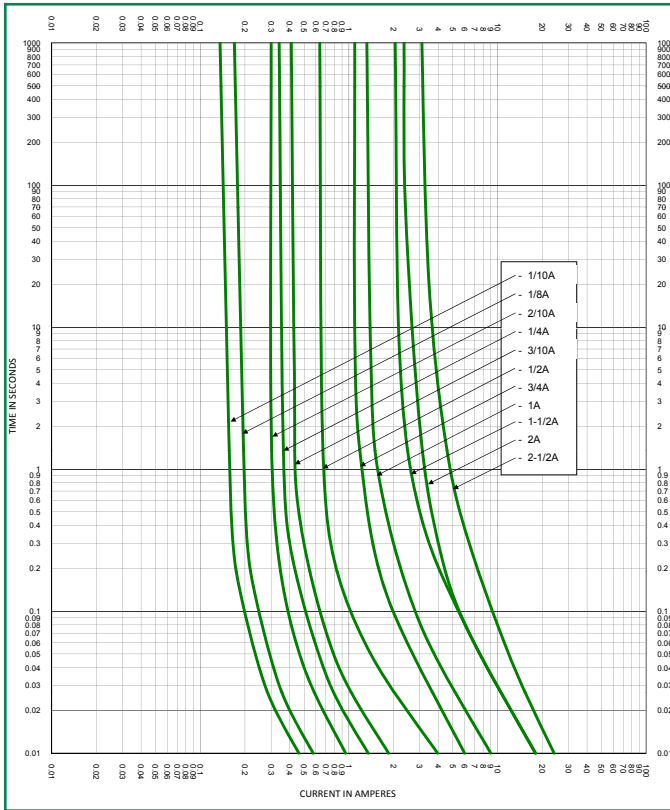

**Time Current Curve (3 - 12 A)**

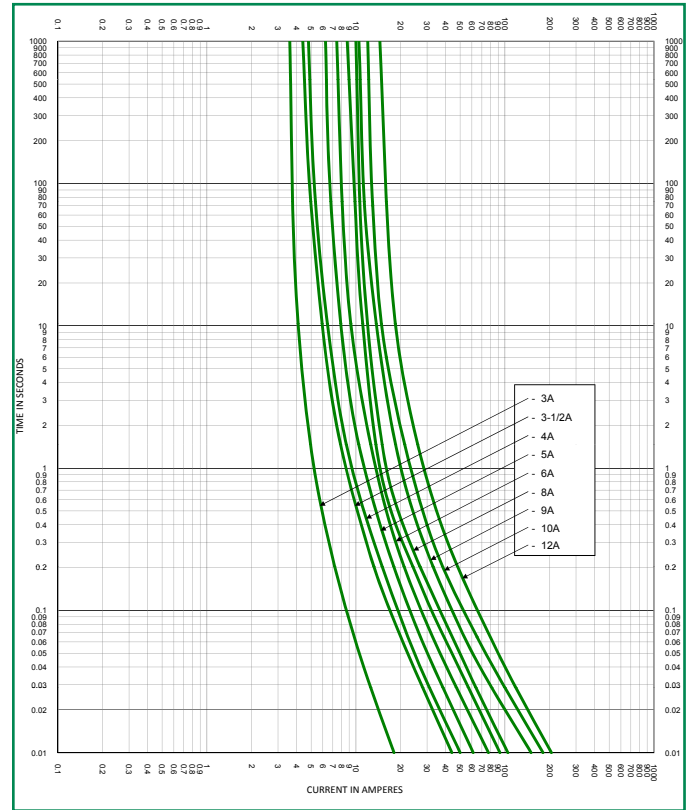

**Time Current Curve (15 - 30 A)**

