

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Miniature Fuse, 10.3 x 38 mm, gG, 500 VAC



IEC 60269-2 · 500 VAC



### Description

- "gG" indicated fuse-links with a full-range breaking capacity for general application

### Standards

- IEC 60269-2-1
- NF C 63-210

### Applications

- Industrial electronic

### References

This type is Phase-out without alternate type  
Last order date: 31.12.2012



### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


### Technical Data

Rated Voltage	400 - 500 VAC
Rated current	0.5 - 32 A
Breaking Capacity	120 kA
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Terminals	Silver-Plated Copper Alloy
Material: Tube	Ceramic
Unit Weight	8 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Rated current, Rated voltage, Breaking Capacity

### Dimension

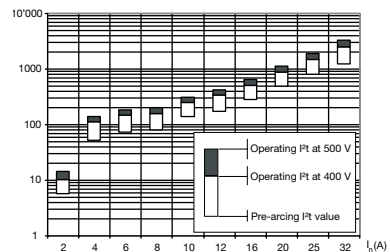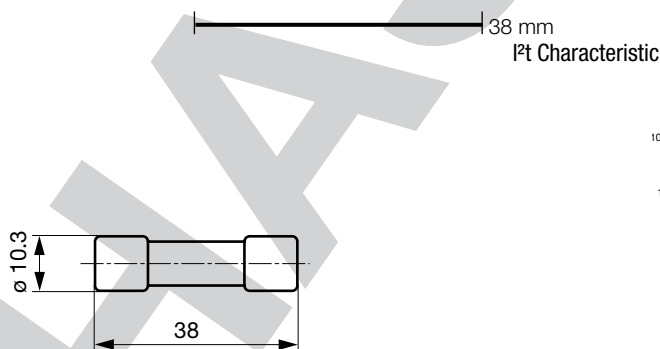


## Peak Let-Thru Current Data



1) Asymmetrical Short Circuit  $2.55 \cdot I_p$

## Time-Current-Curves

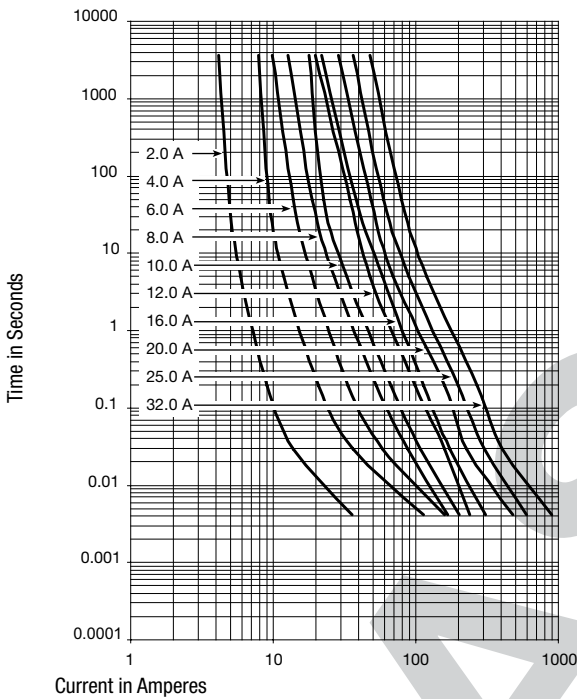

## All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Power Dissipation $1.0 I_n$ typ. [mW]	Order Number
0.5	500	1)	-	7181.4120
1	500	1)	270	7181.4121
2	500	1)	400	7181.4122
4	500	1)	600	7181.4123
6	500	1)	850	7181.4124
8	500	1)	1000	7181.4125
10	500	1)	1200	7181.4126
12	500	1)	1400	7181.4127
16	500	1)	1600	7181.4128
20	500	1)	1900	7181.4129
25	500	1)	2300	7181.4130
32	400	2)	2900	7181.4131

---

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Power Dissipation 1.0 I <sub>n</sub> typ. [mW]	Order Number
-------------------	---------------------	-------------------	--	--------------

---

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) 120 kA @ 500 VAC
- 2) 120 kA @ 400 VAC

---

**Packaging Unit**      Small Box Pack (10 pcs.)

---